

ELECTRICAL SPECIFICATIONS

Frequency Range: 2.45-2.75 GHz


Insertion Loss: 0.60 dB max.

Isolation: 46 dB min.

VSWR: 1.20 max.

Direction: Clockwise

Revisions			
Rev	Description	Date	Approved:
A	Initial Release	2014.9.29	A. M

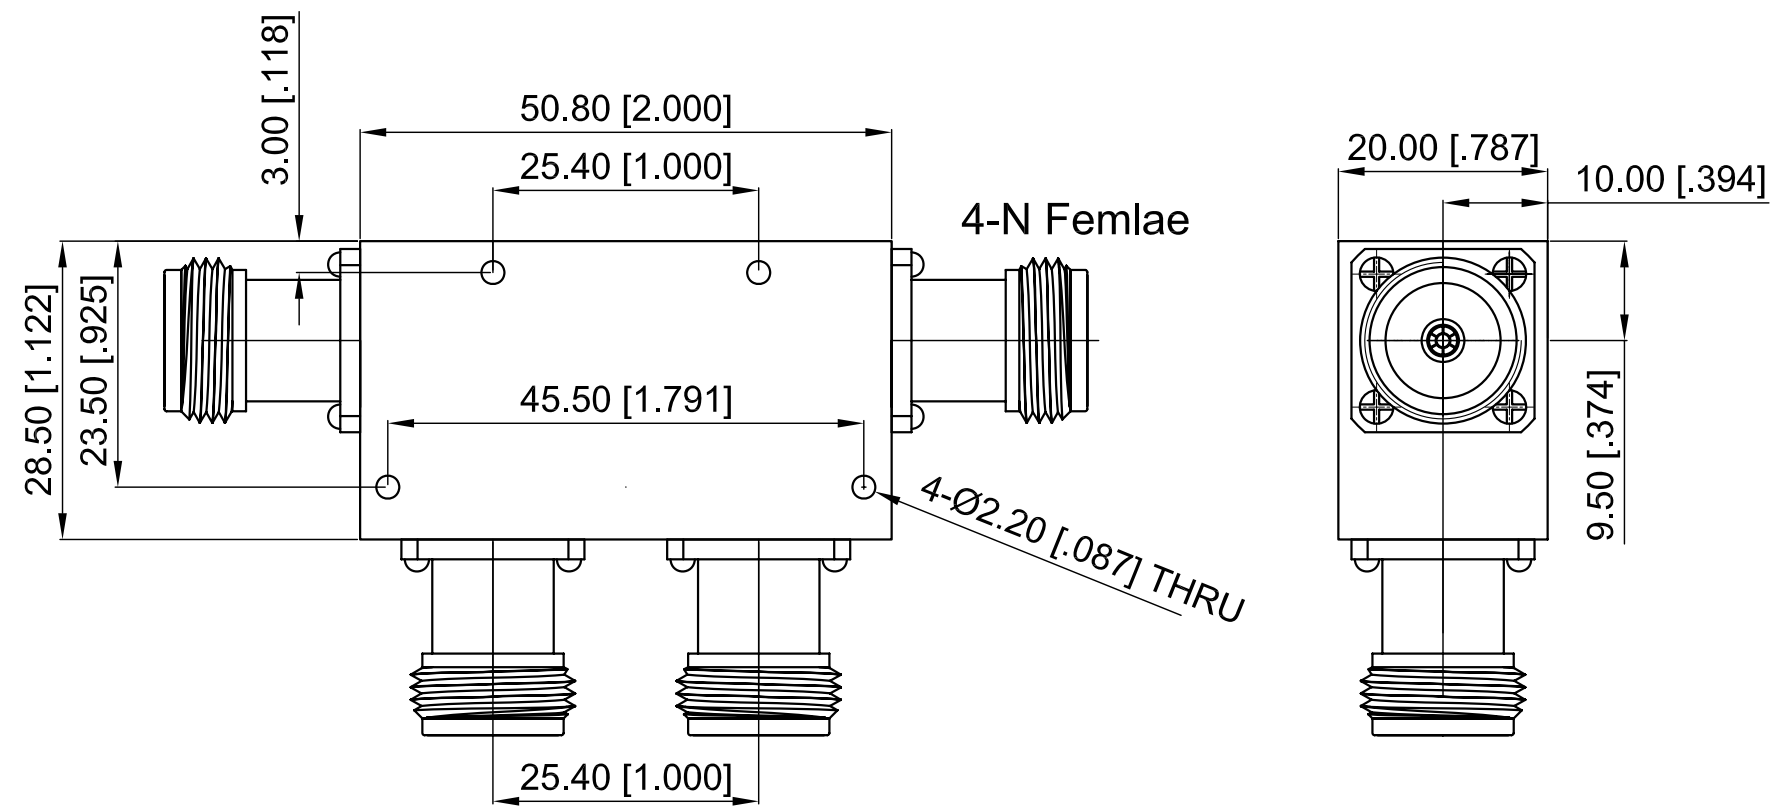

- NOTES:
1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
 2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

Drawn:	W. Y 2014.9.29
Checked:	T. L 2014.9.29
Approved:	A. M 2014.9.29
Unless Otherwise Specified Dimensions are in Millimeters, Dimensions in [] are in Inches for Customer Reference Only. Unless Otherwise Specified Tolerance are: .XX ±0.13 [.005"] .X ±0.20 [.008"] X ±0.50 [.019"] .X° ±1° X° ±2°	

Title:	Dual-junction N Circulators Freq 2.45-2.75 GHz
Part No:	DCC245275I

DEEWAVE
www.deewave.com

View:

Size: A3	Scale: 1:1	Sheet: 1/1	Rev: A
----------	------------	------------	--------