


ELECTRICAL SPECIFICATIONS

Frequency Range: 2.5-2.7 GHz
 Impedance: 50 Ohm
 Insertion Loss: 0.30 dB max.
 Isolation: 23 dB min.
 VSWR: 1.20 max.
 Direction: Clockwise

Revisions			
Rev	Description	Date	Approved:
A	Initial Release	2014.11.25	A. M

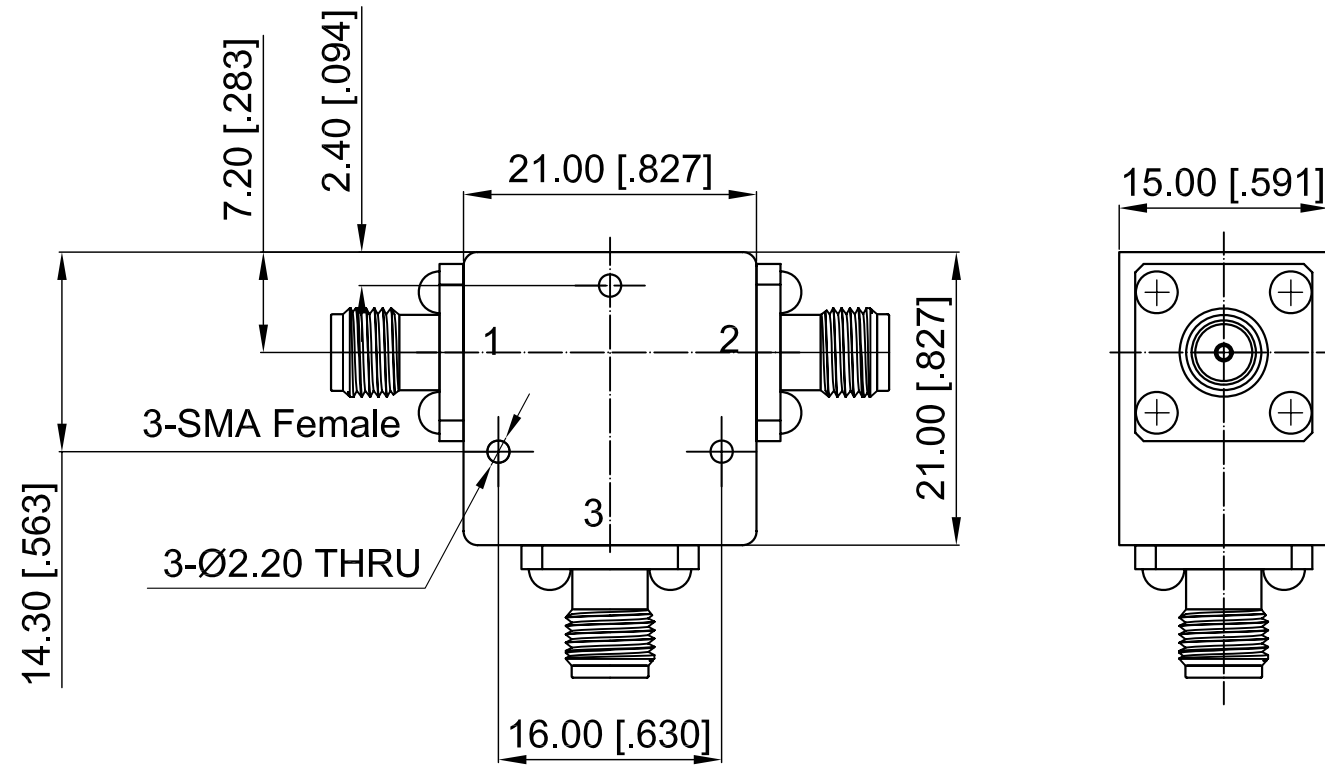

1

NOTES:

- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
- CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

Drawn:	W. Y 2014.11.25
Checked:	T. L 2014.11.25
Approved:	A. M 2014.11.25
Unless Otherwise Specified Dimensions are in Millimeters, Dimensions in [] are in Inches for Customer Reference Only.	
Unless Otherwise Specified Tolerance are:	
.XX ±0.13 [0.005"]	.X ±0.20 [0.008"] X ±0.50 [0.019"]
.X° ±1°	X° ±2°

Title:	SMA Circulator Freq 2.5-2.7 GHz
Part No:	DCC250270

DEEWAVE
www.deewave.com

View:

Size: A3	Scale: 1:1	Sheet: 1/1	Rev: A
----------	------------	------------	--------