


**ELECTRICAL SPECIFICATIONS**

Frequency Range: 4-8 GHz  
 Impedance: 50 Ohm  
 Insertion Loss: 0.5 dB max.  
 Isolation: 18 dB min.  
 VSWR: 1.30 max.  
 Forward Power: 50 W  
 Reserve Power: 20 W

Revisions			
Rev	Description	Date	Approved:
A	Initial Release	2014.04.12	A. M

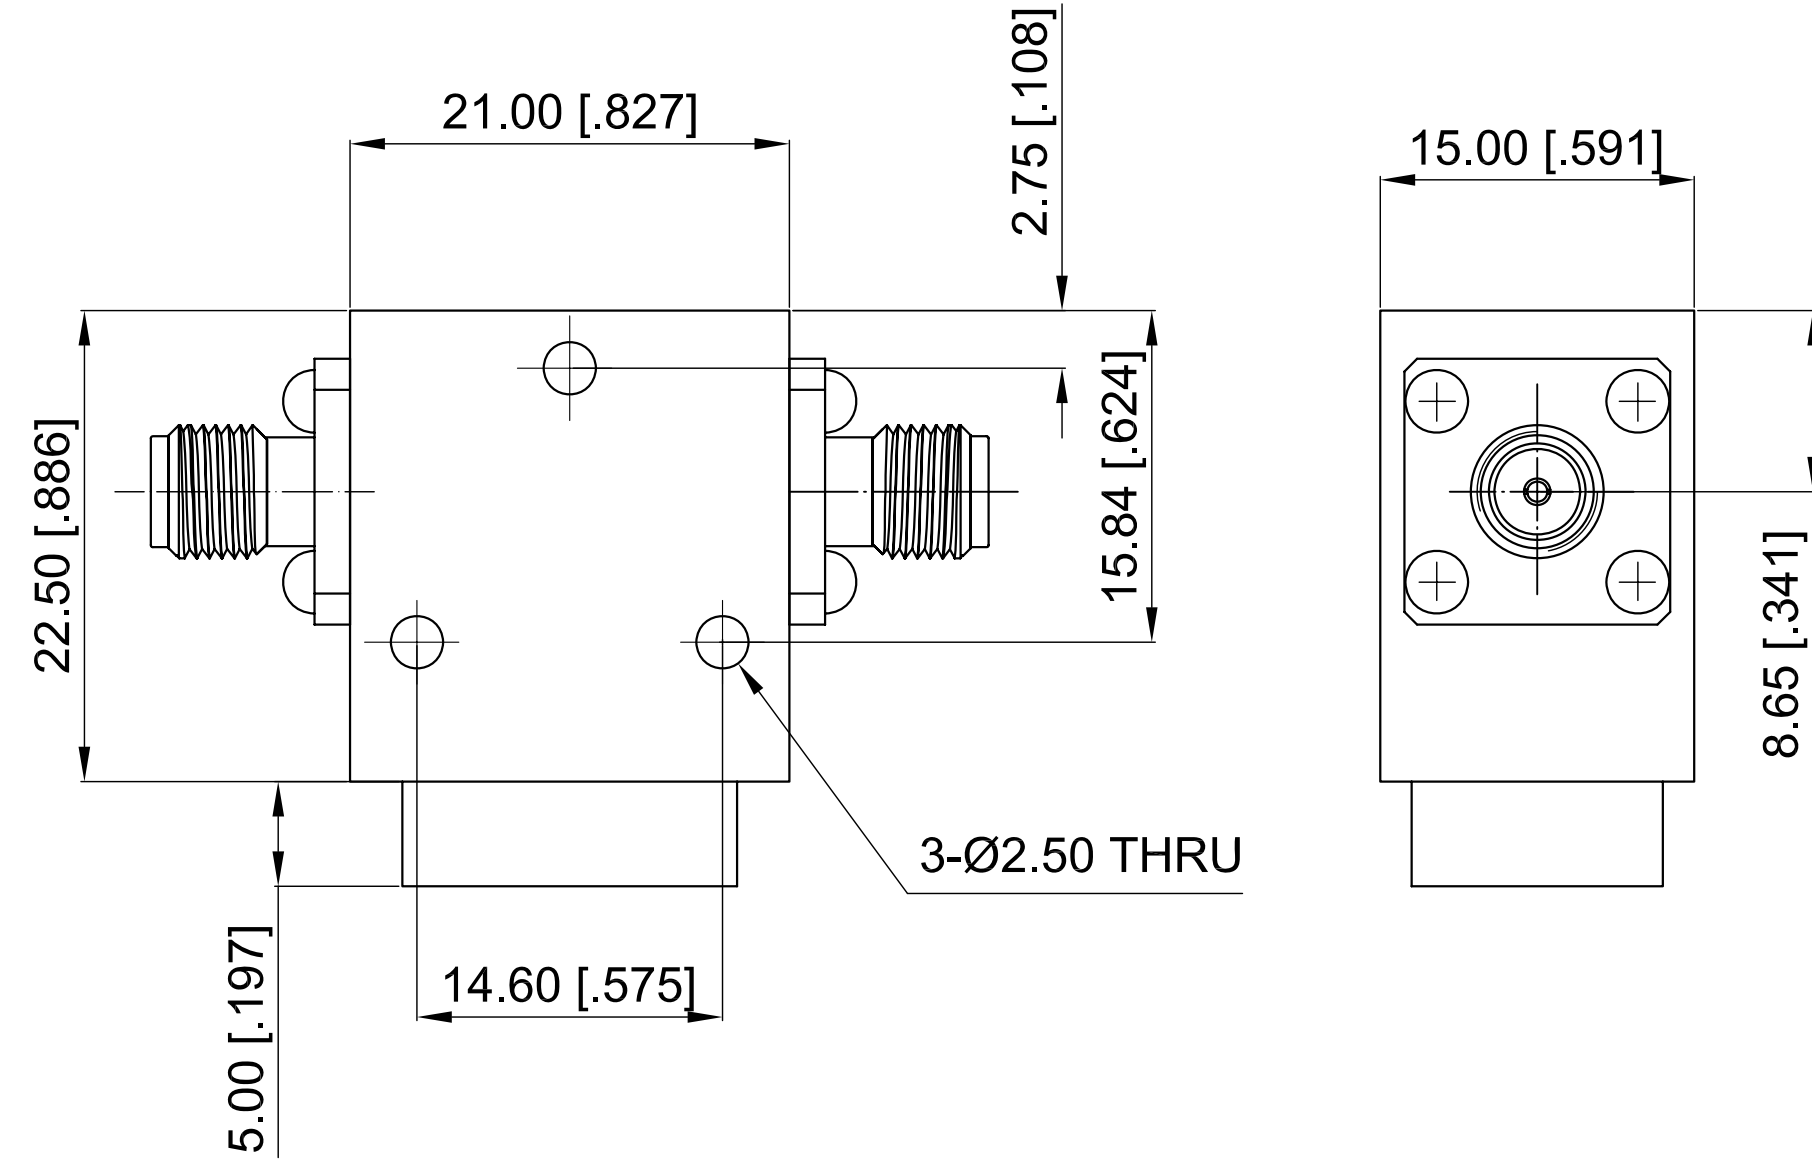

NOTES:  
 1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME  
 2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

Drawn:	W. Y 2014.04.12
Checked:	T. L 2014.04.12
Approved:	A. M 2014.04.12
Unless Otherwise Specified Dimensions are in Millimeters, Dimensions in [ ] are in Inches for Customer Reference Only.	
Unless Otherwise Specified Tolerance are:	
.XX ±0.13 [.005"]	.X ±0.20 [.008"] X ±0.50 [.019"]
.X° ±1°	X° ±2°

Title:	SMA Female Isolator Freq 4-8 GHz
Part No:	DCI400800B

**DEEWAVE**  
[www.deewave.com](http://www.deewave.com)

View:

Size: A3	Scale: 4:1	Sheet: 1/1	Rev: A
----------	------------	------------	--------