

6

5

4

3


2

1

Revisions

Rev	Description	Date	Approved:
A	Initial Release	2015.5.12	A. M

**ELECTRICAL SPECIFICATIONS**  
 Frequency Range: 1805-1880 MHz  
 Insertion Loss: 0.3 dB max.  
 Isolation: 23 dB min.  
 VSWR: 1.20 max.  
 Forward Power: 60 W  
 Reverse Power: 10W  
 Direction: Clockwise

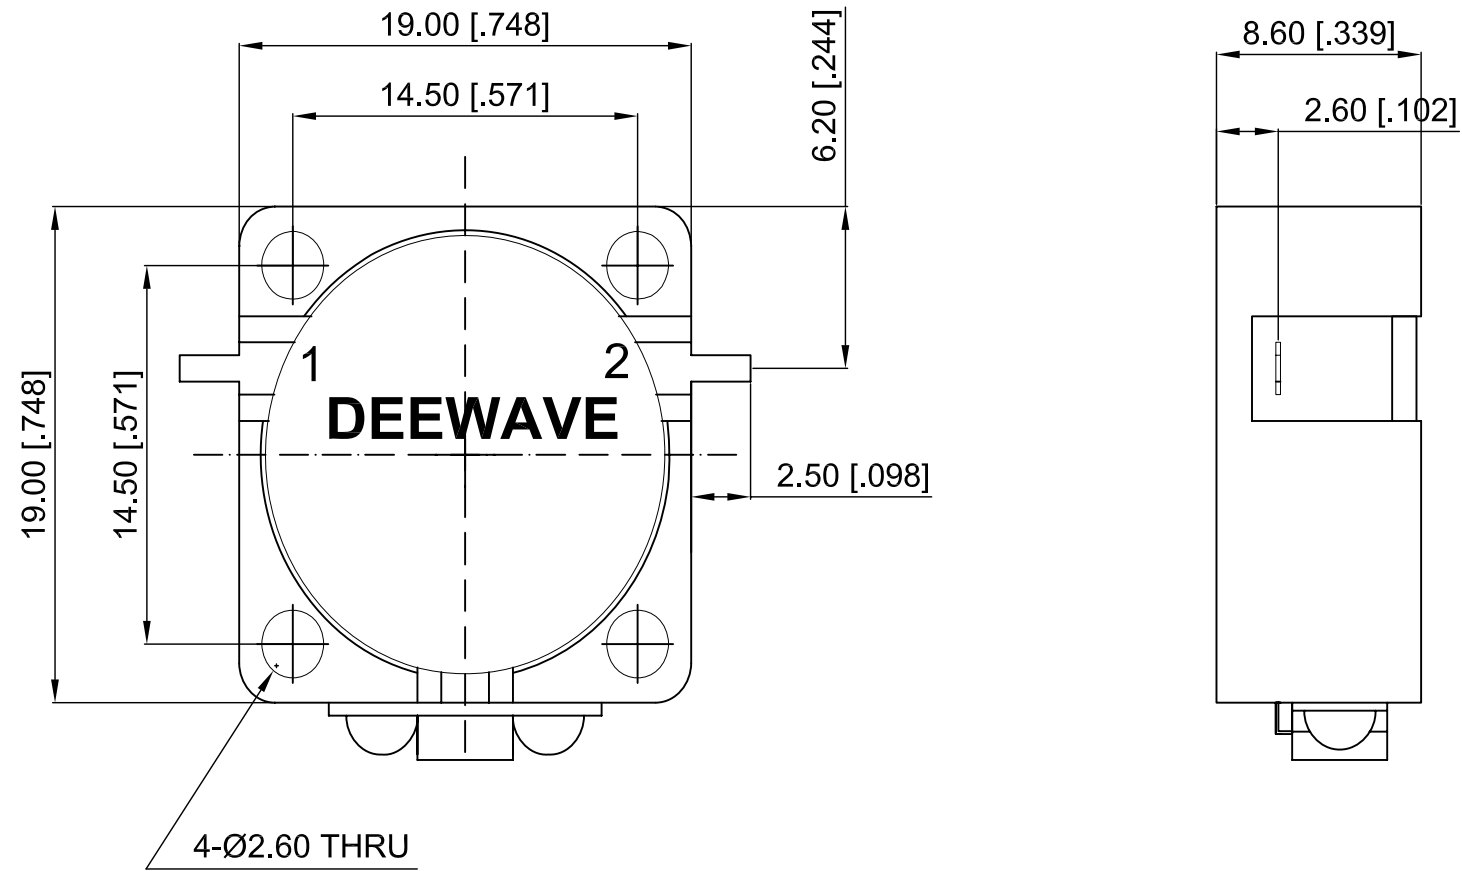

- NOTES:
1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
  2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

Drawn:	W. Y 2015.5.12
Checked:	T. L 2015.5.12
Approved:	A. M 2015.5.12
Unless Otherwise Specified Dimensions are in Millimeters, Dimensions in [ ] are in Inches for Customer Reference Only. Unless Otherwise Specified Tolerance are: .XX ±0.13 [.005"] .X ±0.20 [.008"] X ±0.50 [.019"] .X° ±1° X° ±2°	

Title:	Drop-in Isolator Freq 1805-1880 MHz
Part No:	



View:	
Size:	A3
Scale:	3:1
Sheet:	1/1
Rev:	A

6

5

4

3

2

1