


**ELECTRICAL SPECIFICATIONS**

Frequency Range: 10.10-10.70 GHz  
 Impedance: 50 Ohm  
 Insertion Loss: 0.30 dB max.  
 Isolation: 23 dB min.  
 VSWR: 1.20 max.  
 Forward Power: 30 W  
 Direction: Clockwise

Revisions			
Rev	Description	Date	Approved:
A	Initial Release	2014.10.29	A. M

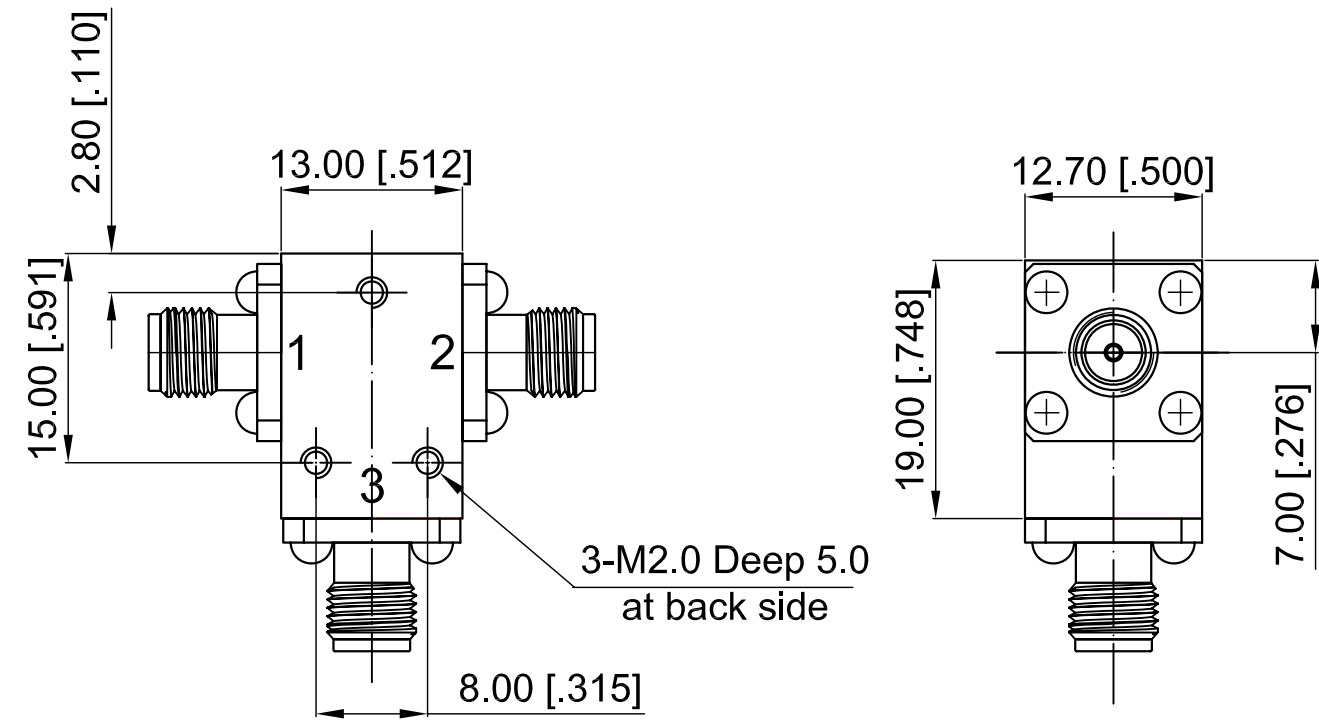

NOTES:  
 1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME  
 2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

Drawn:	W. Y 2014.10.29
Checked:	T. L 2014.10.29
Approved:	A. M 2014.10.29
Unless Otherwise Specified Dimensions are in Millimeters, Dimensions in [ ] are in Inches for Customer Reference Only. Unless Otherwise Specified Tolerance are: .XX ±0.13 [.005"] .X ±0.20 [.008"] X ±0.50 [.019"] .X° ±1° X° ±2°	

Title:	SMA Female Circulator Freq 10.10-10.70 GHz
Part No:	DCC10101070



View:	
Size:	A3
Scale:	1:1
Sheet:	1/1
Rev:	A