




ELECTRICAL SPECIFICATIONS

Frequency Range: 2-4 GHz
 Impedance: 50 Ohm
 Insertion Loss: 0.60 dB max.
 Isolation: 17 dB min.
 VSWR: 1.35 max.
 Forward Power: 100 W
 Direction: Clockwise

Revisions			
Rev	Description	Date	Approved:
A	Initial Release	2014.10.29	A. M
B	Power Updated to 100W	2015.11.13	A. M
C	Outline Updated	2021.11.16	A. M

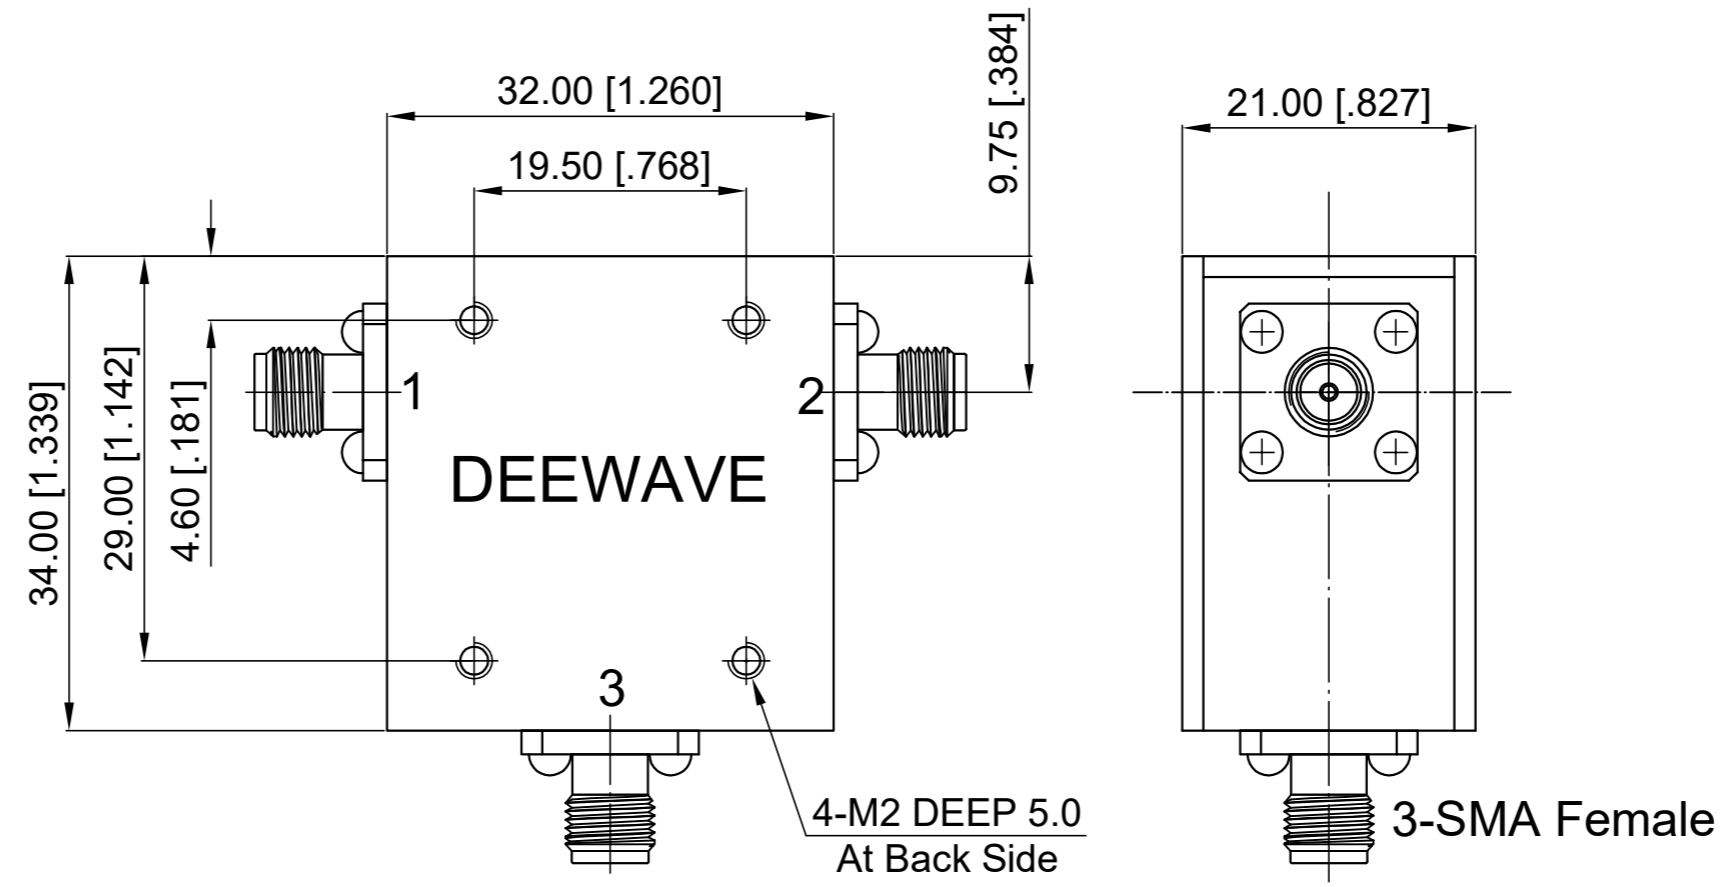

NOTES:
 1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
 2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

Drawn: W. Y 2021.11.16	Title: SMA Female Circulator Freq 2-4 GHz	 www.deewave.com	
Checked: T. L 2021.11.16			
Approved: A. M 2021.11.16			
Unless Otherwise Specified Dimensions are in Millimeters, Dimensions in [] are in Inches for Customer Reference Only. Unless Otherwise Specified Tolerance are: .XX ±0.13 [.005"] .X ±0.20 [.008"] X ±0.50 [.019"] .X° ±1° X° ±2°		Part No: DCC200400B	View: 
Size: A3	Scale: 1:1	Sheet: 1/1	Rev: C