
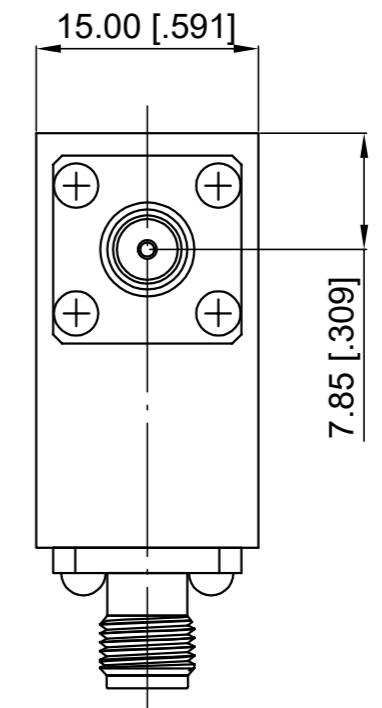


**ELECTRICAL SPECIFICATIONS**

Frequency Range: 3.5-5 GHz  
 Impedance: 50 Ohm  
 Insertion Loss: 0.50 dB max.  
 Isolation: 18 dB min.  
 VSWR: 1.35 max.  
 Forward Power: 100W  
 Direction: Clockwise

Revisions			
Rev	Description	Date	Approved:
A	Initial Release	2019.5.5	A. M

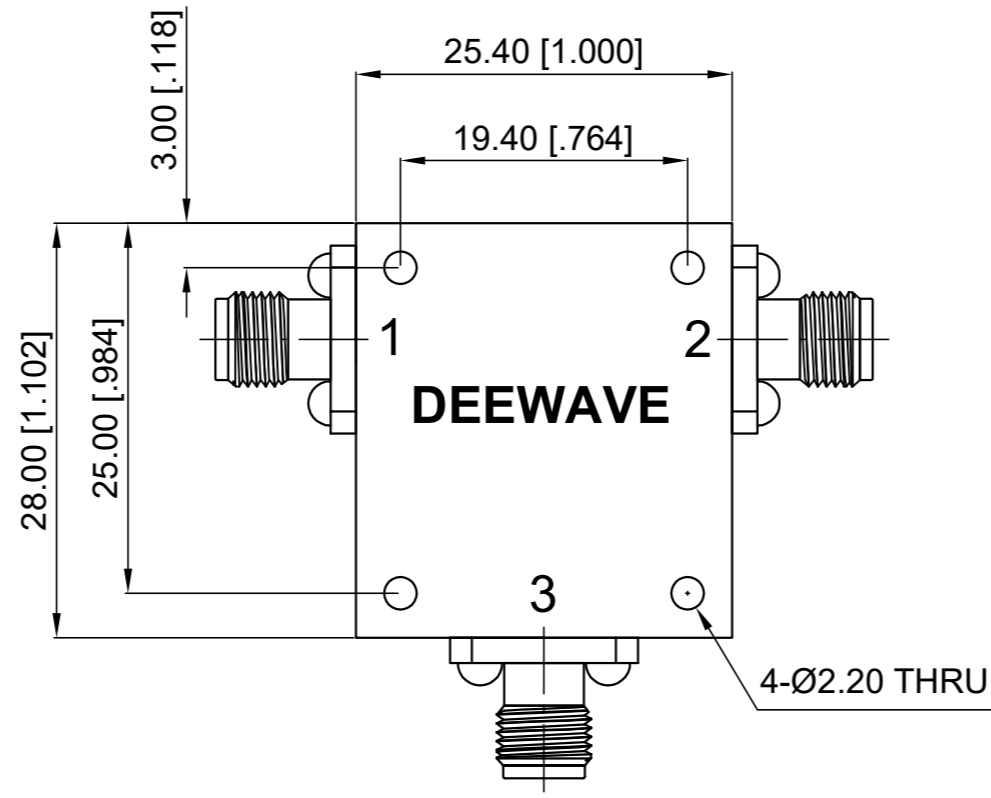

NOTES:  
 1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME  
 2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

Drawn:	W. Y 2019.5.5
Checked:	T. L 2019.5.5
Approved:	A. M 2019.5.5
Unless Otherwise Specified Dimensions are in Millimeters, Dimensions in [ ] are in Inches for Customer Reference Only. Unless Otherwise Specified Tolerance are: .XX ±0.13 [.005"] .X ±0.20 [.008"] X ±0.50 [.019"] .X° ±1° X° ±2°	

Title:	SMA Female Circulator Freq 3.5-5 GHz
Part No:	DCC350500

**DEEWAVE**  
www.deewave.com

View:

Size: A3	Scale: 2:1	Sheet: 1/1	Rev: A
----------	------------	------------	--------