

ELECTRICAL SPECIFICATIONS

Frequency Range: 450-470 MHz

Insertion Loss: 0.30 dB max.

Isolation: 23 dB min.

VSWR: 1.20 max.


Forward power: 150W

Reverse power: 20W

Direction: Clockwise

Operation Temp.: -30~+75°C

Revisions			
Rev	Description	Date	Approved:
A	Initial Release	2014.9.22	A. M
B	Outline Updated	2024.1.5	A. M

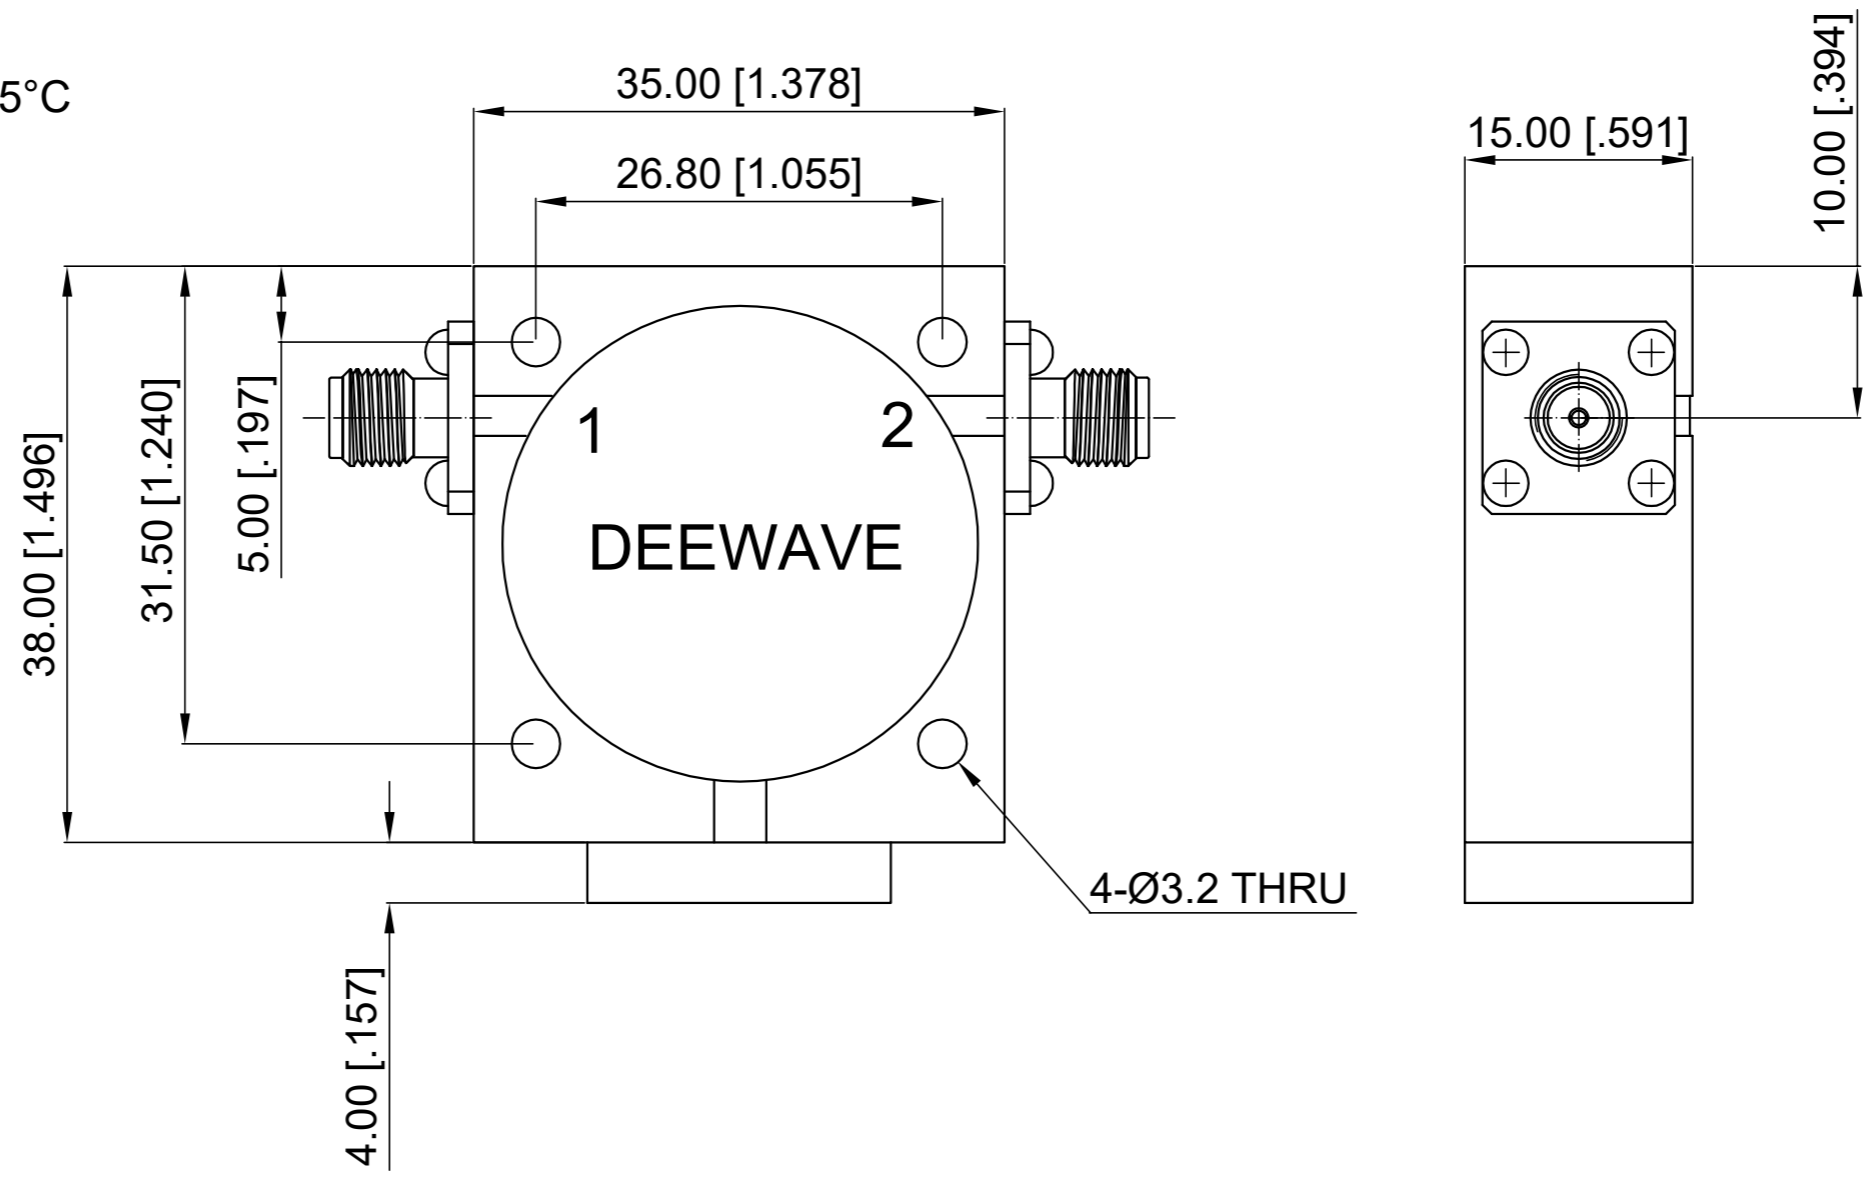

- NOTES:
1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
 2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

Drawn:	W. Y 2024.1.5
Checked:	T. L 2024.1.5
Approved:	A. M 2024.1.5
Unless Otherwise Specified Dimensions are in Millimeters, Dimensions in [] are in Inches for Customer Reference Only. Unless Otherwise Specified Tolerance are: .XX ±0.13 [.005"] .X ±0.20 [.008"] X ±0.50 [.019"] .X° ±1° X° ±2°	

Title:	SMA Female Isolator Freq 450-470 MHz
Part No:	

DEEWAVE
www.deewave.com

View:

Size:	Scale:	Sheet:	Rev:
A3	2:1	1/1	B