

ELECTRICAL SPECIFICATIONS

Frequency Range: 2-6 GHz

Impedance: 50 Ohm

Insertion Loss: 1.3 dB max.

Isolation: 15 dB min.

Input VSWR: 1.40 max.

Output VSWR: 1.40 max.


Forward Power: 100 W

Reserve Power: 10 W

Direction: Clockwise

Operation Temp.: +10~+60°C

| Revisions | | | |
|-----------|---------------------|-----------|-----------|
| Rev | Description | Date | Approved: |
| A | Initial Release | 2021.8.23 | A. M |
| B | Output VSWR Updated | 2021.12.7 | A. M |

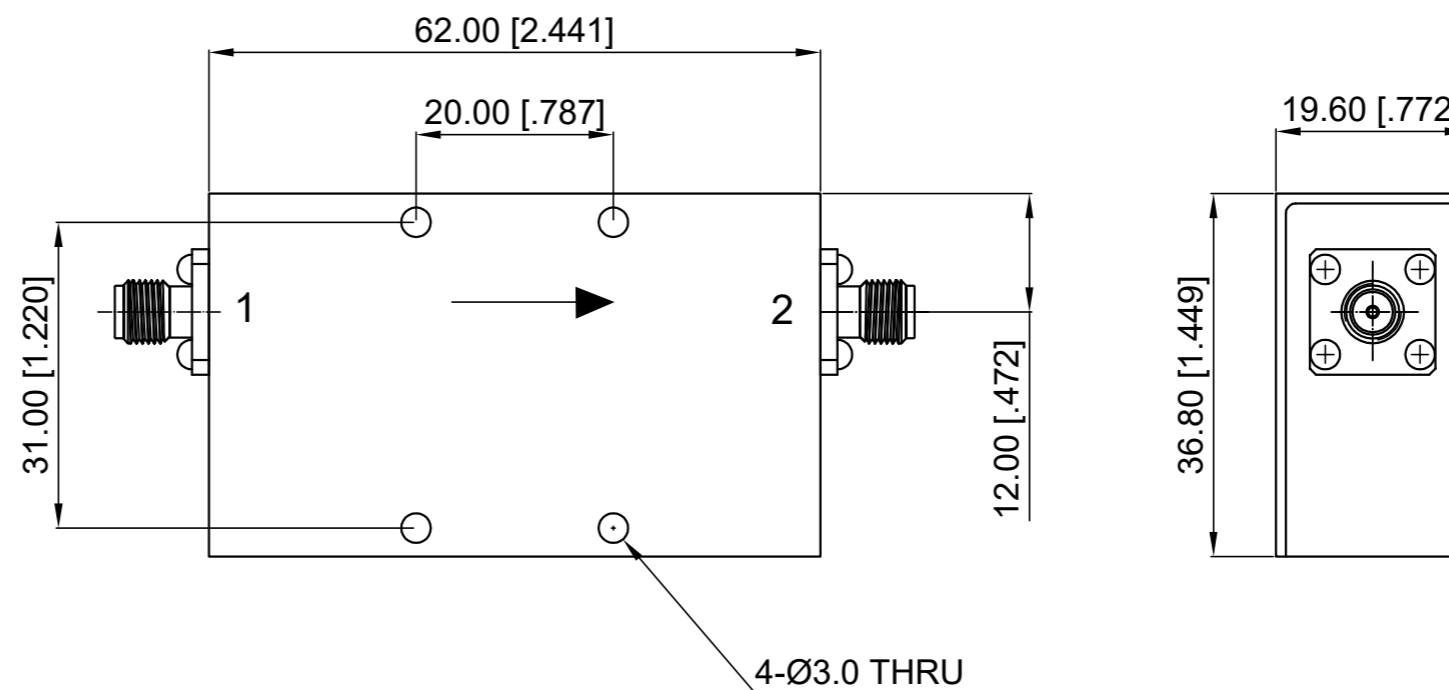

NOTES:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

| | |
|--|----------------|
| Drawn: | W. Y 2021.12.7 |
| Checked: | T. L 2021.12.7 |
| Approved: | A. M 2021.12.7 |
| Unless Otherwise Specified Dimensions are in Millimeters, Dimensions in [] are in Inches for Customer Reference Only. Unless Otherwise Specified Tolerance are: .XX ±0.13 [.005"] .X ±0.20 [.008"] X ±0.50 [.019"] .X° ±1° X° ±2° | |

| | |
|----------|-------------------------------------|
| Title: | SMA Female Isolator Freq 2-6 GHz |
| Part No: | DCI200600BEG |

DEEWAVE
www.deewave.com

View:

| | | | |
|-------|--------|--------|------|
| Size: | Scale: | Sheet: | Rev: |
| A3 | 1.5:1 | 1/1 | B |