


Revisions			
Rev	Description	Date	Approved:
A	Initial Release	2015.10.31	A. M

ELECTRICAL SPECIFICATIONS

Frequency Range: 60-88 MHz
 Insertion Loss : 1.6 dB Max.
 Isolation : 16 dB Min.
 VSWR: 1.40 Max.
 Forward Power: 100 W
 Direction: Clockwise
 Operation Temp.: 0~+60°C

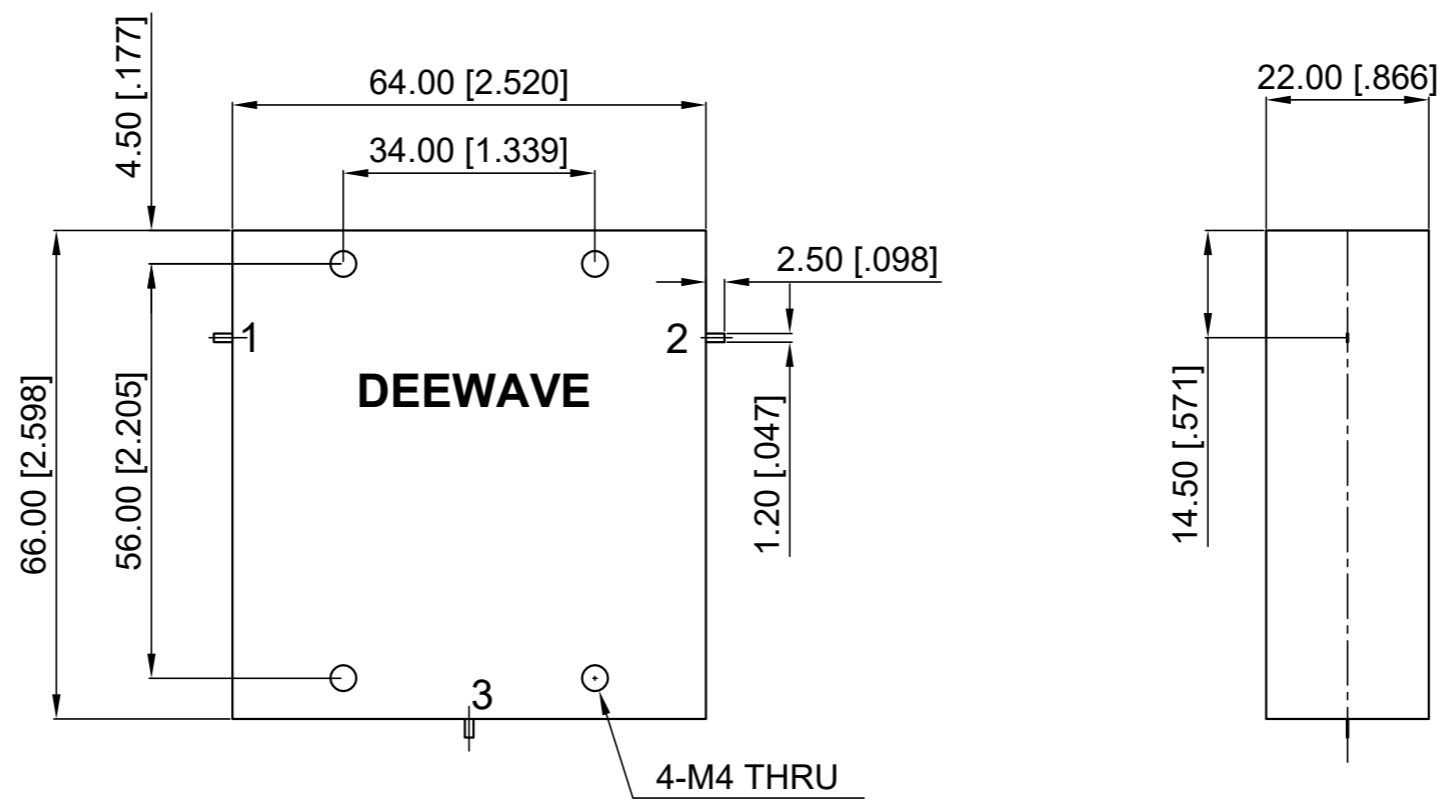

NOTES:
 1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
 2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

Drawn:	W. Y 2015.10.31
Checked:	T. L 2015.10.31
Approved:	A. M 2015.10.31
Unless Otherwise Specified Dimensions are in Millimeters, Dimensions in [] are in Inches for Customer Reference Only. Unless Otherwise Specified Tolerance are: .XX ±0.13 [.005"] .X ±0.20 [.008"] X ±0.50 [.019"] .X° ±1° X° ±2°	

Title:	Drop-in Circulator Freq 60-88 MHz
Part No:	

DEEWAVE
www.deewave.com

View:

Size: A3	Scale: 1:1	Sheet: 1/1	Rev: A
----------	------------	------------	--------