

**ELECTRICAL SPECIFICATIONS**

Frequency Range: 1166-1611 MHz

Impedance: 50 Ohm

Insertion Loss: 0.5 dB max.

Isolation: 17 dB min.


VSWR: 1.30 max.

Average Power: 60W

Operation Temp.: -5~+75 °C

Director: Clockwise

Revisions			
Rev	Description	Date	Approved:
A	Initial Release	2018.10.10	A. M

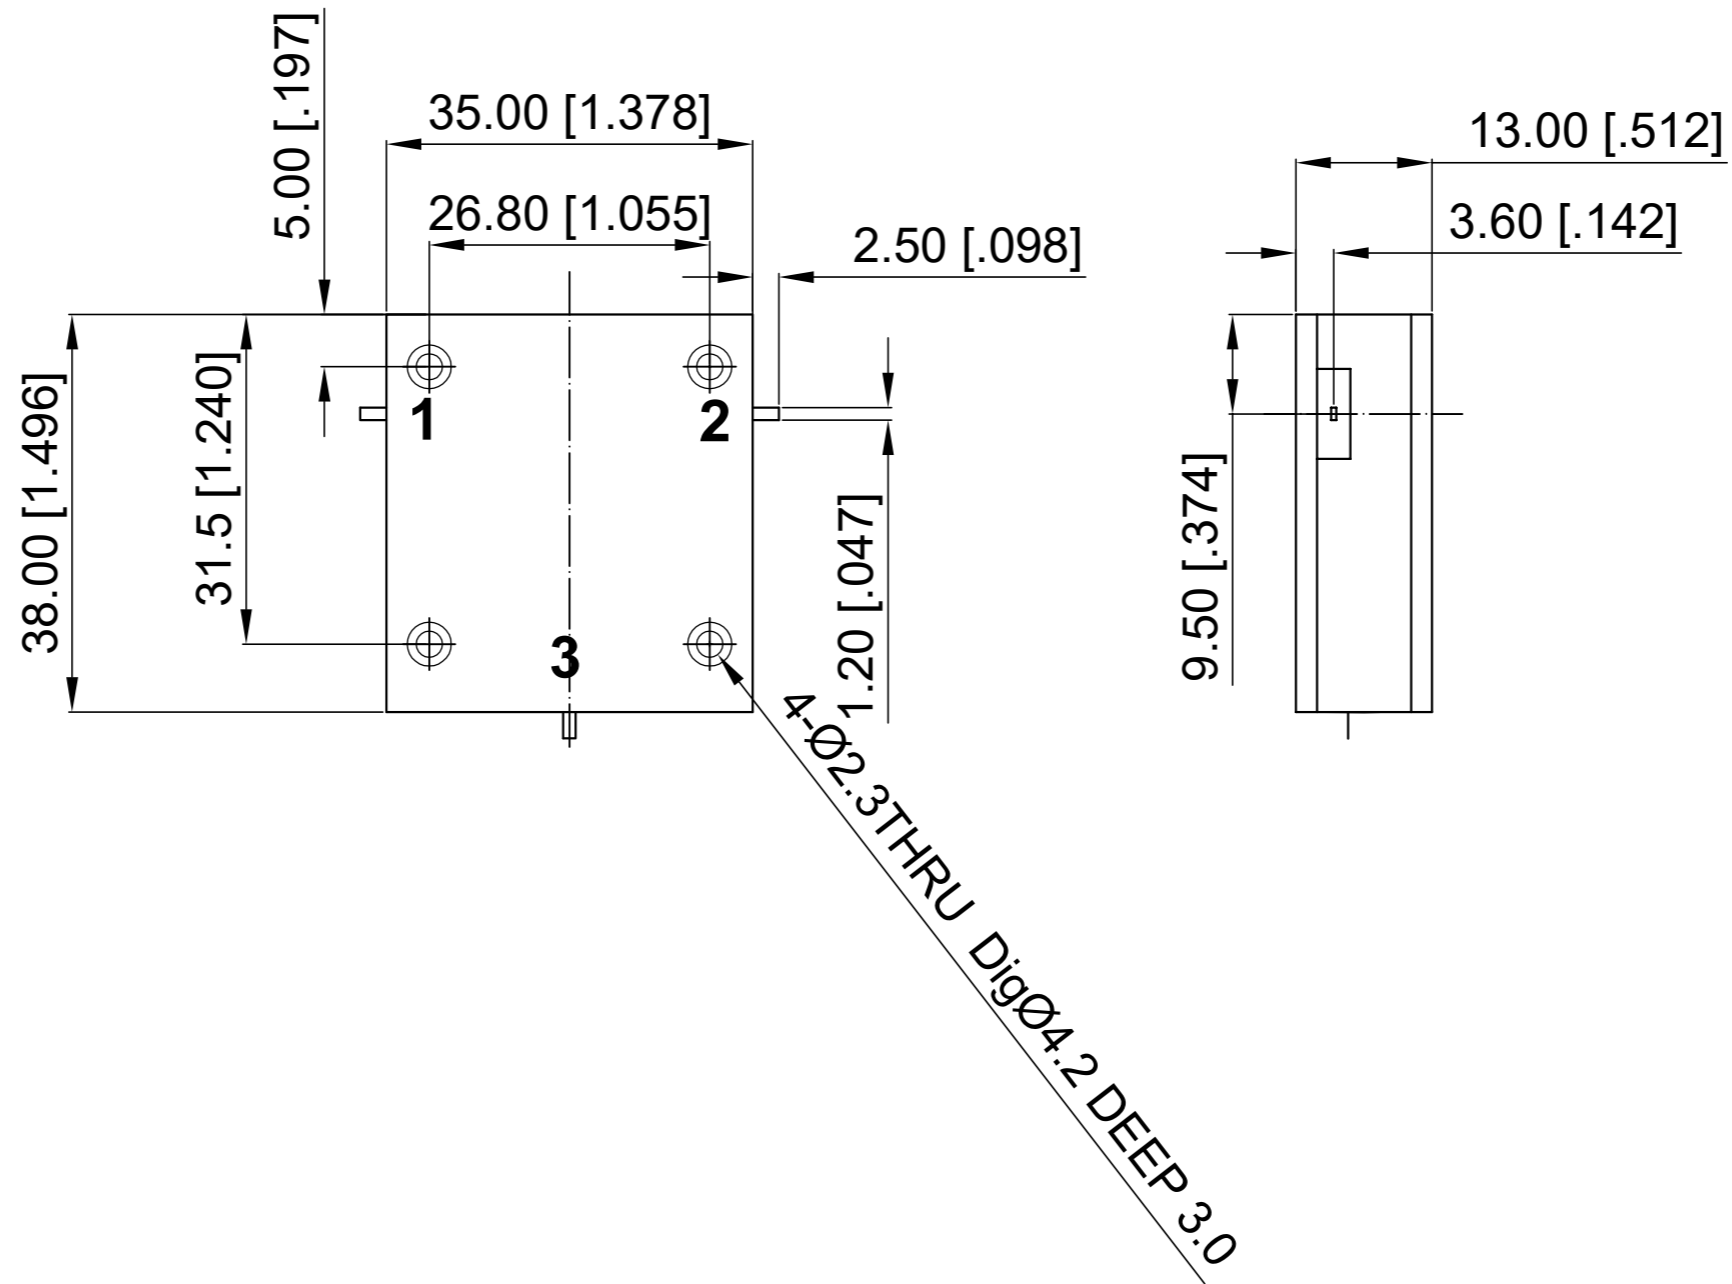

NOTES:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

Drawn:	W. Y 2018.10.10
Checked:	T. L 2018.10.10
Approved:	A. M 2018.10.10
Unless Otherwise Specified Dimensions are in Millimeters, Dimensions in [ ] are in Inches for Customer Reference Only. Unless Otherwise Specified Tolerance are: .XX ±0.13 [.005"] .X ±0.20 [.008"] X ±0.50 [.019"] .X° ±1° X° ±2°	

Title:	Drop-in Circulator Freq 1166-1611 MHz
Part No:	

**DEEWAVE**  
www.deewave.com

View:

Size: A3	Scale: 2:1	Sheet: 1/1	Rev: A
----------	------------	------------	--------