

ELECTRICAL SPECIFICATIONS

Frequency Range: 1176-1660 MHz

Impedance: 50 Ohm

Insertion Loss: 0.6 dB max.


Isolation: 15 dB min.

VSWR: 1.45 max.

Forward Power: 100W

Director: Clockwise

Revisions			
Rev	Description	Date	Approved:
A	Initial Release	2019.6.10	A. M

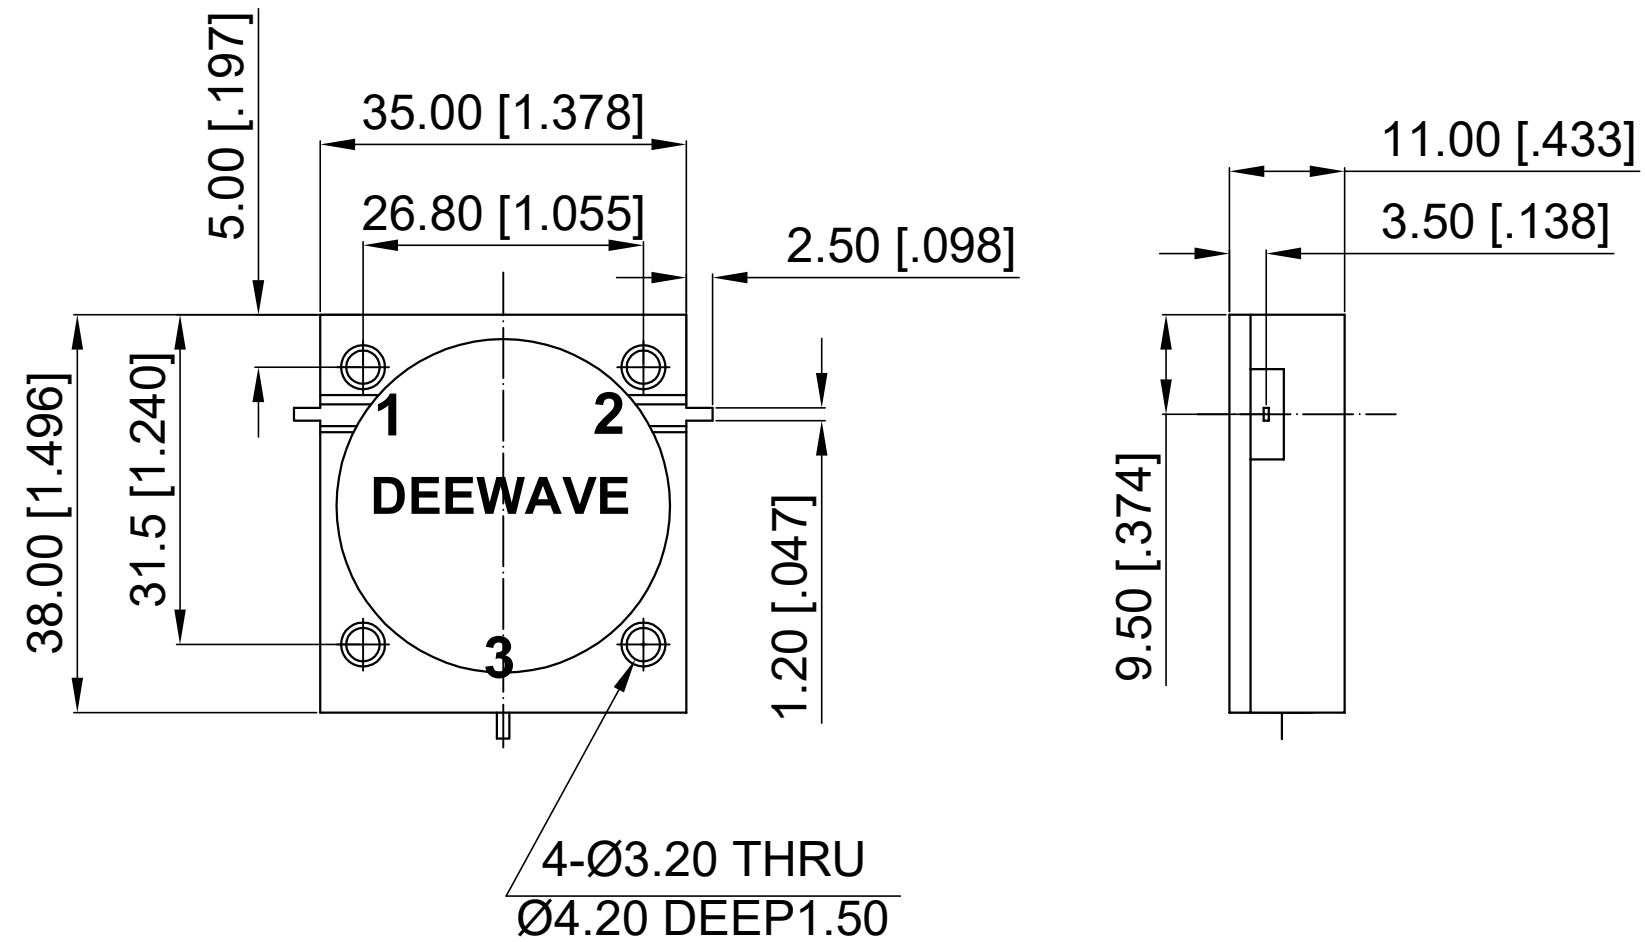

4-Ø3.20 THRU
Ø4.20 DEEP1.50

NOTES:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

Drawn:	W. Y 2019.6.10
Checked:	T. L 2019.6.10
Approved:	A. M 2019.6.10
Unless Otherwise Specified Dimensions are in Millimeters, Dimensions in [] are in Inches for Customer Reference Only. Unless Otherwise Specified Tolerance are: .XX ±0.13 [.005"] .X ±0.20 [.008"] X ±0.50 [.019"] .X° ±1° X° ±2°	

Title:	Drop-in Circulator Freq 1176-1660 MHz
Part No:	DDC117166



View:	
Size:	A3
Scale:	2:1
Sheet:	1/1
Rev:	A