

ELECTRICAL SPECIFICATIONS

Frequency Range: 9.5-10.5 GHz

Impedance: 50 Ohm

Insertion Loss: 0.4 dB max.

Isolation: 20 dB min.


VSWR: 1.25 max.

Forward Power: 30 W

Direction: Clockwise

Operation Temp.: -30~+75°C

Revisions			
Rev	Description	Date	Approved:
A	Initial Release	2021.9.12	A. M

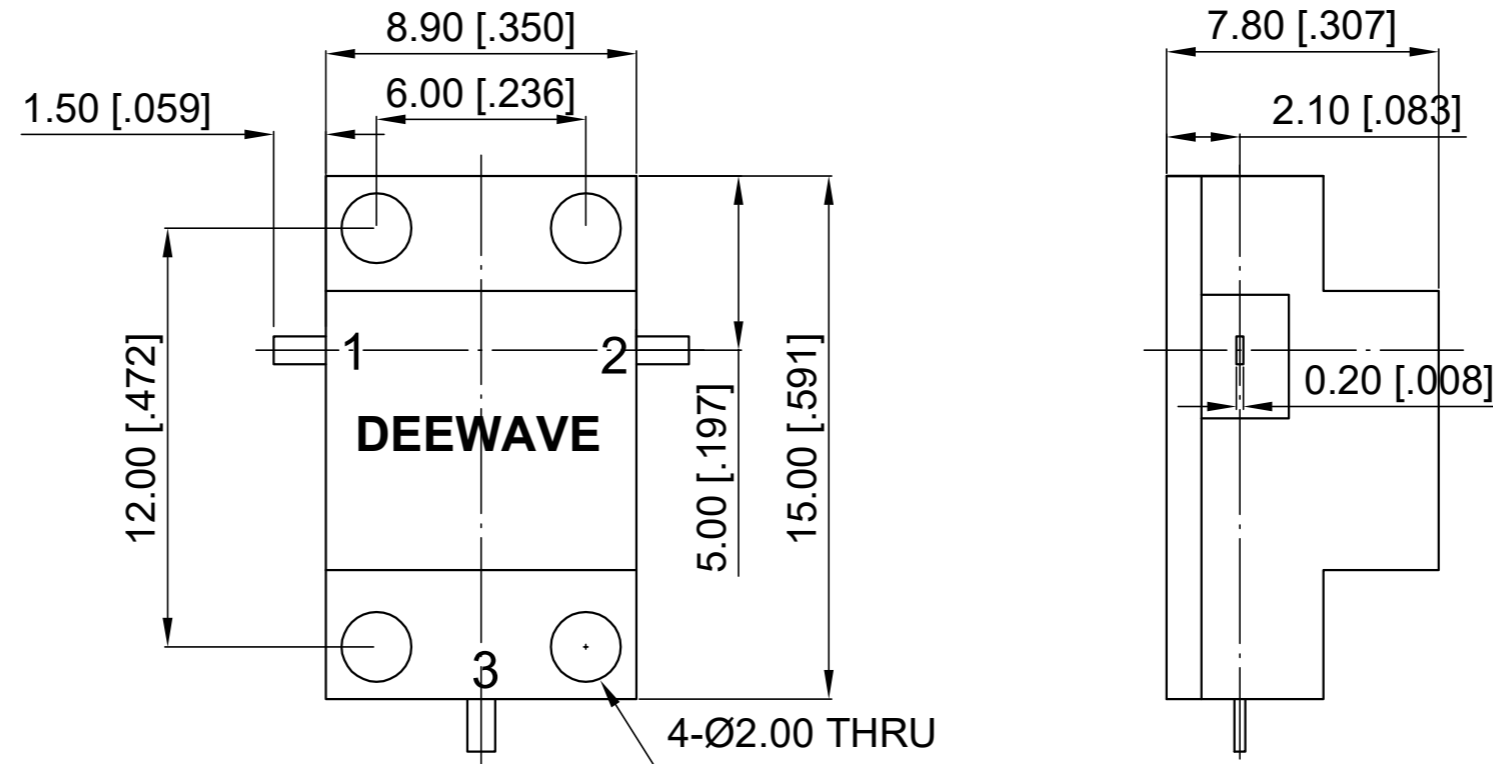

- NOTES:
1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
 2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

Drawn:	W. Y 2021.9.12
Checked:	T. L 2021.9.12
Approved:	A. M 2021.9.12
Unless Otherwise Specified Dimensions are in Millimeters, Dimensions in [] are in Inches for Customer Reference Only. Unless Otherwise Specified Tolerance are: .XX ±0.13 [0.005"] .X ±0.20 [0.008"] X ±0.50 [0.019"] .X° ±1° X° ±2°	

Title:	Drop-in Circulator Freq 9.5-10.5 GHz
Part No:	DDC9501050



View:	
Size:	A3
Scale:	4:1
Sheet:	1/1
Rev:	A