


Revisions			
Rev	Description	Date	Approved:
A	Initial Release	2019.12.31	A. M

**ELECTRICAL SPECIFICATIONS**

Frequency Range: 2-2.4 GHz  
 Insertion Loss: 0.8 dB max.  
 Isolation: 40 dB min.  
 VSWR: 1.25 max.  
 Forward Power: 100 W  
 Direction: Clockwise  
 Operation Temp.: -30~+75°C

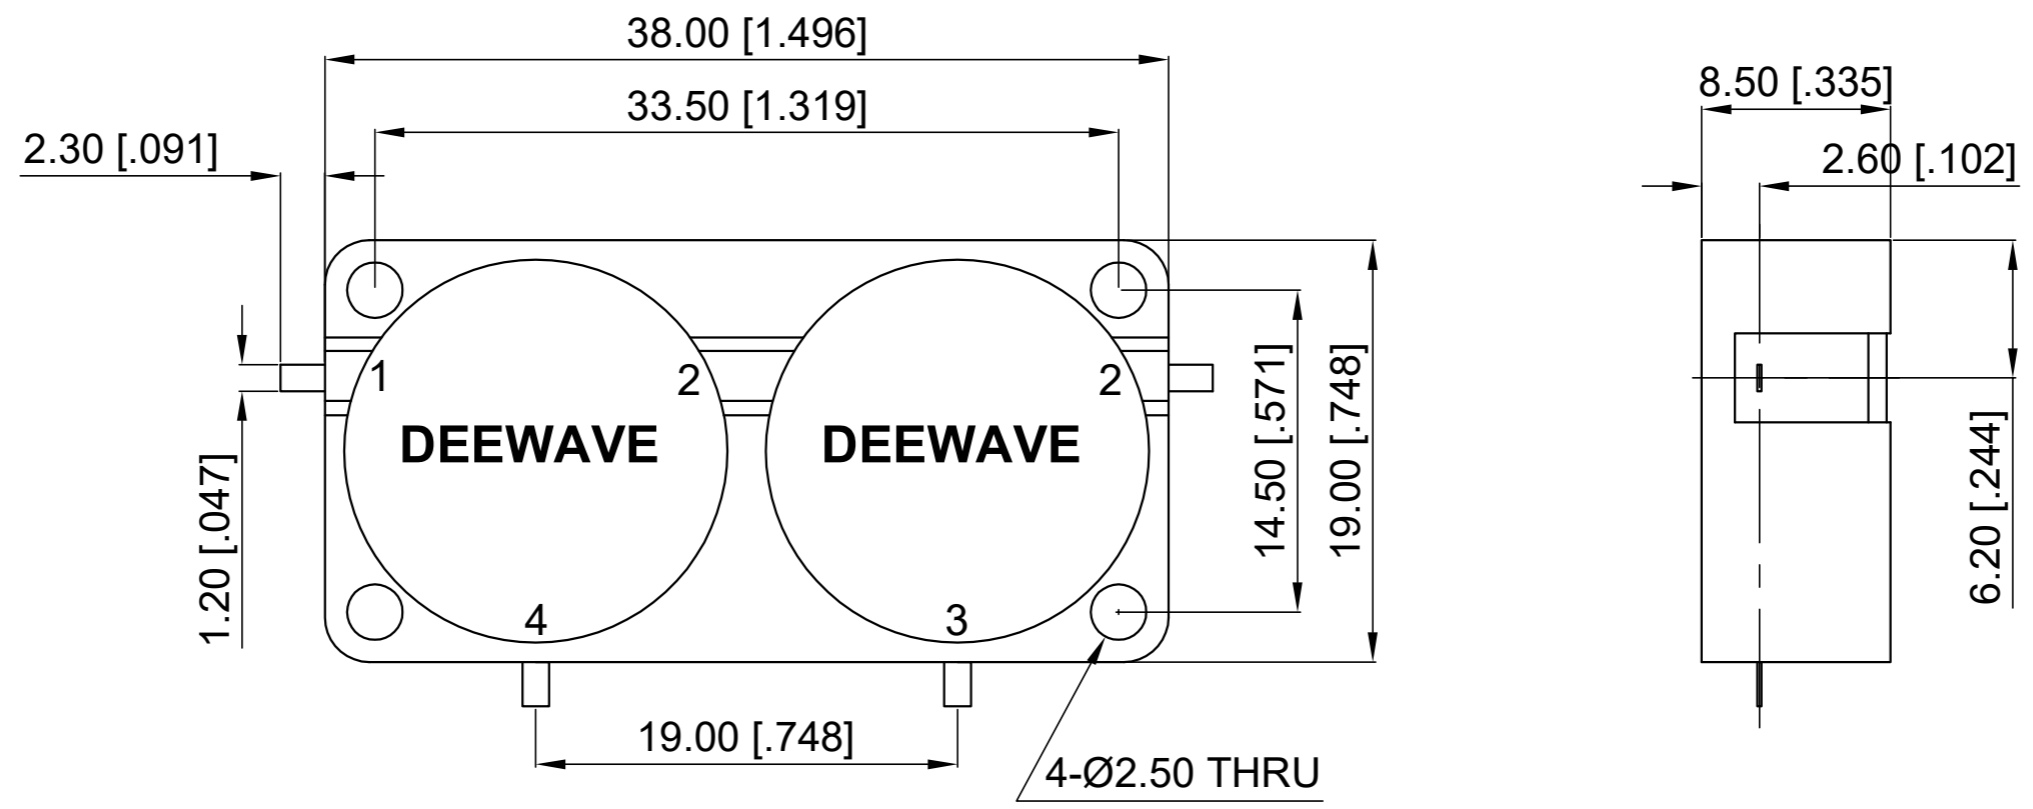

NOTES:  
 1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME  
 2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

Drawn:	W. Y 2019.12.31
Checked:	T. L 2019.12.31
Approved:	A. M 2019.12.31
Unless Otherwise Specified Dimensions are in Millimeters, Dimensions in [ ] are in Inches for Customer Reference Only. Unless Otherwise Specified Tolerance are: .XX ±0.13 [.005"] .X ±0.20 [.008"] X ±0.50 [.019"] .X° ±1° X° ±2°	

Title:  
**Dual-Junction Drop-in  
 Circulator, Freq 2-2.4 GHz**

Part No:  
**DDDC200240**

**DEEWAVE**  
[www.deewave.com](http://www.deewave.com)

View:

Size: A3	Scale: 3:1	Sheet: 1/1	Rev: A
-------------	---------------	---------------	-----------