


ELECTRICAL SPECIFICATIONS

Frequency Range: 10-11 GHz
 Impedance: 50 Ohm
 Insertion Loss: 0.5 dB max.
 Isolation: 20 dB min.
 VSWR: 1.20 max.
 Forward Power: 30 W
 Reserve Power: 5 W


Revisions			
Rev	Description	Date	Approved:
A	Initial Release	2017.7.10	A. M

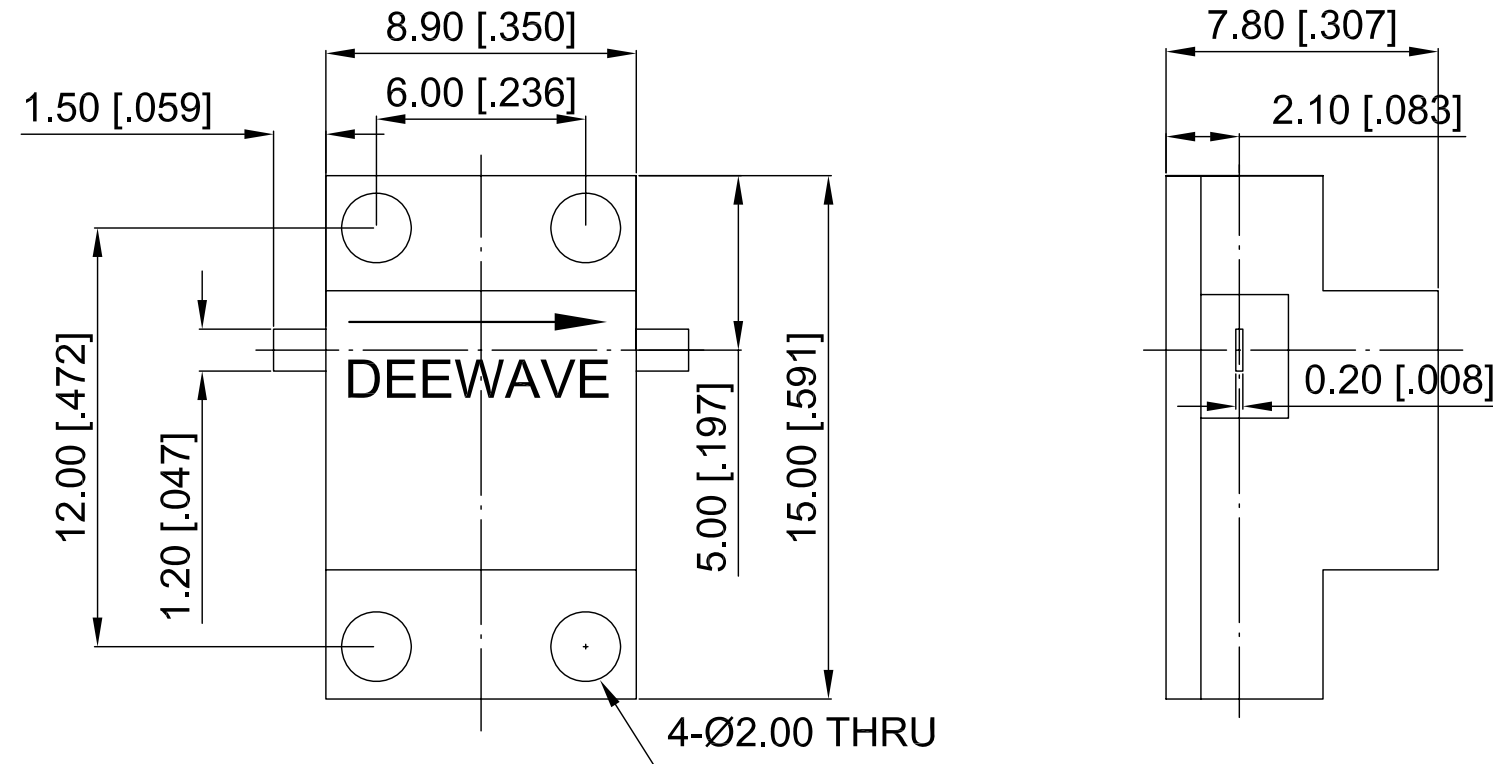


NOTES:
 1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
 2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

Drawn:	W. Y 2017.7.10
Checked:	T. L 2017.7.10
Approved:	A. M 2017.7.10
Unless Otherwise Specified Dimensions are in Millimeters, Dimensions in [] are in Inches for Customer Reference Only. Unless Otherwise Specified Tolerance are: .XX ±0.13 [.005"] .X ±0.20 [.008"] X ±0.50 [.019"] .X° ±1° X° ±2°	

Title:	Drop-in Isolator Freq 10-11 GHz
Part No:	

DEEWAVE 
www.deewave.com

View: 

Size:	Scale:	Sheet:	Rev:
A3	4:1	1/1	A