

**ELECTRICAL SPECIFICATIONS**

Frequency Range: 1280-1320 MHz

Insertion Loss: 0.3 dB max.


Isolation: 20 dB min.

VSWR: 1.20 max.

Reserve Power: 2 W

Direction: Clockwise

Revisions			
Rev	Description	Date	Approved:
A	Initial Release	2015.4.20	A. M

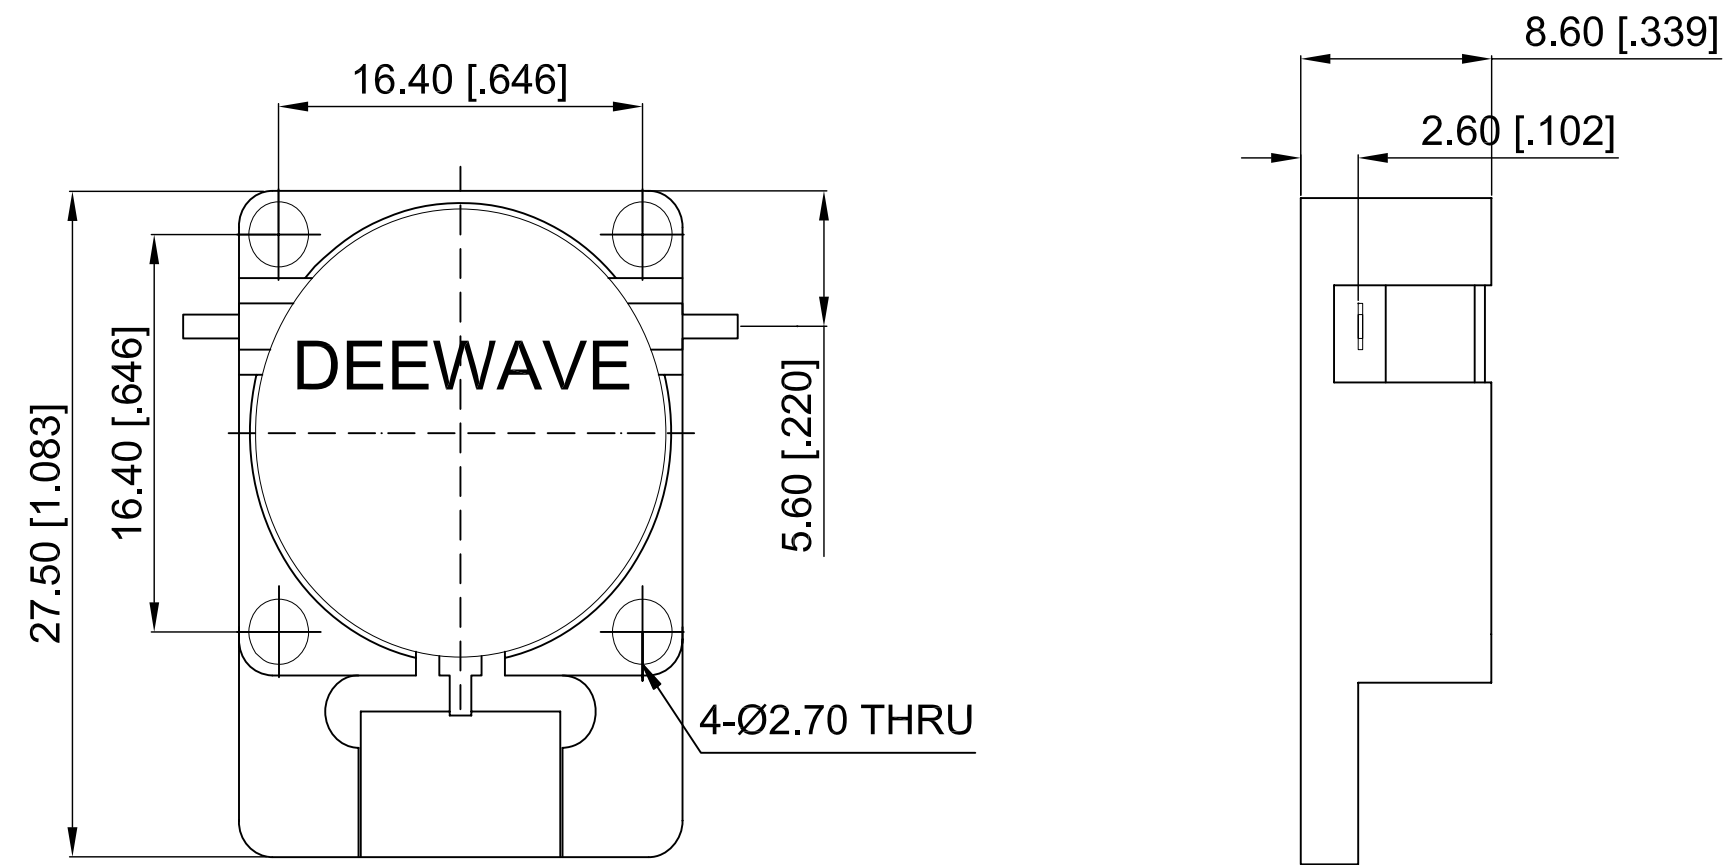

- NOTES:
1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
  2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

Drawn:	W. Y 2015.4.20
Checked:	T. L 2015.4.20
Approved:	A. M 2015.4.20
Unless Otherwise Specified Dimensions are in Millimeters, Dimensions in [ ] are in Inches for Customer Reference Only. Unless Otherwise Specified Tolerance are: .XX ±0.13 [.005"] .X ±0.20 [.008"] X ±0.50 [.019"] .X° ±1° X° ±2°	

Title:	<b>Drop-in Isolator Freq 1280-1320 MHz</b>
Part No:	<b>DDI128132</b>

**DEEWAVE**  
www.deewave.com

View:

Size:	Scale:	Sheet:	Rev:
A3	3:1	1/1	A