


ELECTRICAL SPECIFICATIONS
 Frequency Range: 1616-1621 MHz
 Insertion Loss: 0.3 dB max.
 Isolation: 23 dB min.
 VSWR: 1.20 max.
 Forward Power: 20 W
 Reverse Power: 10W
 Direction: Clockwise

Revisions			
Rev	Description	Date	Approved:
A	Initial Release	2016.8.5	A. M

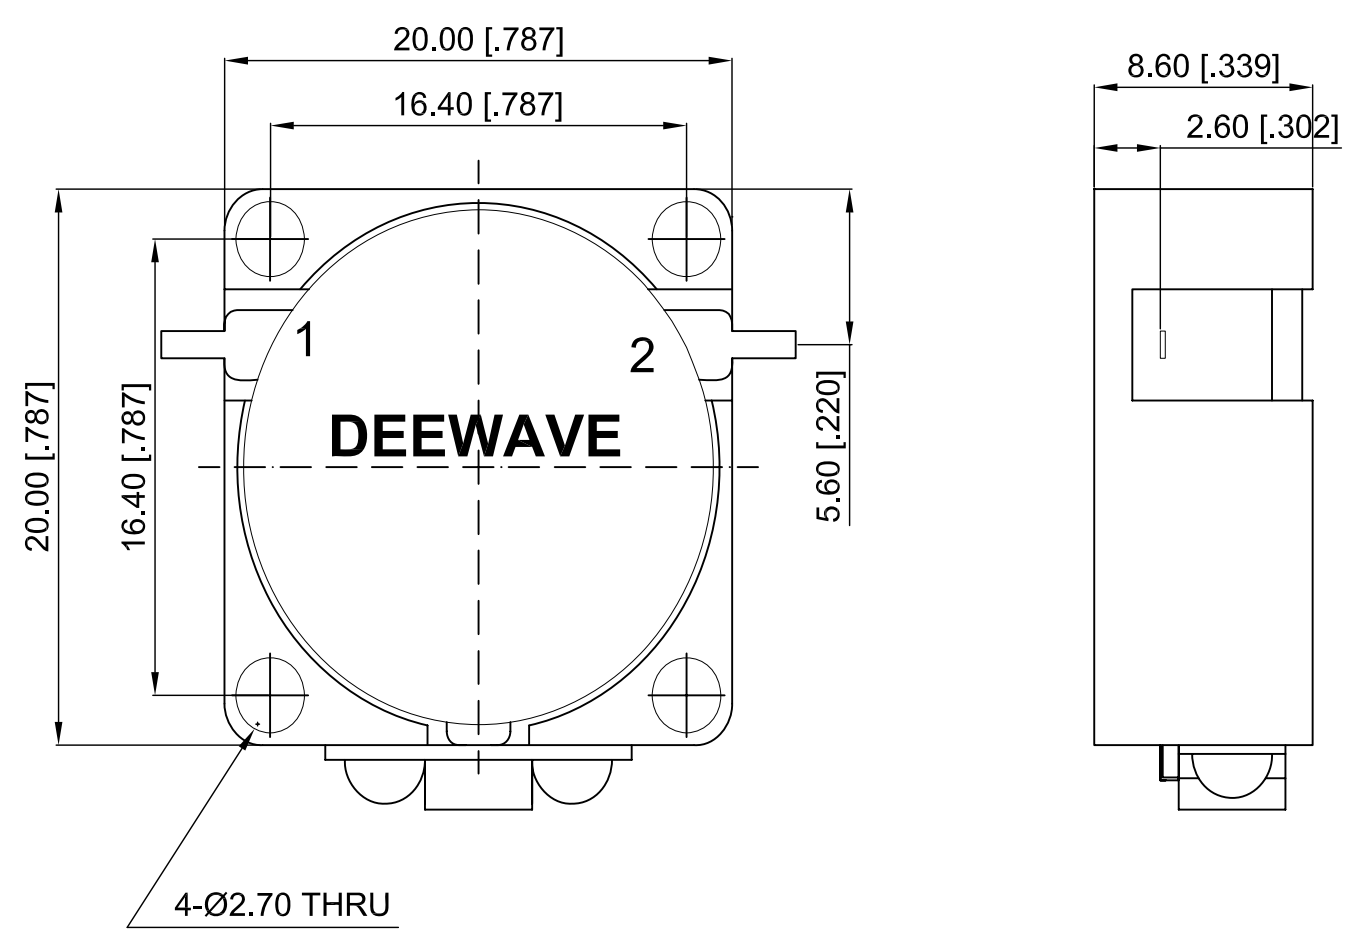

NOTES:
 1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
 2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

Drawn:	W. Y 2016.8.5
Checked:	T. L 2016.8.5
Approved:	A. M 2016.8.5
Unless Otherwise Specified Dimensions are in Millimeters, Dimensions in [] are in Inches for Customer Reference Only. Unless Otherwise Specified Tolerance are: .XX ±0.13 [.005"] .X ±0.20 [.008"] X ±0.50 [.019"] .X° ±1° X° ±2°	

Title:	Drop-in Isolator Freq 1616-1621 MHz
Part No:	DDI161162

DEEWAVE
www.deewave.com

View:

Size:	Scale:	Sheet:	Rev:
A3	3:1	1/1	A