

ELECTRICAL SPECIFICATIONS

Frequency Range: 17.7-20.2 GHz

Impedance: 50 Ohm

Insertion Loss: 0.5 dB max.

Isolation: 20 dB min.


VSWR: 1.20 max.

Forward Power: 10 W

Reserve Power: 2 W

Direction: Clockwise

| Revisions | | | |
|-----------|-----------------|-----------|-----------|
| Rev | Description | Date | Approved: |
| A | Initial Release | 2019.5.31 | A. M |

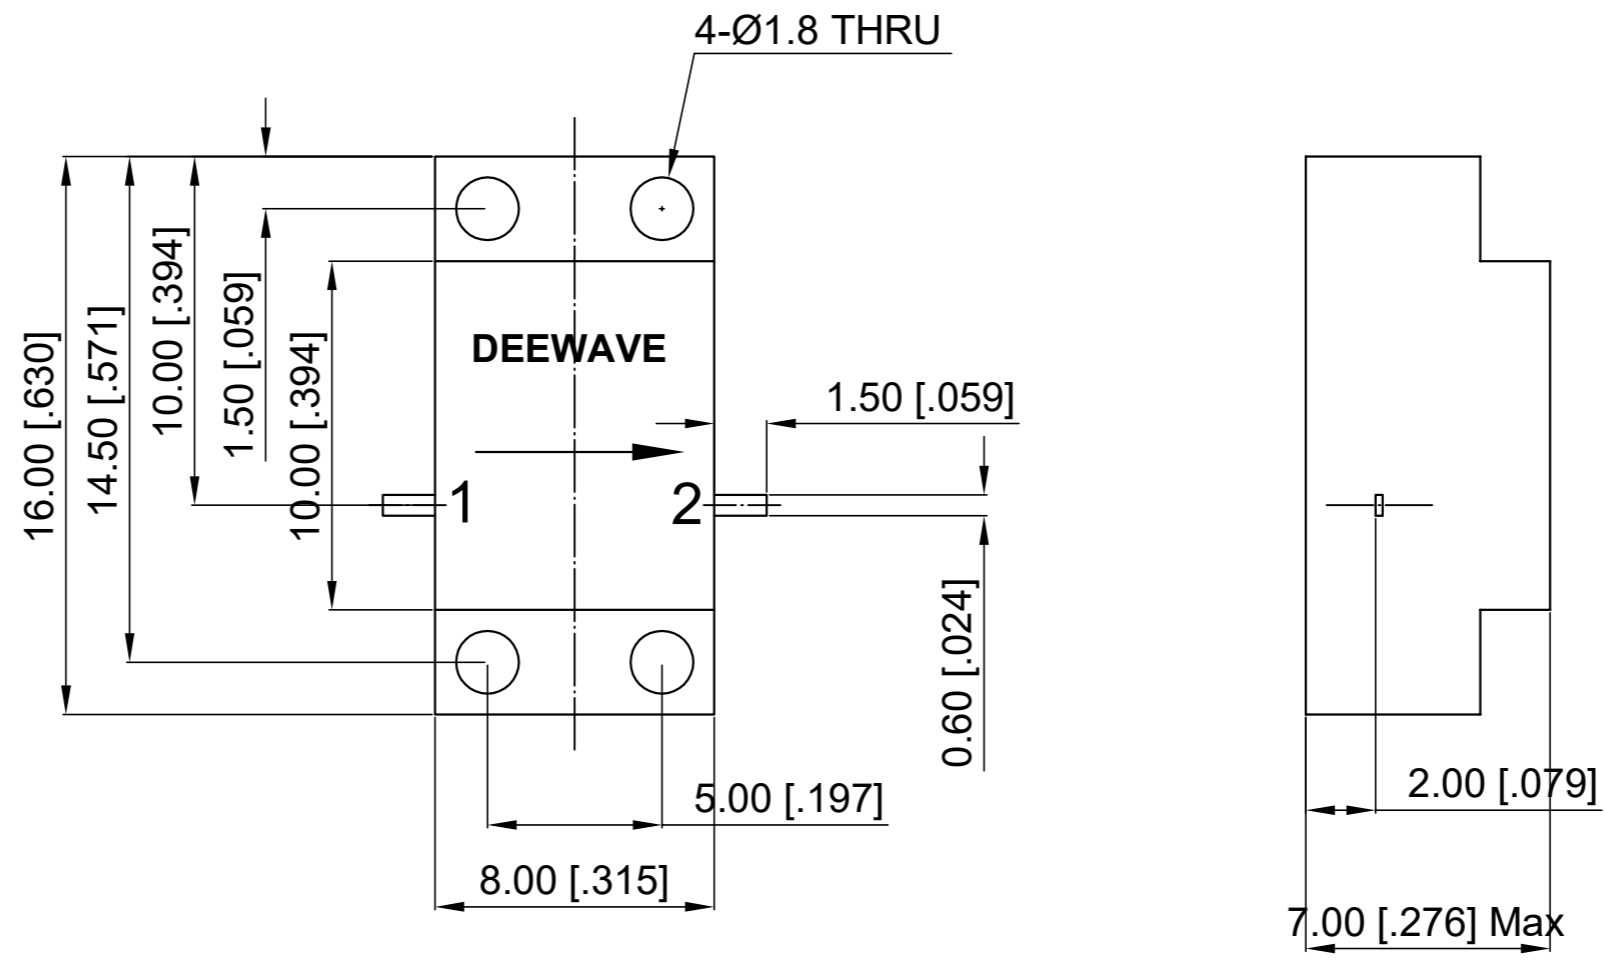

- NOTES:
1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
 2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

| | |
|--|----------------|
| Drawn: | W. Y 2019.5.31 |
| Checked: | T. L 2019.5.31 |
| Approved: | A. M 2019.5.31 |
| Unless Otherwise Specified Dimensions are in Millimeters, Dimensions in [] are in Inches for Customer Reference Only. Unless Otherwise Specified Tolerance are: .XX ±0.13 [.005"] .X ±0.20 [.008"] X ±0.50 [.019"] .X° ±1° X° ±2° | |

| | |
|----------|--|
| Title: | Drop-in Isolator Freq 17.7-20.2 GHz |
| Part No: | DDI17702020 |

DEEWAVE
www.deewave.com

View:

| | | | |
|-------|--------|--------|------|
| Size: | Scale: | Sheet: | Rev: |
| A3 | 4:1 | 1/1 | A |