


### Performance Features


- Nominal Impedance: 50Ω
- Frequency Range: DC-27 GHz
- Durability: 500 Cycles
- Operating Temperature: -55°C~+165°C

### Materials/Finishes


- Housing: Type 303 Stainless Steel - Polished & Passivated
- Center Contact: Beryllium Copper Plated Gold
- Insulators: PEI&PTFE

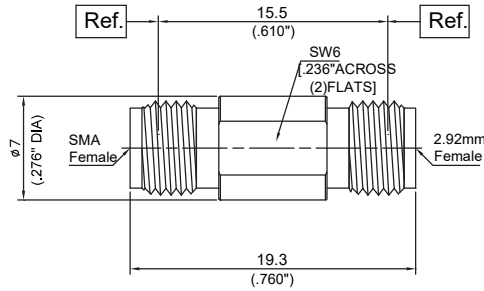


P/N	DPA23025001
Descr.	2.92mm F to SMA F
Freq.	DC-27GHz
VSWR	1.15:1(Max)

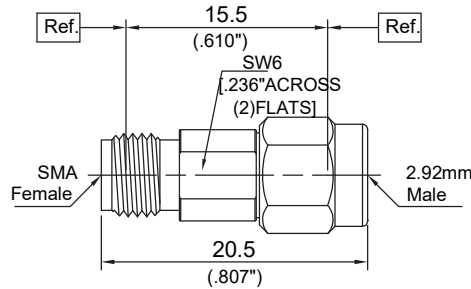

P/N	DPA23125002
Descr.	2.92mm M to SMA F
Freq.	DC-27GHz
VSWR	1.15:1(Max)

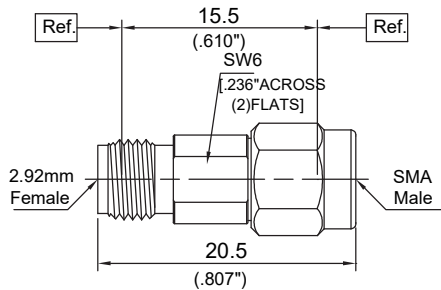

P/N	DPA23025103
Descr.	2.92mm F to SMA M
Freq.	DC-27GHz
VSWR	1.15:1(Max)

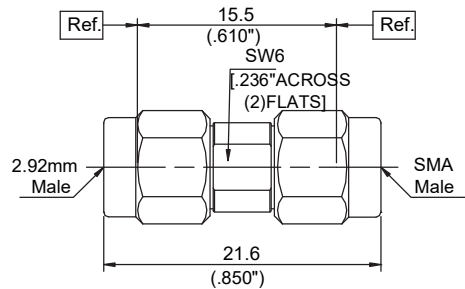

P/N	DPA23125104
Descr.	2.92mm M to SMA M
Freq.	DC-27GHz
VSWR	1.15:1(Max)