

Performance Features

Nominal Impedance: 50Ω

Frequency Range: DC-40 GHz

Durability: 500 Cycles



Operating Temperature: -55°C~+165°C

Materials/Finishes



Housing: Type 303 Stainless Steel - Polished & Passivated

Center Contact: Beryllium Copper Plated Gold



Insulators: PEI&PTFE

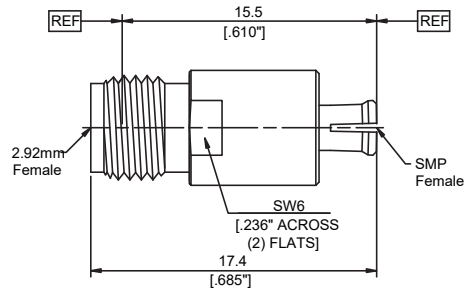



P/N	DPA23033001
Descr.	2.92mm Female to SMP Female
Freq.	DC-40GHz
VSWR	1.20:1(Max)

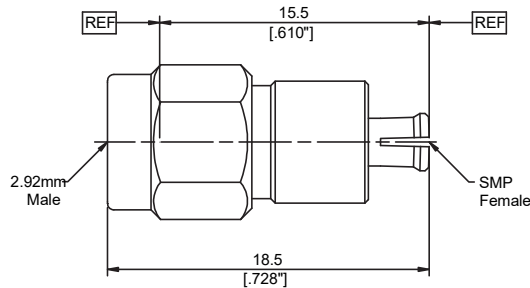



P/N	DPA23133002
Descr.	2.92mm Male to SMP Female
Freq.	DC-40GHz
VSWR	1.20:1(Max)

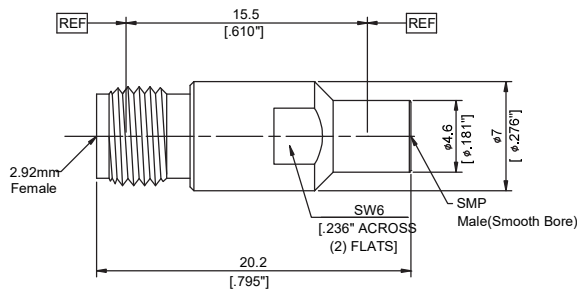

P/N	DPA23033103
Descr.	2.92mm Female to SMP Male Smooth Bore
Freq.	DC-40GHz
VSWR	1.20:1(Max)

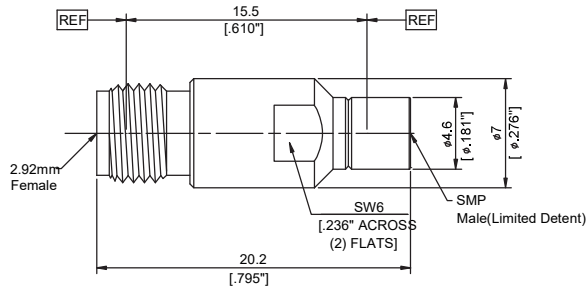

P/N	DPA23033104
Descr.	2.92mm Female to SMP Male Limited Detent
Freq.	DC-40GHz
VSWR	1.20:1(Max)

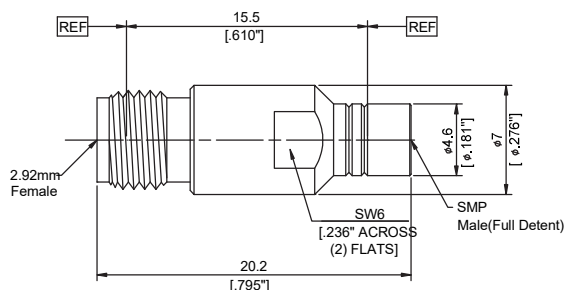

P/N	DPA23033105
Descr.	2.92mm Female to SMP Male Full Detent
Freq.	DC-40GHz
VSWR	1.20:1(Max)

		<table border="1"> <tbody> <tr> <td>P/N</td> <td>DPA23133106</td> </tr> <tr> <td>Descr.</td> <td>2.92mm Male to SMP Male Smooth Broe</td> </tr> <tr> <td>Freq.</td> <td>DC-40GHz</td> </tr> <tr> <td>VSWR</td> <td>1.20:1(Max)</td> </tr> </tbody> </table>	P/N	DPA23133106	Descr.	2.92mm Male to SMP Male Smooth Broe	Freq.	DC-40GHz	VSWR	1.20:1(Max)
P/N	DPA23133106									
Descr.	2.92mm Male to SMP Male Smooth Broe									
Freq.	DC-40GHz									
VSWR	1.20:1(Max)									
		<table border="1"> <tbody> <tr> <td>P/N</td> <td>DPA23133107</td> </tr> <tr> <td>Descr.</td> <td>2.92mm Male to SMP Male Limited Detent</td> </tr> <tr> <td>Freq.</td> <td>DC-40GHz</td> </tr> <tr> <td>VSWR</td> <td>1.20:1(Max)</td> </tr> </tbody> </table>	P/N	DPA23133107	Descr.	2.92mm Male to SMP Male Limited Detent	Freq.	DC-40GHz	VSWR	1.20:1(Max)
P/N	DPA23133107									
Descr.	2.92mm Male to SMP Male Limited Detent									
Freq.	DC-40GHz									
VSWR	1.20:1(Max)									
		<table border="1"> <tbody> <tr> <td>P/N</td> <td>DPA23133108</td> </tr> <tr> <td>Descr.</td> <td>2.92mm Male to SMP Male Full Detent</td> </tr> <tr> <td>Freq.</td> <td>DC-40GHz</td> </tr> <tr> <td>VSWR</td> <td>1.20:1(Max)</td> </tr> </tbody> </table>	P/N	DPA23133108	Descr.	2.92mm Male to SMP Male Full Detent	Freq.	DC-40GHz	VSWR	1.20:1(Max)
P/N	DPA23133108									
Descr.	2.92mm Male to SMP Male Full Detent									
Freq.	DC-40GHz									
VSWR	1.20:1(Max)									