

Performance Features

Nominal Impedance: 50Ω

Frequency Range: DC-33 GHz

Durability: 500 Cycles


Operating Temperature: -55°C~+165°C

Materials/Finishes


Housing: Type 303 Stainless Steel - Polished & Passivated

Center Contact: Beryllium Copper Plated Gold


Insulators: PEI

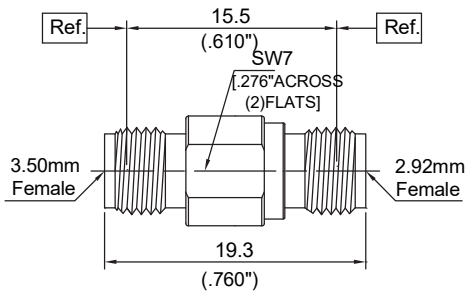


P/N	DPA24023001
Descr.	3.5mm F to 2.92mm F
Freq.	DC-33GHz
VSWR	1.15:1(Max)

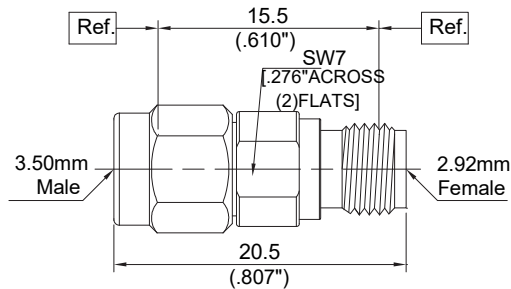


P/N	DPA24123002
Descr.	3.5mm M to 2.92mm F
Freq.	DC-33GHz
VSWR	1.15:1(Max)

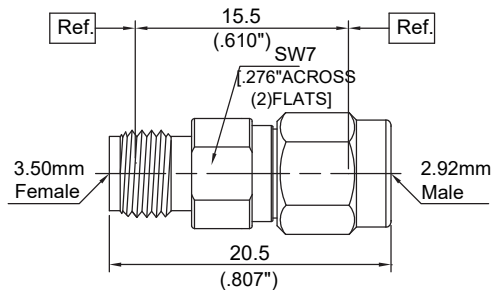


P/N	DPA24023103
Descr.	3.5mm F to 2.92mm M
Freq.	DC-33GHz
VSWR	1.15:1(Max)

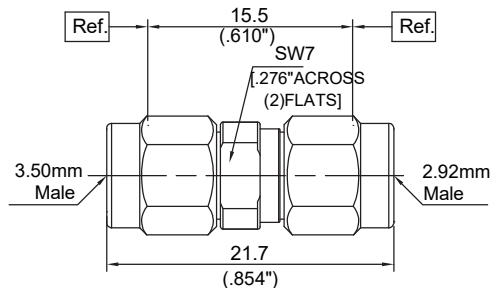


P/N	DPA24123104
Descr.	3.5mm M to 2.92mm M
Freq.	DC-33GHz
VSWR	1.15:1(Max)

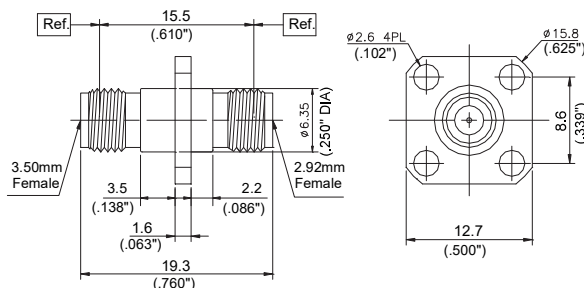


P/N	DPA24023005
Descr.	3.5mm F to 2.92mm F, Flange
Freq.	DC-33GHz
VSWR	1.15:1(Max)





P/N	DPA24023006
Descr.	3.5mm F RA to 2.92mm F
Freq.	DC-33GHz
VSWR	1.25:1(Max)



P/N	DPA24123007
Descr.	3.5mm M RA to 2.92mm F
Freq.	DC-33GHz
VSWR	1.25:1(Max)



P/N	DPA24023108
Descr.	3.5mm F RA to 2.92mm M
Freq.	DC-33GHz
VSWR	1.25:1(Max)



P/N	DPA24123109
Descr.	3.5mm M RA to 2.92mm M
Freq.	DC-33GHz
VSWR	1.25:1(Max)