


### Performance Features


Nominal Impedance: 50Ω  
 Frequency Range: DC-27 GHz  
 Durability: 500 Cycles  
 Operating Temperature: -55°C~+165°C

### Materials/Finishes


Housing: Type 303 Stainless Steel - Polished & Passivated  
 Center Contact: Beryllium Copper Plated Gold  
 Insulators: PEI&PTFE

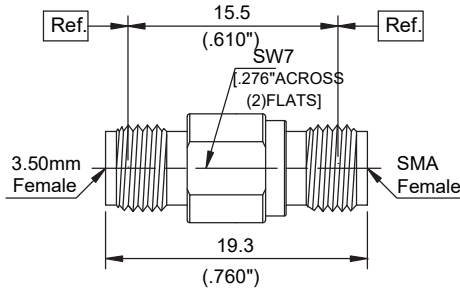


P/N	DPA24025001
Descr.	3.5mm F to SMA F
Freq.	DC-27GHz
VSWR	1.15:1(Max)

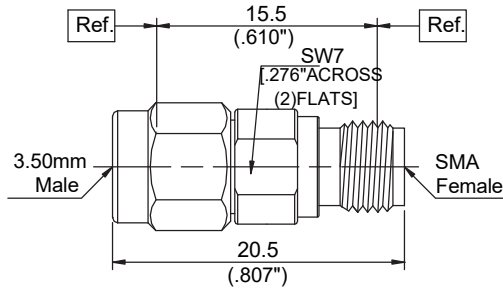

P/N	DPA24125002
Descr.	3.5mm M to SMA F
Freq.	DC-27GHz
VSWR	1.15:1(Max)

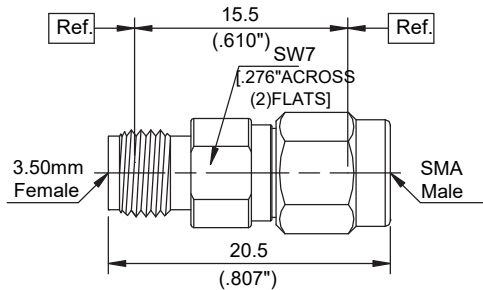

P/N	DPA24025103
Descr.	3.5mm F to SMA M
Freq.	DC-27GHz
VSWR	1.15:1(Max)

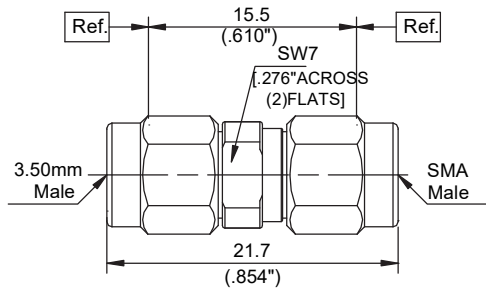

P/N	DPA24125104
Descr.	3.5mm M to SMA M
Freq.	DC-27GHz
VSWR	1.15:1(Max)