

## Performance Features

Nominal Impedance: 50Ω

Frequency Range: DC-18 GHz

Durability: 500 Cycles


Operating Temperature: -55°C~+165°C

## Materials/Finishes



Housing: Type 303 Stainless Steel - Polished & Passivated

Center Contact: Beryllium Copper Plated Gold


Insulators: PEI

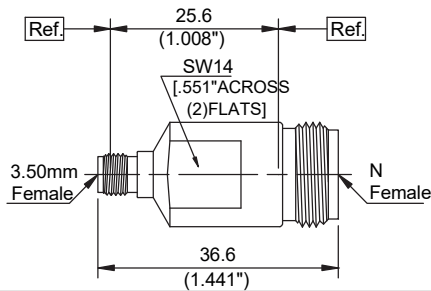


P/N	DPA28024001
Descr.	N Female to 3.5mm Female
Freq.	DC-18GHz
VSWR	1.15:1(Max)

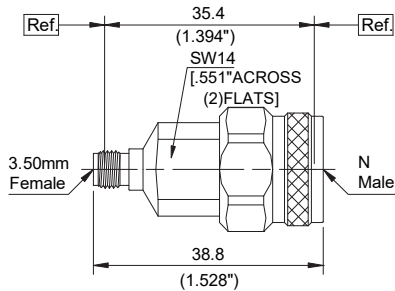

P/N	DPA28124002
Descr.	N Male to 3.5mm Female
Freq.	DC-18GHz
VSWR	1.15:1(Max)

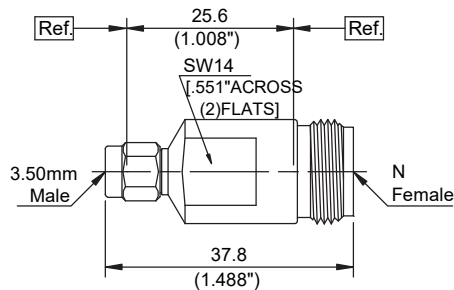

P/N	DPA28024103
Descr.	N Female to 3.5mm Male
Freq.	DC-18GHz
VSWR	1.15:1(Max)

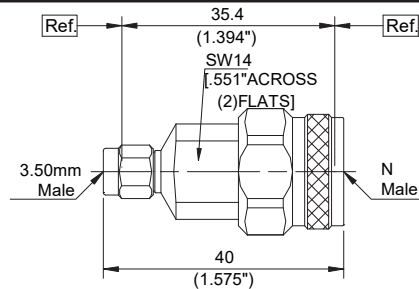

P/N	DPA28124104
Descr.	N Male to 3.5mm Male
Freq.	DC-18GHz
VSWR	1.15:1(Max)