

Performance Features

Nominal Impedance: 50Ω

Frequency Range: DC-18 GHz

Durability: 500 Cycles


Operating Temperature: -55°C~+165°C

Materials/Finishes


Housing: Type 303 Stainless Steel - Polished & Passivated

Center Contact: Beryllium Copper Plated Gold


Insulators: PEI&PTFE

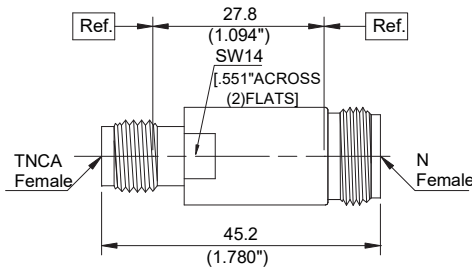


P/N	DPA28027001
Descr.	N Female to TNCA Female
Freq.	DC-18GHz
VSWR	1.25:1(Max)

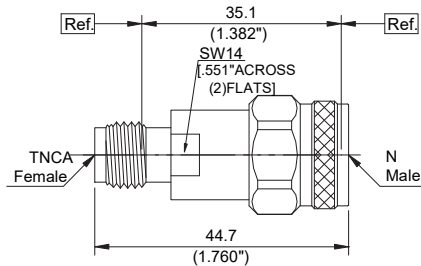


P/N	DPA28127002
Descr.	N Male to TNCA Female
Freq.	DC-18GHz
VSWR	1.25:1(Max)

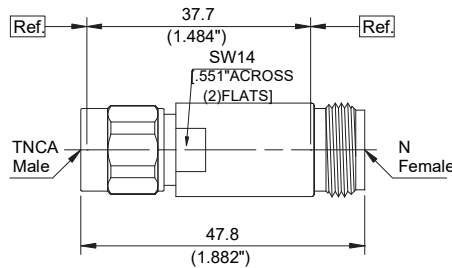

P/N	DPA28027103
Descr.	N Female to TNCA Male
Freq.	DC-18GHz
VSWR	1.25:1(Max)

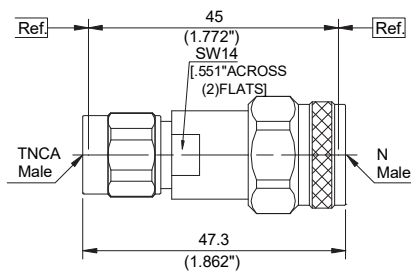

P/N	DPA28127104
Descr.	N Male to TNCA Male
Freq.	DC-18GHz
VSWR	1.25:1(Max)

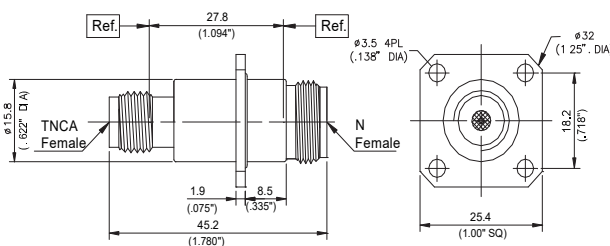

P/N	DPA28027005
Descr.	N Male to TNCA Male, Flange
Freq.	DC-18GHz
VSWR	1.25:1(Max)