

## Performance Features

Nominal Impedance: 50Ω

Frequency Range: DC-18 GHz

Durability: 500 Cycles


Operating Temperature: -55°C~+165°C

## Materials/Finishes


Housing: Type 303 Stainless Steel - Polished & Passivated

Center Contact: Beryllium Copper Plated Gold


Insulators: PEI&PTFE

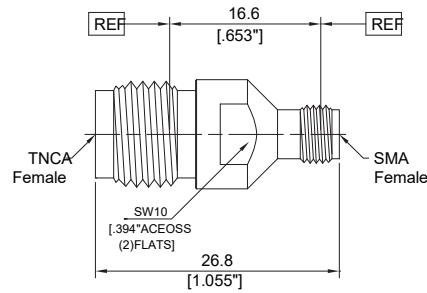


P/N	DPA27025001
Descr.	TNCA F to SMA F
Freq.	DC-18GHz
VSWR	1.25:1(Max)

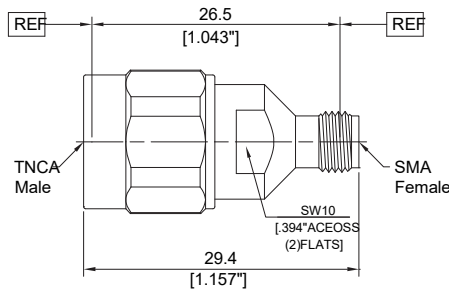


P/N	DPA27125002
Descr.	TNCA M to SMA F
Freq.	DC-18GHz
VSWR	1.25:1(Max)

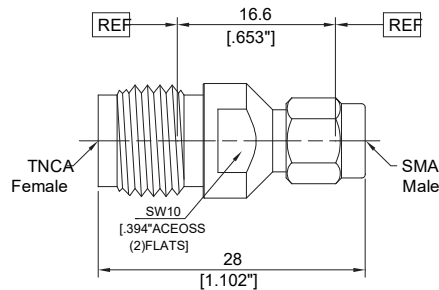

P/N	DPA27025103
Descr.	TNCA F to SMA M
Freq.	DC-18GHz
VSWR	1.25:1(Max)

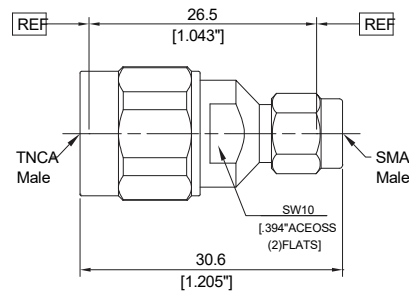

P/N	DPA27125104
Descr.	TNCA M to SMA M
Freq.	DC-18GHz
VSWR	1.25:1(Max)

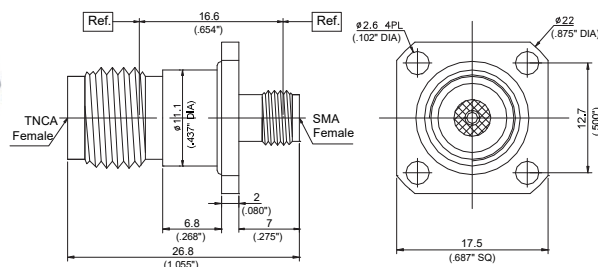

P/N	DPA27025005
Descr.	TNCA F to SMA F, Flange
Freq.	DC-18GHz
VSWR	1.25:1(Max)