

Performance Features

Nominal Impedance: 50Ω

Frequency Range: DC-18 GHz

Durability: 500 Cycles


Operating Temperature: -55°C~+165°C

Materials/Finishes


Housing: Type 303 Stainless Steel - Polished & Passivated

Center Contact: Beryllium Copper Plated Gold


Insulators: PEI&PTFE

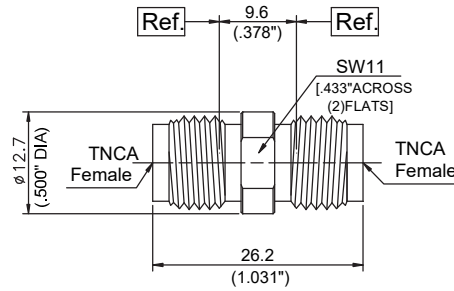


P/N	DPA27027001
Descr.	TNCA Female to TNCA Female
Freq.	DC-18GHz
VSWR	1.25:1(Max)

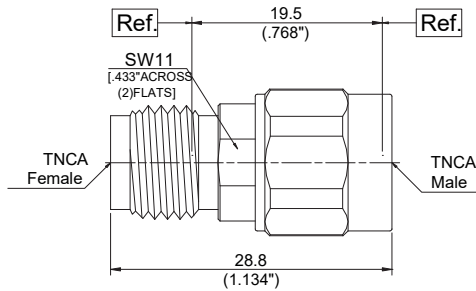


P/N	DPA27027102
Descr.	TNCA Male to TNCA Female
Freq.	DC-18GHz
VSWR	1.25:1(Max)

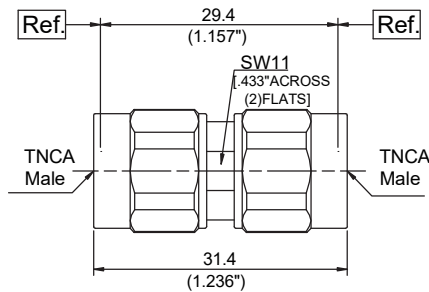

P/N	DPA27127103
Descr.	TNCA Male to TNCA Male
Freq.	DC-18GHz
VSWR	1.25:1(Max)

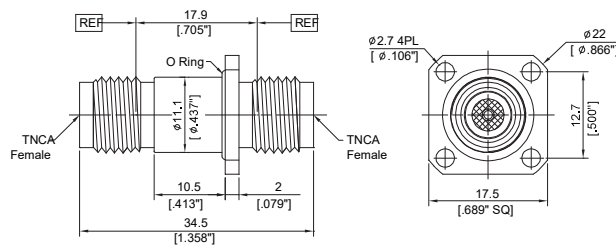

P/N	DPA27027004
Descr.	TNCA F to TNCA F, Flange
Freq.	DC-18GHz
VSWR	1.25:1(Max)

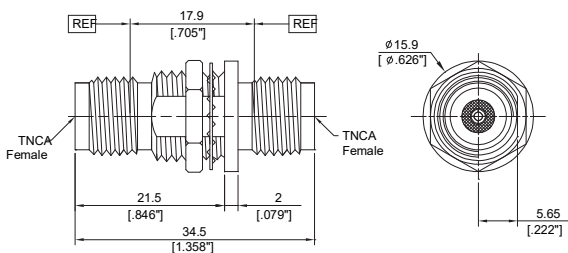

P/N	DPA27027005
Descr.	TNCA F to TNCA F, Bulkhead
Freq.	DC-18GHz
VSWR	1.25:1(Max)