

Performance Features

Nominal Impedance: 50Ω

Durability: 500 Cycles


Operating Temperature: -55°C~+125°C

Materials/Finishes

Housing: Type 303 Stainless Steel - Polished & Passivated

Center Contact: Beryllium Copper Plated Gold

Insulators: PEI&PTFE

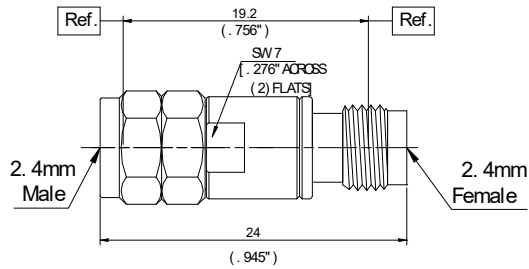

P/N	DFA2210-40-0.5-3
Descr.	2.4mm M to F Attenuator, 3dB
Freq.	DC-40GHz
VSWR	1.40:1(Max)
Attenu.	3dB
Attenu. Accuracy:	±1.5dB
Power	0.5W

P/N	DFA2210-40-0.5-6
Descr.	2.4mm M to F Attenuator, 6dB
Freq.	DC-40GHz
VSWR	1.40:1(Max)
Attenu.	6dB
Attenu. Accuracy:	±1.5dB
Power	0.5W

P/N	DFA2210-40-0.5-10
Descr.	2.4mm M to F Attenuator, 10dB
Freq.	DC-40GHz
VSWR	1.40:1(Max)
Attenu.	10dB
Attenu. Accuracy:	±1.5dB
Power	0.5W

P/N	DFA2210-40-0.5-20
Descr.	2.4mm M to F Attenuator, 20dB
Freq.	DC-40GHz
VSWR	1.40:1(Max)
Attenu.	20dB
Attenu. Accuracy:	±2dB
Power	0.5W

P/N	DFA2210-40-0.5-30
Descr.	2.4mm M to F Attenuator, 30dB
Freq.	DC-40GHz
VSWR	1.40:1(Max)
Attenu.	30dB
Attenu. Accuracy:	±2dB
Power	0.5W