

Performance Features

Nominal Impedance: 50Ω

Durability: 500 Cycles


Operating Temperature: -55°C~+125°C

Materials/Finishes

Housing: Type 303 Stainless Steel - Polished & Passivated

Center Contact: Beryllium Copper Plated Gold

Insulators: PEI&PTFE

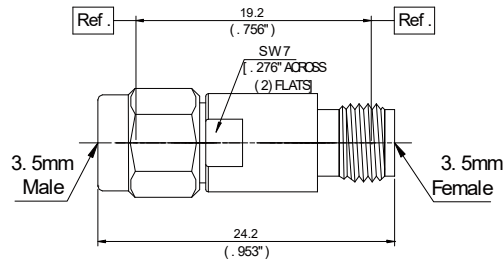

P/N	DFA2410-33-1-3
Descr.	3.5mm M to F Attenuator, 3dB
Freq.	DC-33GHz
VSWR	1.30:1(Max)
Attenu.	3dB
Attenu. Accuracy:	±0.8dB
Power	1W

P/N	DFA2410-33-1-6
Descr.	3.5mm M to F Attenuator, 6dB
Freq.	DC-33GHz
VSWR	1.30:1(Max)
Attenu.	6dB
Attenu. Accuracy:	±0.8dB
Power	1W

P/N	DFA2410-33-1-10
Descr.	3.5mm M to F Attenuator, 10dB
Freq.	DC-33GHz
VSWR	1.30:1(Max)
Attenu.	10dB
Attenu. Accuracy:	±1dB
Power	1W

P/N	DFA2410-33-1-20
Descr.	3.5mm M to F Attenuator, 20dB
Freq.	DC-33GHz
VSWR	1.30:1(Max)
Attenu.	20dB
Attenu. Accuracy:	±1dB
Power	1W

P/N	DFA2410-33-1-30
Descr.	3.5mm M to F Attenuator, 30dB
Freq.	DC-33GHz
VSWR	1.30:1(Max)
Attenu.	30dB
Attenu. Accuracy:	±1dB
Power	1W