

### Performance Features

Nominal Impedance: 50Ω

Durability: 500 Cycles


Operating Temperature: -55°C~+125°C

### Materials/Finishes

Housing: Type 303 Stainless Steel - Polished & Passivated

Center Contact: Beryllium Copper Plated Gold

Insulators: PEI&PTFE

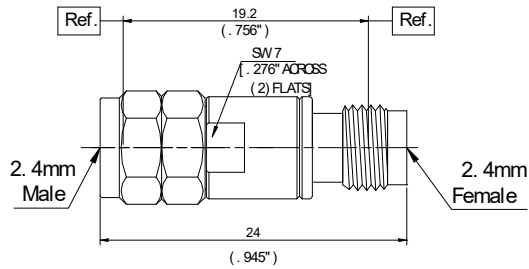

P/N	DFA2210-40-0.5-3
Descr.	2.4mm M to F Attenuator, 3dB
Freq.	DC-40GHz
VSWR	1.40:1(Max)
Attenu.	3dB
Attenu. Accuracy:	±1.5dB
Power	0.5W

P/N	DFA2210-40-0.5-6
Descr.	2.4mm M to F Attenuator, 6dB
Freq.	DC-40GHz
VSWR	1.40:1(Max)
Attenu.	6dB
Attenu. Accuracy:	±1.5dB
Power	0.5W

P/N	DFA2210-40-0.5-10
Descr.	2.4mm M to F Attenuator, 10dB
Freq.	DC-40GHz
VSWR	1.40:1(Max)
Attenu.	10dB
Attenu. Accuracy:	±1.5dB
Power	0.5W

P/N	DFA2210-40-0.5-20
Descr.	2.4mm M to F Attenuator, 20dB
Freq.	DC-40GHz
VSWR	1.40:1(Max)
Attenu.	20dB
Attenu. Accuracy:	±2dB
Power	0.5W

P/N	DFA2210-40-0.5-30
Descr.	2.4mm M to F Attenuator, 30dB
Freq.	DC-40GHz
VSWR	1.40:1(Max)
Attenu.	30dB
Attenu. Accuracy:	±2dB
Power	0.5W

### Performance Features

Nominal Impedance: 50Ω

Durability: 500 Cycles


Operating Temperature: -55°C~+125°C

### Materials/Finishes

Housing: Type 303 Stainless Steel - Polished & Passivated

Center Contact: Beryllium Copper Plated Gold

Insulators: PEI&PTFE

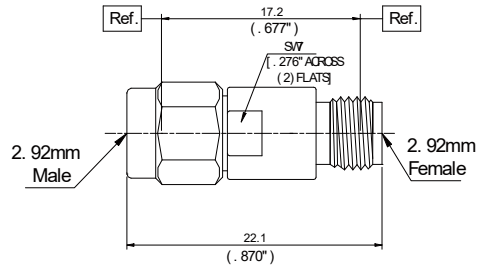

P/N	DFA2310-40-1-3
Descr.	2.92mm M to F Attenuator, 3dB
Freq.	DC-40GHz
VSWR	1.35:1(Max)
Attenu.	3dB
Attenu. Accuracy:	±0.8dB
Power	1W

P/N	DFA2310-40-1-6
Descr.	2.92mm M to F Attenuator, 6dB
Freq.	DC-40GHz
VSWR	1.35:1(Max)
Attenu.	6dB
Attenu. Accuracy:	±0.8dB
Power	1W

P/N	DFA2310-40-1-10
Descr.	2.92mm M to F Attenuator, 10dB
Freq.	DC-40GHz
VSWR	1.35:1(Max)
Attenu.	10dB
Attenu. Accuracy:	±1dB
Power	1W

P/N	DFA2310-40-1-20
Descr.	2.92mm M to F Attenuator, 20dB
Freq.	DC-40GHz
VSWR	1.35:1(Max)
Attenu.	20dB
Attenu. Accuracy:	±1dB
Power	1W

P/N	DFA2310-40-1-30
Descr.	2.92mm M to F Attenuator, 30dB
Freq.	DC-40GHz
VSWR	1.35:1(Max)
Attenu.	30dB
Attenu. Accuracy:	±1dB
Power	1W

### Performance Features

Nominal Impedance: 50Ω

Durability: 500 Cycles


Operating Temperature: -55°C~+125°C

### Materials/Finishes

Housing: Type 303 Stainless Steel - Polished & Passivated

Center Contact: Beryllium Copper Plated Gold

Insulators: PEI&PTFE

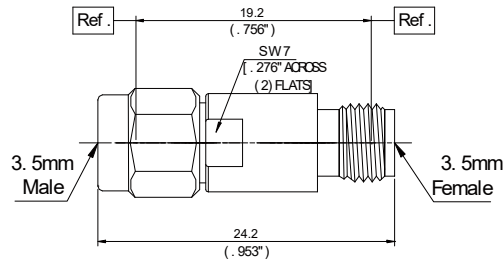

P/N	DFA2410-33-1-3
Descr.	3.5mm M to F Attenuator, 3dB
Freq.	DC-33GHz
VSWR	1.30:1(Max)
Attenu.	3dB
Attenu. Accuracy:	±0.8dB
Power	1W

P/N	DFA2410-33-1-6
Descr.	3.5mm M to F Attenuator, 6dB
Freq.	DC-33GHz
VSWR	1.30:1(Max)
Attenu.	6dB
Attenu. Accuracy:	±0.8dB
Power	1W

P/N	DFA2410-33-1-10
Descr.	3.5mm M to F Attenuator, 10dB
Freq.	DC-33GHz
VSWR	1.30:1(Max)
Attenu.	10dB
Attenu. Accuracy:	±1dB
Power	1W

P/N	DFA2410-33-1-20
Descr.	3.5mm M to F Attenuator, 20dB
Freq.	DC-33GHz
VSWR	1.30:1(Max)
Attenu.	20dB
Attenu. Accuracy:	±1dB
Power	1W

P/N	DFA2410-33-1-30
Descr.	3.5mm M to F Attenuator, 30dB
Freq.	DC-33GHz
VSWR	1.30:1(Max)
Attenu.	30dB
Attenu. Accuracy:	±1dB
Power	1W

## Performance Features

Nominal Impedance: 50Ω

Durability: 500 Cycles


Operating Temperature: -55°C~+125°C

## Materials/Finishes

Housing: Type 303 Stainless Steel - Polished & Passivated

Center Contact: Beryllium Copper Plated Gold

Insulators: PEI&PTFE

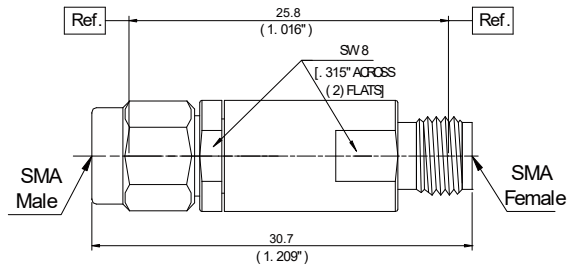

P/N	DFA2510-27-2-3
Descr.	SMA M to F Attenuator, 3dB
Freq.	DC-27GHz
VSWR	1.30:1(Max)
Attenu.	3dB
Attenu. Accuracy:	±0.6dB
Power	2W

P/N	DFA2510-27-2-6
Descr.	SMA M to F Attenuator, 6dB
Freq.	DC-27GHz
VSWR	1.30:1(Max)
Attenu.	6dB
Attenu. Accuracy:	±0.6dB
Power	2W

P/N	DFA2510-27-2-10
Descr.	SMA M to F Attenuator, 10dB
Freq.	DC-27GHz
VSWR	1.30:1(Max)
Attenu.	10dB
Attenu. Accuracy:	±0.8dB
Power	2W

P/N	DFA2510-27-2-20
Descr.	SMA M to F Attenuator, 20dB
Freq.	DC-27GHz
VSWR	1.30:1(Max)
Attenu.	20dB
Attenu. Accuracy:	±0.8dB
Power	2W

P/N	DFA2510-27-2-30
Descr.	SMA M to F Attenuator, 30dB
Freq.	DC-27GHz
VSWR	1.30:1(Max)
Attenu.	30dB
Attenu. Accuracy:	±0.8dB
Power	2W