

Revisions			
Rev	Description	Date	Approved:
A	Initial Release	2021.3.18	A. M

ELECTRICAL PERFORMANCE

Frequency Range: 17.6-22 GHz


VSWR: 1.10 max.

Port 1: WR51 (UBR180)

Port 2: WR42 (UBR220)

MATERIAL

Body: Brass plated Ag, Painted Gray

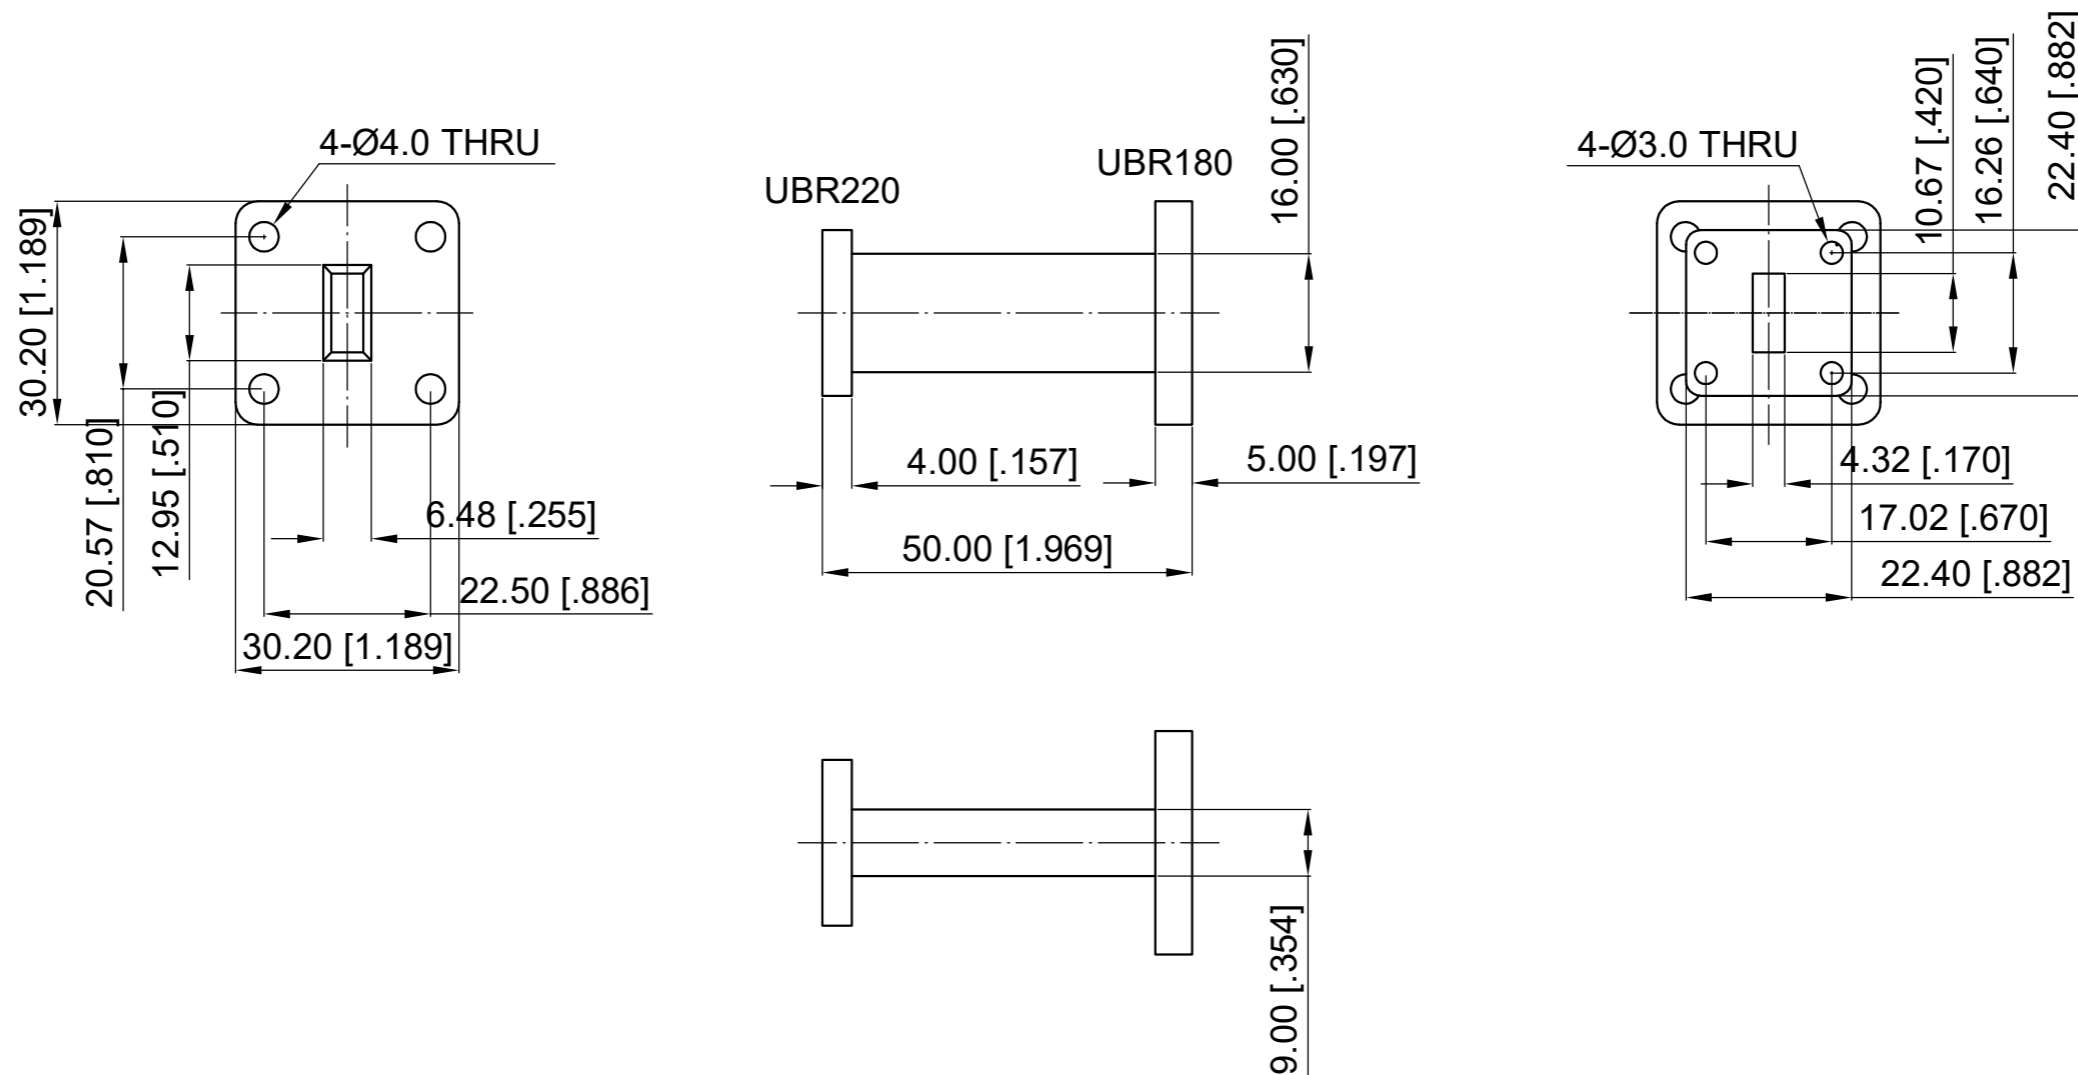

NOTES:

- 1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
- 2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

Drawn:	W. Y 2021.3.18
Checked:	T. L 2021.3.18
Approved:	A. M 2021.3.18
Unless Otherwise Specified Dimensions are in Millimeters, Dimensions in [] are in Inches for Customer Reference Only. Unless Otherwise Specified Tolerance are: .XX ±0.13 [.005"] .X ±0.20 [.008"] X ±0.50 [.019"] .X° ±1° X° ±2°	

Title:	WR51 to WR42 Waveguide Transition, 50mm Length
Part No:	DWT51-42-50

DEEWAVE
www.deewave.com

View:

Size: A3	Scale: 1:1	Sheet: 1/1	Rev: A
----------	------------	------------	--------