

Revisions			
Rev	Description	Date	Approved:
A	Initial Release	2015.4.14	A. M

ELECTRICAL SPECIFICATIONS


Frequency Range: 10-15 GHz

VSWR: 1.25 max.

MATERIAL

Waveguide Body: Aluminum, Oxidized, Paint Gray

SMA Body: Brass Plated Gold

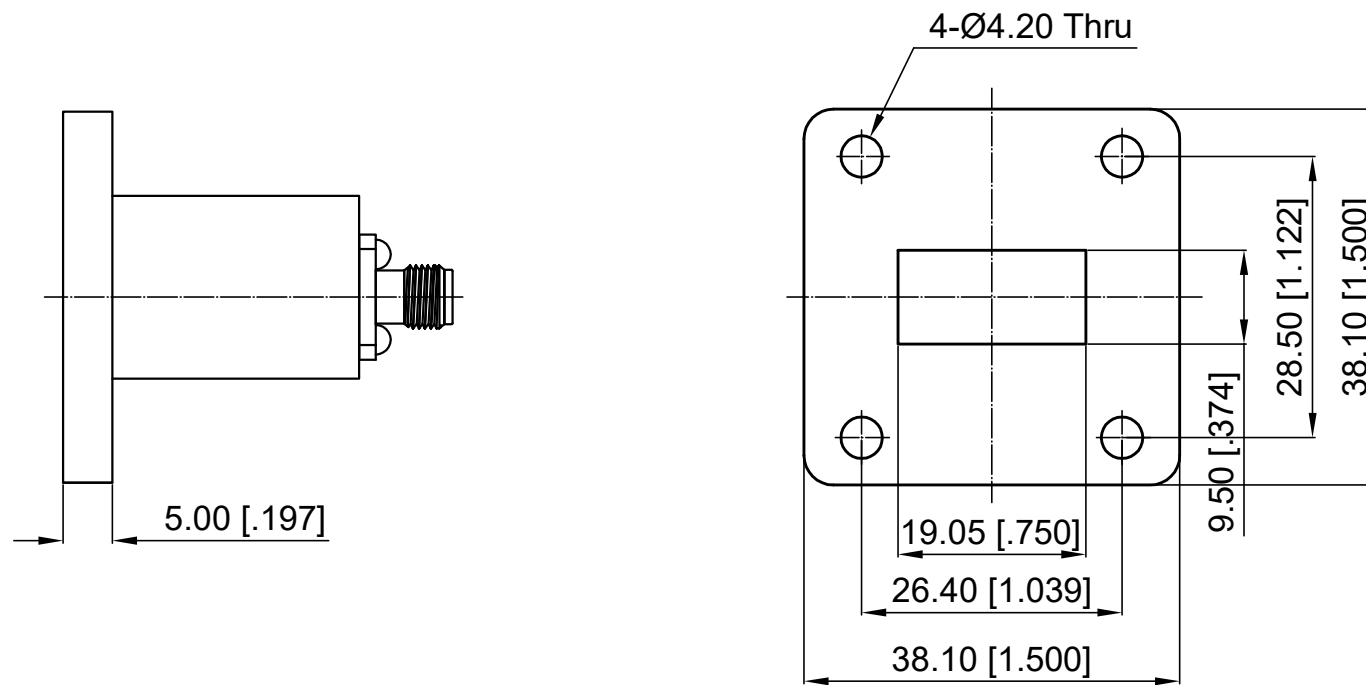

NOTES:

- 1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
- 2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

Drawn:	W. Y 2015.4.14
Checked:	T. L 2015.4.14
Approved:	A. M 2015.4.14
Unless Otherwise Specified Dimensions are in Millimeters, Dimensions in [] are in Inches for Customer Reference Only. Unless Otherwise Specified Tolerance are: .XX ±0.13 [.005"] .X ±0.20 [.008"] X ±0.50 [.019"] .X° ±1° X° ±2°	

Title:	WR75 (UBR120) End Launch to SMA Female Adaptor, Freq 10-15 GHz
Part No:	DWCA75SF

DEEWAVE
www.deewave.com

View:

Size:	Scale:	Sheet:	Rev:
A3	1.5:1	1/1	A