




**ELECTRICAL SPECIFICATIONS**

Frequency Range: 160-200 MHz  
 Impedance: 50 Ohm  
 Insertion Loss: 0.60 dB max.  
 Isolation: 20 dB min.  
 VSWR: 1.25 max.  
 Forward Power: 100W  
 Direction: Clockwise

Revisions			
Rev	Description	Date	Approved:
A	Initial Release	2017.5.15	A. M
B	Specs Updated	2020.11.4	A. M

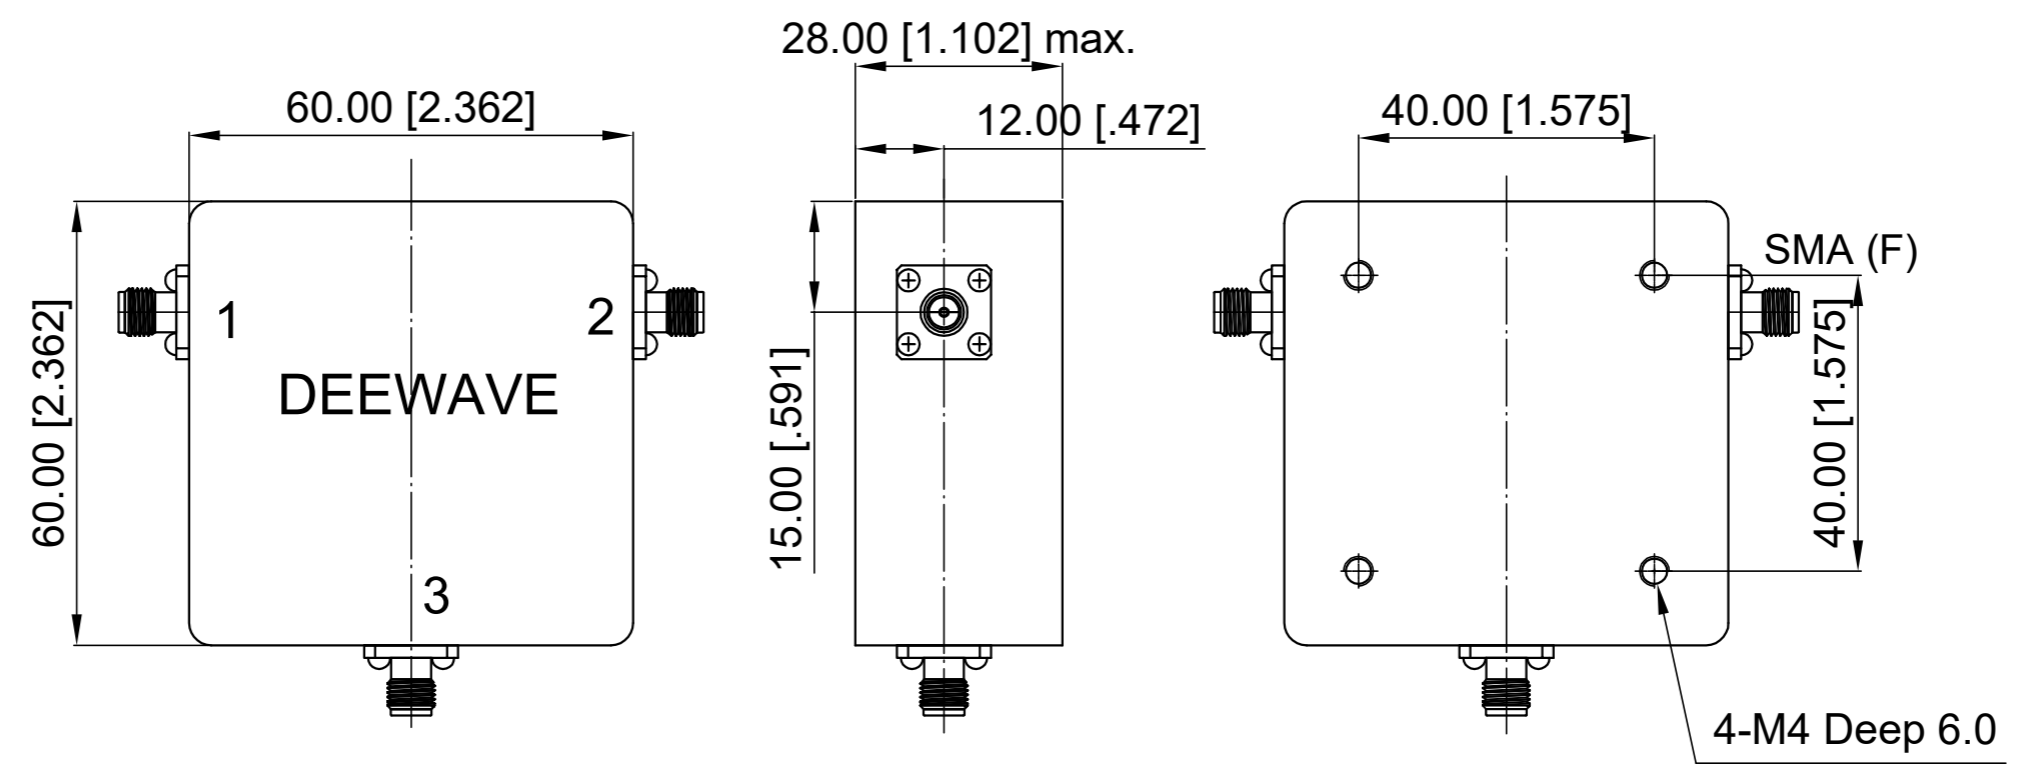

NOTES:  
 1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME  
 2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

Drawn: W. Y 2020.11.4	Title: <b>SMA Female Circulator Freq 160-200 MHz</b>	 <a href="http://www.deewave.com">www.deewave.com</a>	
Checked: T. L 2020.11.4			
Approved: A. M 2020.11.4			
Unless Otherwise Specified Dimensions are in Millimeters, Dimensions in [ ] are in Inches for Customer Reference Only. Unless Otherwise Specified Tolerance are: .XX ±0.13 [.005"] .X ±0.20 [.008"] X ±0.50 [.019"] .X° ±1° X° ±2°		Part No: <b>DCC016020</b>	View: 
Size: A3	Scale: 1:1	Sheet: 1/1	Rev: B