

**ELECTRICAL SPECIFICATIONS**

Frequency Range: 170-200 MHz

Impedance: 50 Ohm


Insertion Loss: 0.60 dB max.

Isolation: 18 dB min.

VSWR: 1.25 max.

Direction: Clockwise

Revisions			
Rev	Description	Date	Approved:
A	Initial Release	2015.2.3	A. M

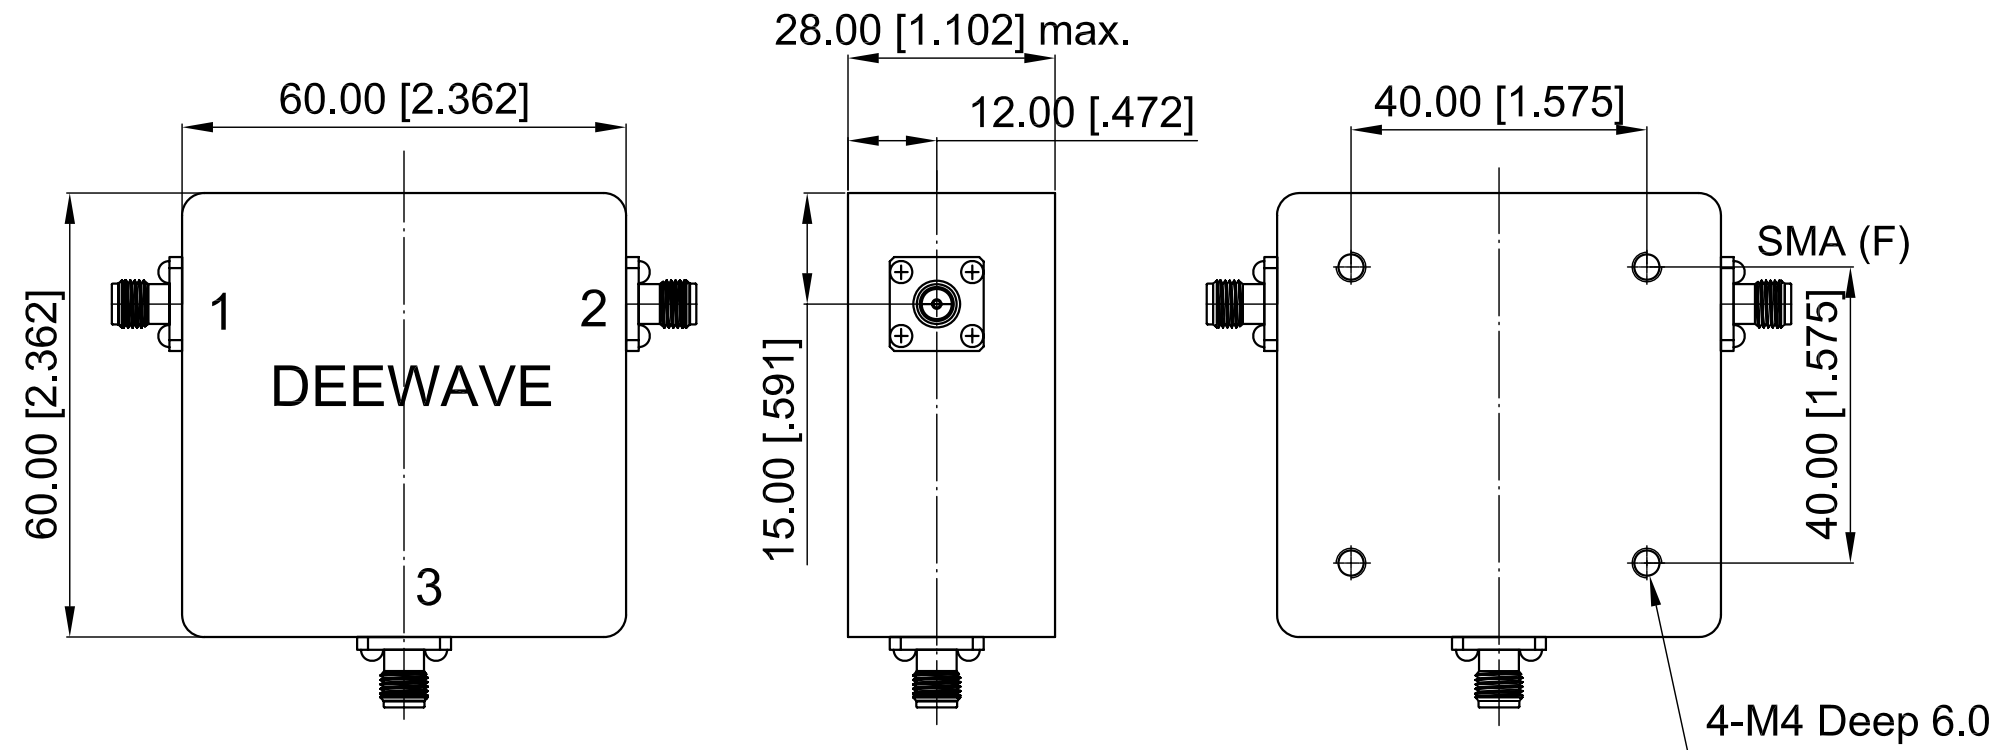

NOTES:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

Drawn:	W. Y 2015.2.3
Checked:	T. L 2015.2.3
Approved:	A. M 2015.2.3
Unless Otherwise Specified Dimensions are in Millimeters, Dimensions in [ ] are in Inches for Customer Reference Only. Unless Otherwise Specified Tolerance are: .XX ±0.13 [.005"] .X ±0.20 [.008"] X ±0.50 [.019"] .X° ±1° X° ±2°	

Title:	SMA Circulator Freq 170-200 MHz
Part No:	DCC017020



View:	
Size:	A3
Scale:	1:1
Sheet:	1/1
Rev:	A