


**ELECTRICAL SPECIFICATIONS**

Frequency Range: 1-2 GHz  
 Impedance: 50 Ohm  
 Insertion Loss: 0.70 dB max.  
 Isolation: 16 dB min.  
 VSWR: 1.40 max.  
 Forward Power: 100 W  
 Direction: Clockwise

Revisions			
Rev	Description	Date	Approved:
A	Initial Release	2020.2.27	A. M
B	Outline Updated	2021.8.22	A. M

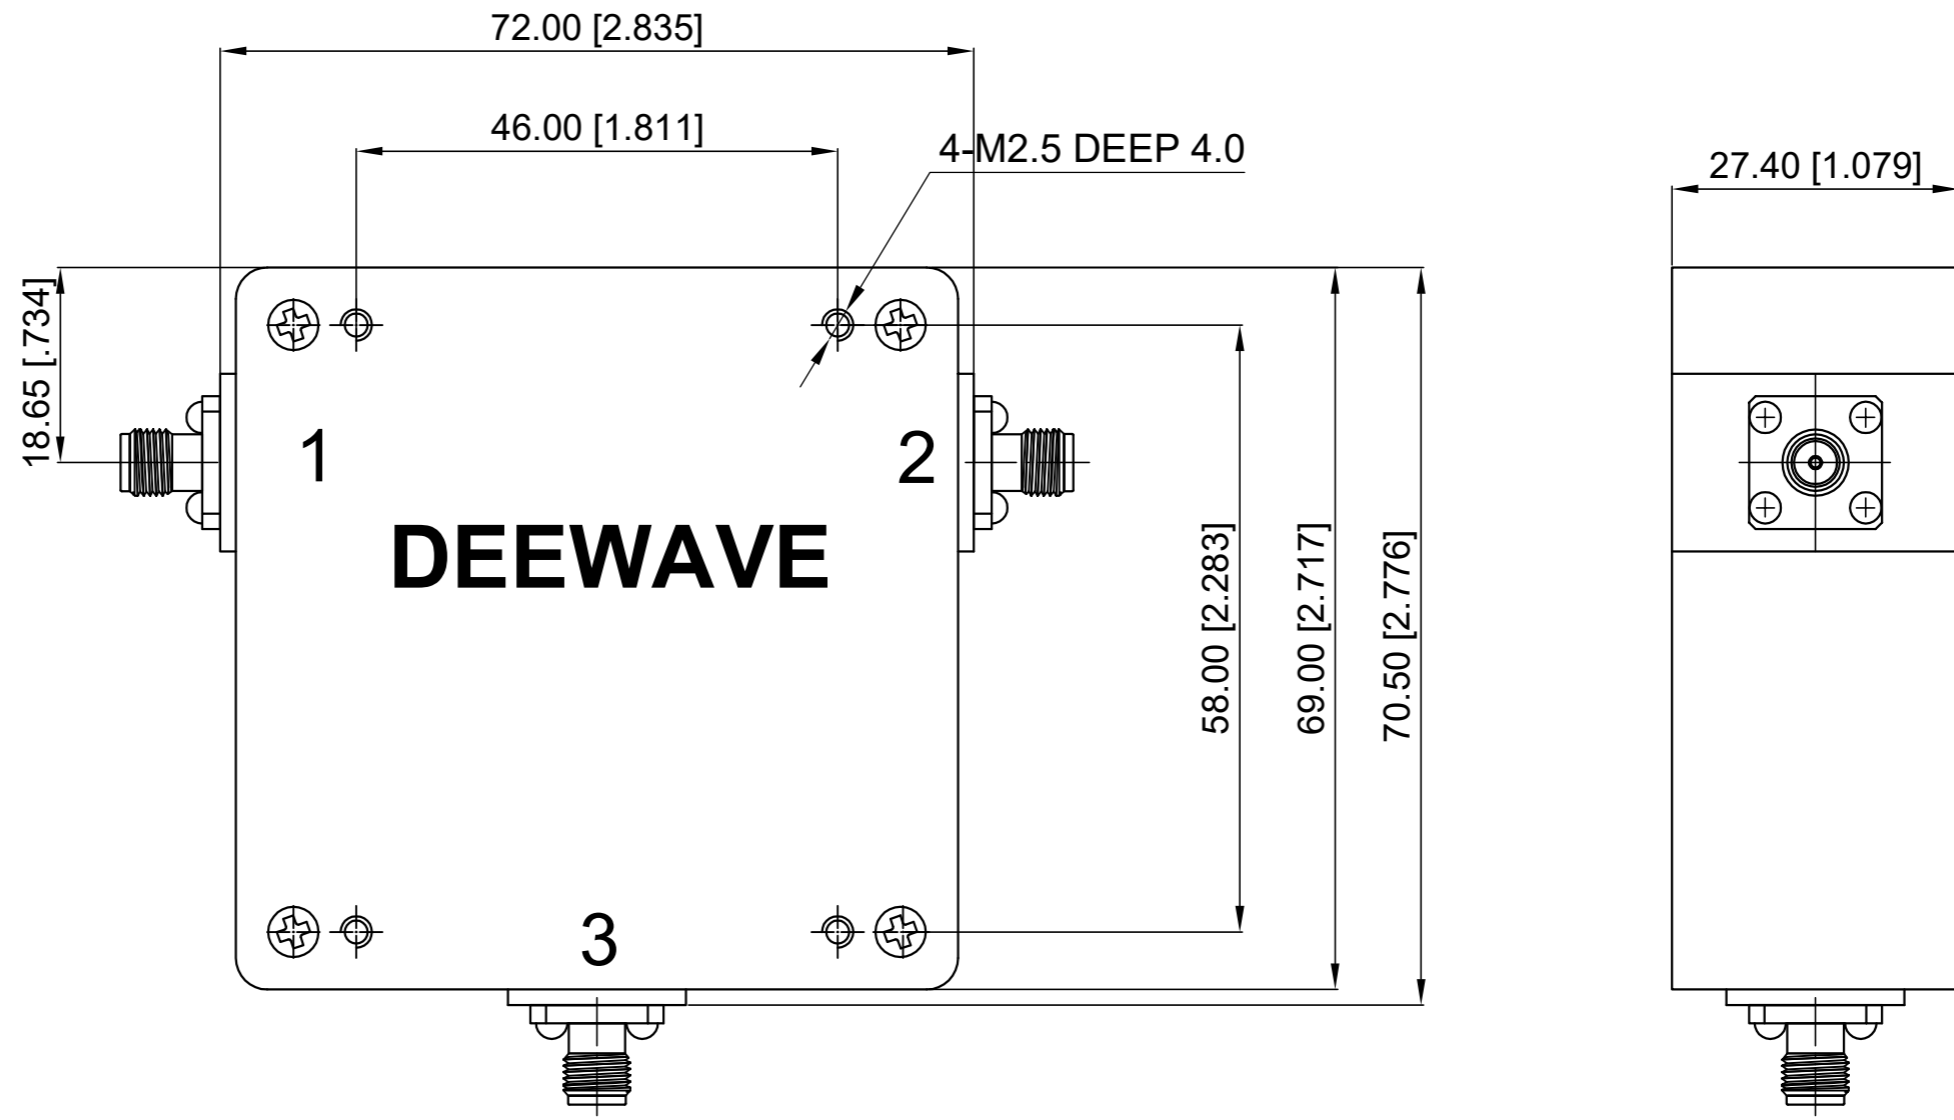

NOTES:  
 1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME  
 2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

Drawn:	W. Y 2021.8.22
Checked:	T. L 2021.8.22
Approved:	A. M 2021.8.22
Unless Otherwise Specified Dimensions are in Millimeters, Dimensions in [ ] are in Inches for Customer Reference Only. Unless Otherwise Specified Tolerance are: .XX ±0.13 [.005"] .X ±0.20 [.008"] X ±0.50 [.019"] .X° ±1° X° ±2°	

Title:	SMA Female Circulator Freq 1-2 GHz
Part No:	DCC100200B



View:	
Size:	A3
Scale:	1:1
Sheet:	1/1
Rev:	B