




ELECTRICAL SPECIFICATIONS

Frequency Range: 1.75-1.85 GHz
 Impedance: 50 Ohm
 Insertion Loss: 0.30 dB max.
 Isolation: 23 dB min.
 VSWR: 1.20 max.
 Forward Power: 50W
 Direction: Clockwise

Revisions			
Rev	Description	Date	Approved:
A	Initial Release	2017.10.18	A. M

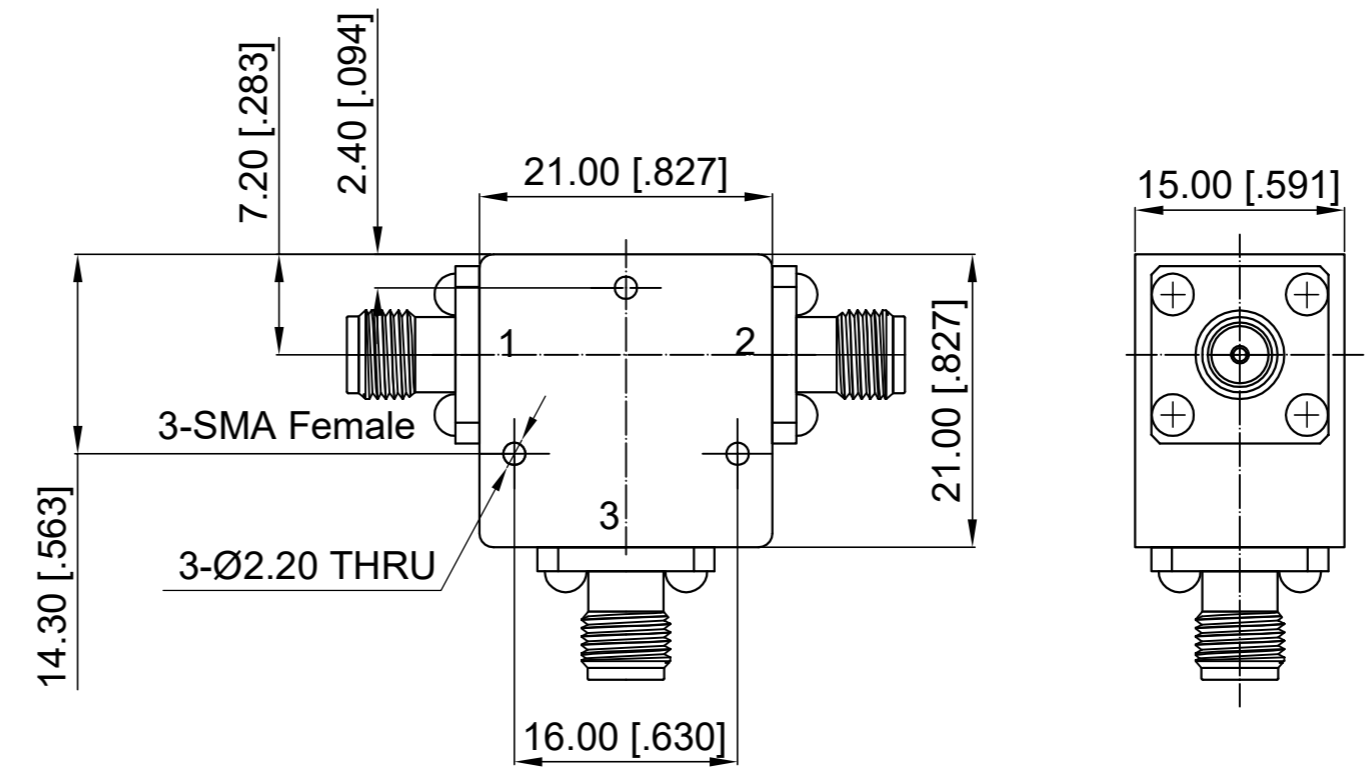

NOTES:
 1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
 2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

Drawn: W. Y 2017.10.18	Title: SMA Female Circulator Freq 1.75-1.85 GHz	 www.deewave.com	
Checked: T. L 2017.10.18			
Approved: A. M 2017.10.18			
Unless Otherwise Specified Dimensions are in Millimeters, Dimensions in [] are in Inches for Customer Reference Only. Unless Otherwise Specified Tolerance are: .XX ±0.13 [.005"] .X ±0.20 [.008"] X ±0.50 [.019"] .X° ±1° X° ±2°		Part No: DCC175185	View: 
Size: A3	Scale: 1:1	Sheet: 1/1	Rev: A