


ELECTRICAL SPECIFICATIONS

Frequency Range: 1.5-3 GHz
 Impedance: 50 Ohm
 Insertion Loss: 1.0 dB max.
 Isolation: 34 dB min.
 VSWR: 1.35 max.
 Forward Power: 100 W
 Direction: Clockwise

| Revisions | | | |
|-----------|-----------------|-----------|-----------|
| Rev | Description | Date | Approved: |
| A | Initial Release | 2016.1.14 | A. M |

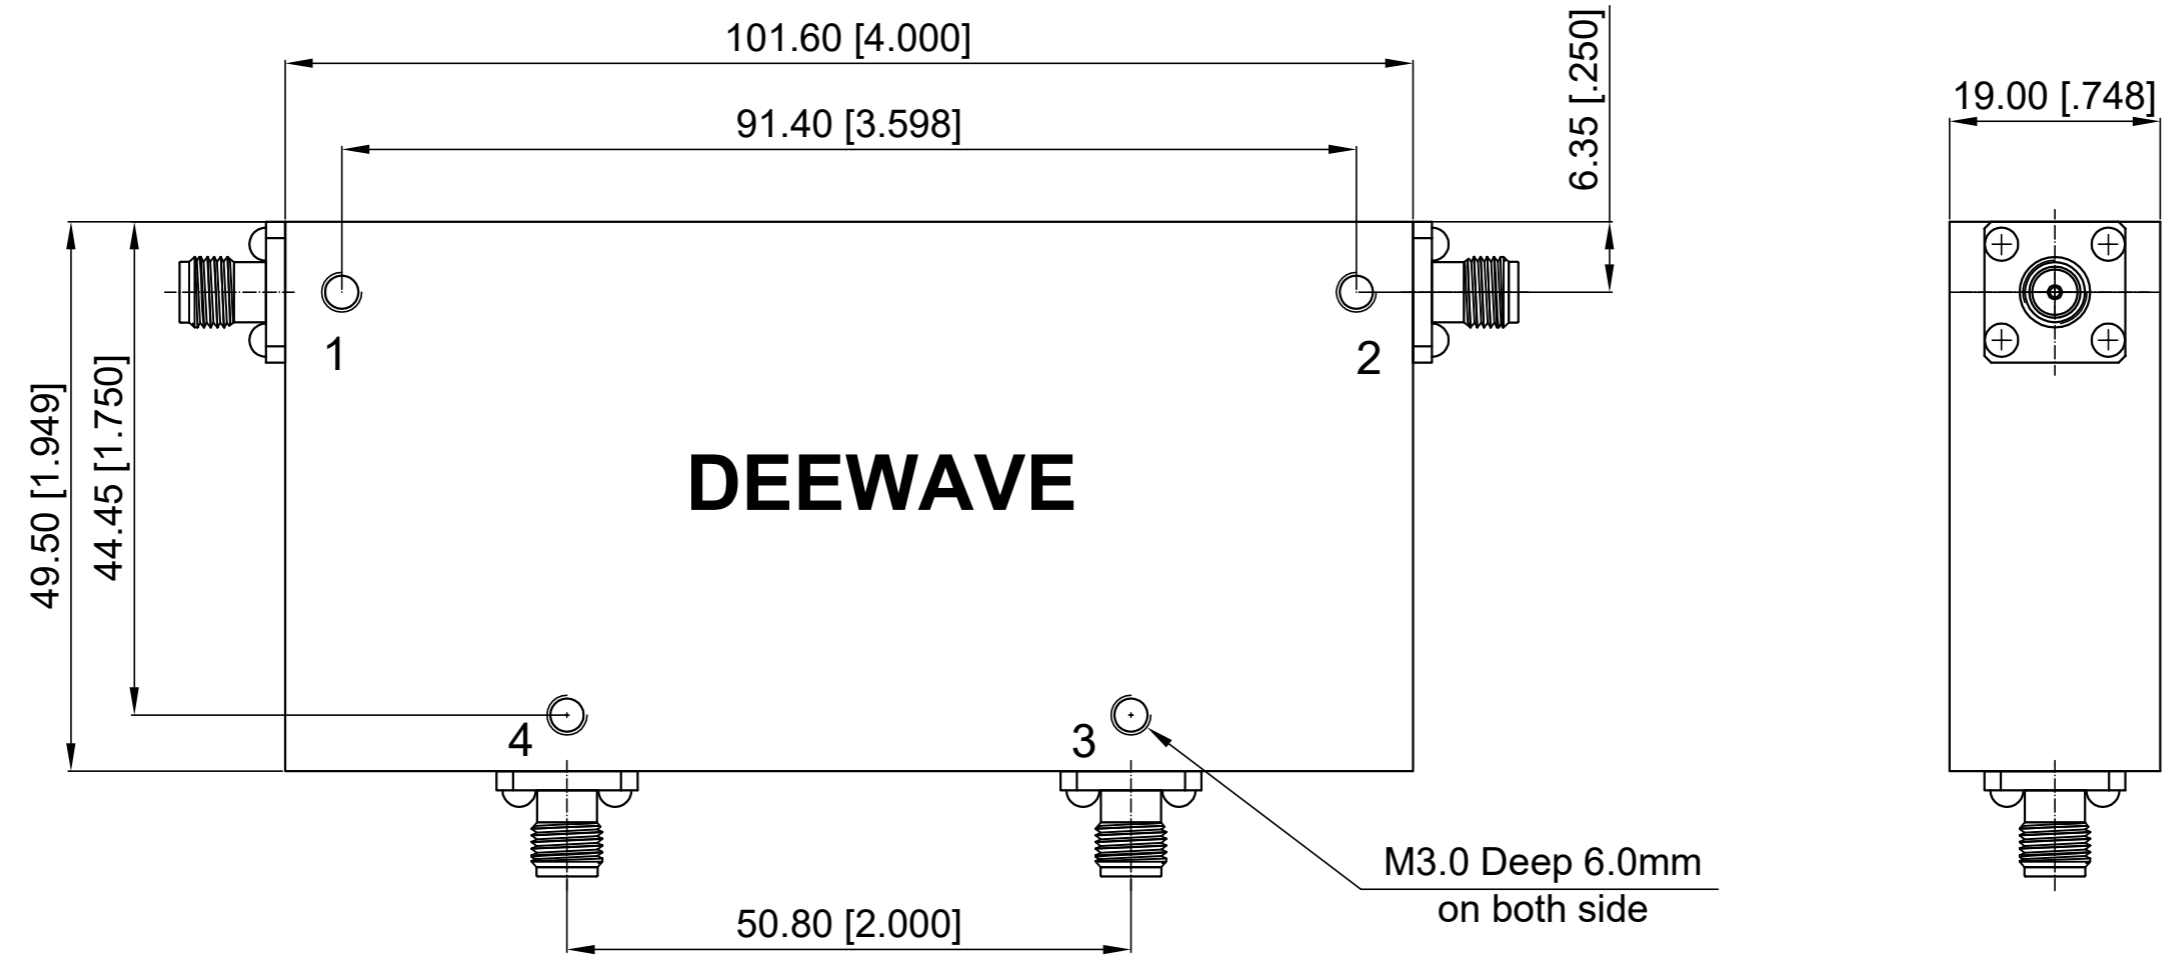

DEEWAVE

M3.0 Deep 6.0mm
on both side

- NOTES:
1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
 2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

| | |
|--|----------------|
| Drawn: | W. Y 2016.1.14 |
| Checked: | T. L 2016.1.14 |
| Approved: | A. M 2016.1.14 |
| Unless Otherwise Specified Dimensions are in Millimeters, Dimensions in [] are in Inches for Customer Reference Only. Unless Otherwise Specified Tolerance are: .XX ±0.13 [.005"] .X ±0.20 [.008"] X ±0.50 [.019"] .X° ±1° X° ±2° | |

| | |
|----------|---|
| Title: | Dual-Junction Circulator, SMA Female, Freq 1.5-3 GHz |
| Part No: | DDCC150300B |



| | |
|--------|-------|
| View: | |
| Size: | A3 |
| Scale: | 1.5:1 |
| Sheet: | 1/1 |
| Rev: | A |