


**ELECTRICAL SPECIFICATIONS**

Frequency Range: 3-6 GHz  
 Impedance: 50 Ohm  
 Insertion Loss: 1.0 dB max.  
 Isolation: 36 dB min.  
 VSWR: 1.30 max.  
 Forward Power: 100W  
 Direction: Clockwise

Revisions			
Rev	Description	Date	Approved:
A	Initial Release	2015.6.27	A. M
B	Height updated to 15mm, 8 holes changed to 6 holes	2023.11.6	A. M

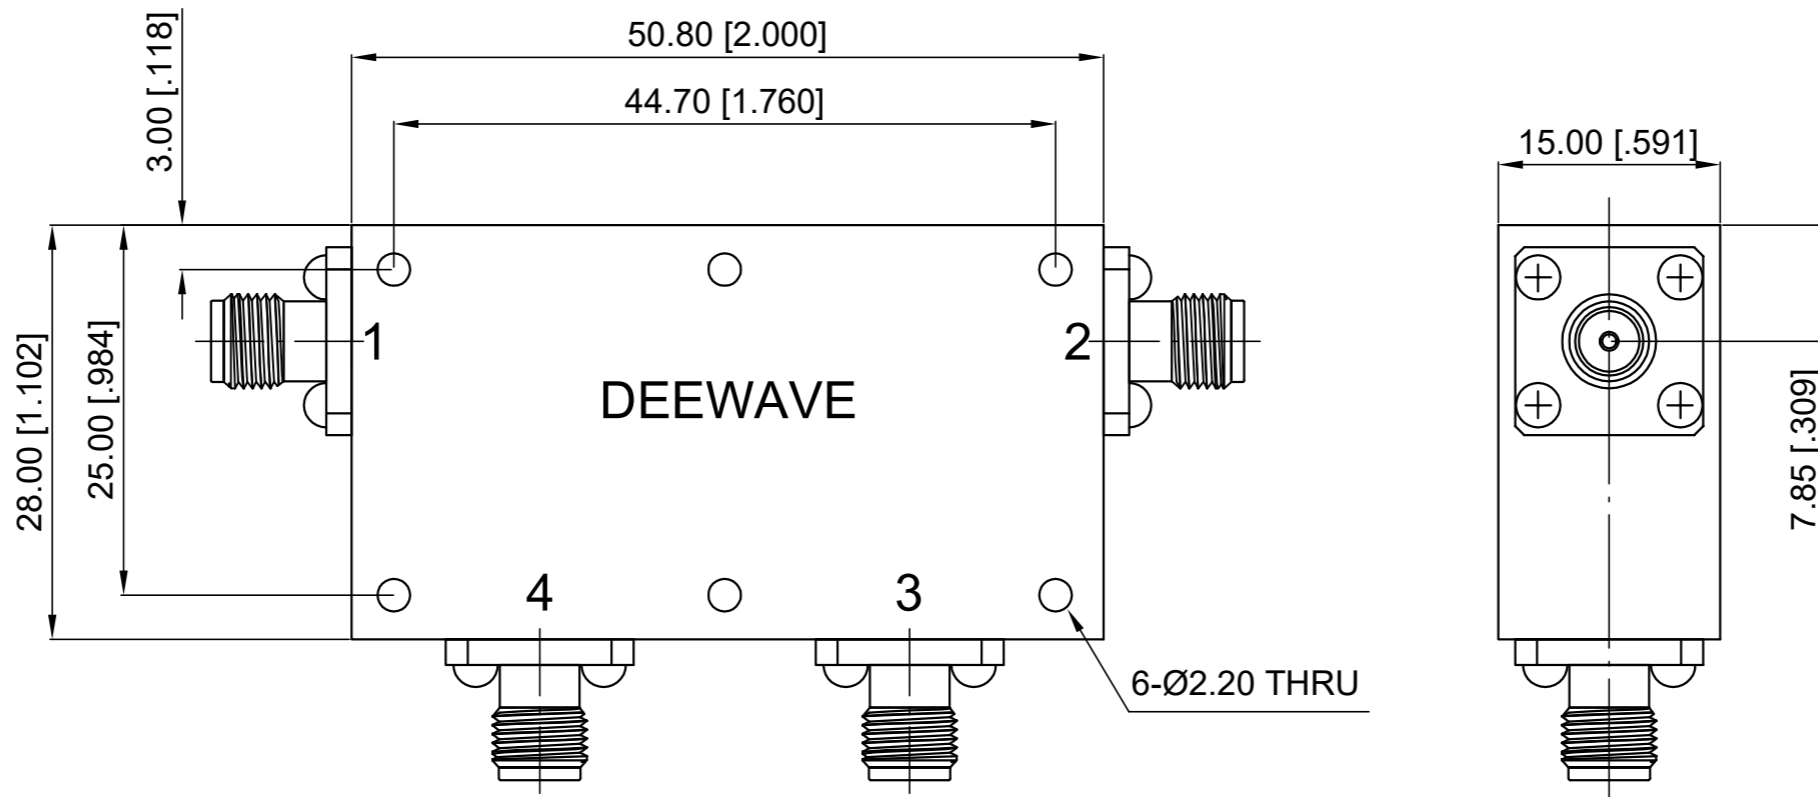

- NOTES:
1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
  2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

Drawn:	W. Y 2023.11.6
Checked:	T. L 2023.11.6
Approved:	A. M 2023.11.6
Unless Otherwise Specified Dimensions are in Millimeters, Dimensions in [ ] are in Inches for Customer Reference Only. Unless Otherwise Specified Tolerance are: .XX ±0.13 [.005"] .X ±0.20 [.008"] X ±0.50 [.019"] .X° ±1° X° ±2°	

Title:	Dual-Junction Circulator, SMA Female, Freq 3-6 GHz
Part No:	DDCC300600B

**DEEWAVE**  
[www.deewave.com](http://www.deewave.com)

View:

Size: A3	Scale: 2:1	Sheet: 1/1	Rev: B
----------	------------	------------	--------