


ELECTRICAL SPECIFICATIONS

Frequency Range: 500-700 MHz
 Impedance: 50 Ohm
 Insertion Loss: 0.8 dB max.
 Isolation: 16 dB min.
 VSWR: 1.50 max.
 Forward Power: 60 W
 Reserve Power: 10 W
 Operation Temp: 0~+60°C

Revisions			
Rev	Description	Date	Approved:
A	Initial Release	2015.06.08	A. M

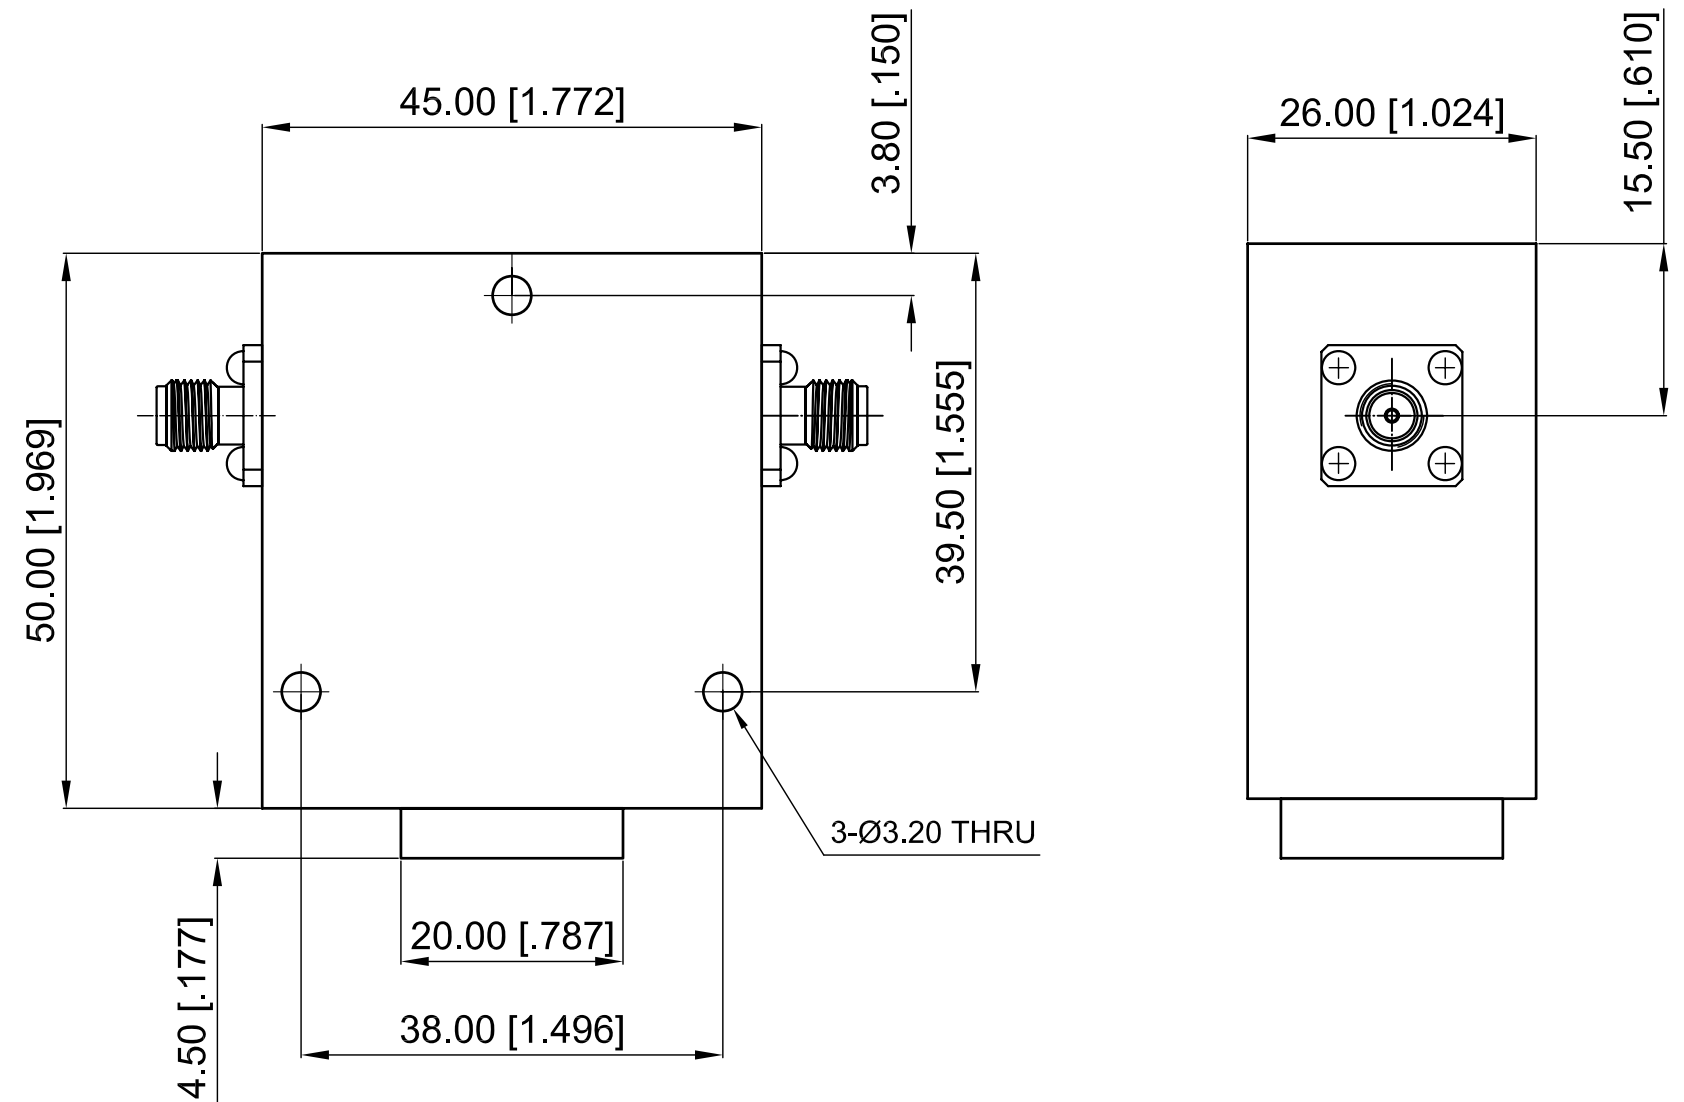

NOTES:
 1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
 2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

Drawn:	W. Y 2015.06.08
Checked:	T. L 2015.06.08
Approved:	A. M 2015.06.08
Unless Otherwise Specified Dimensions are in Millimeters, Dimensions in [] are in Inches for Customer Reference Only. Unless Otherwise Specified Tolerance are: .XX ±0.13 [.005"] .X ±0.20 [.008"] X ±0.50 [.019"] .X° ±1° X° ±2°	

Title:	SMA Isolator Freq 500-700 MHz
Part No:	DCI050070

DEEWAVE
www.deewave.com

View:

Size:	Scale:	Sheet:	Rev:
A3	1.5:1	1/1	A