


ELECTRICAL SPECIFICATIONS

Frequency Range: 40-60 MHz
 Insertion Loss : 2.0 dB Max.
 Isolation : 18 dB Min.
 VSWR: 1.30 Max.
 Forward Power: 100 W
 Direction: Clockwise
 Operation Temp.: 0~+60°C

| Revisions | | | |
|-----------|-----------------|------------|-----------|
| Rev | Description | Date | Approved: |
| A | Initial Release | 2015.10.31 | A. M |

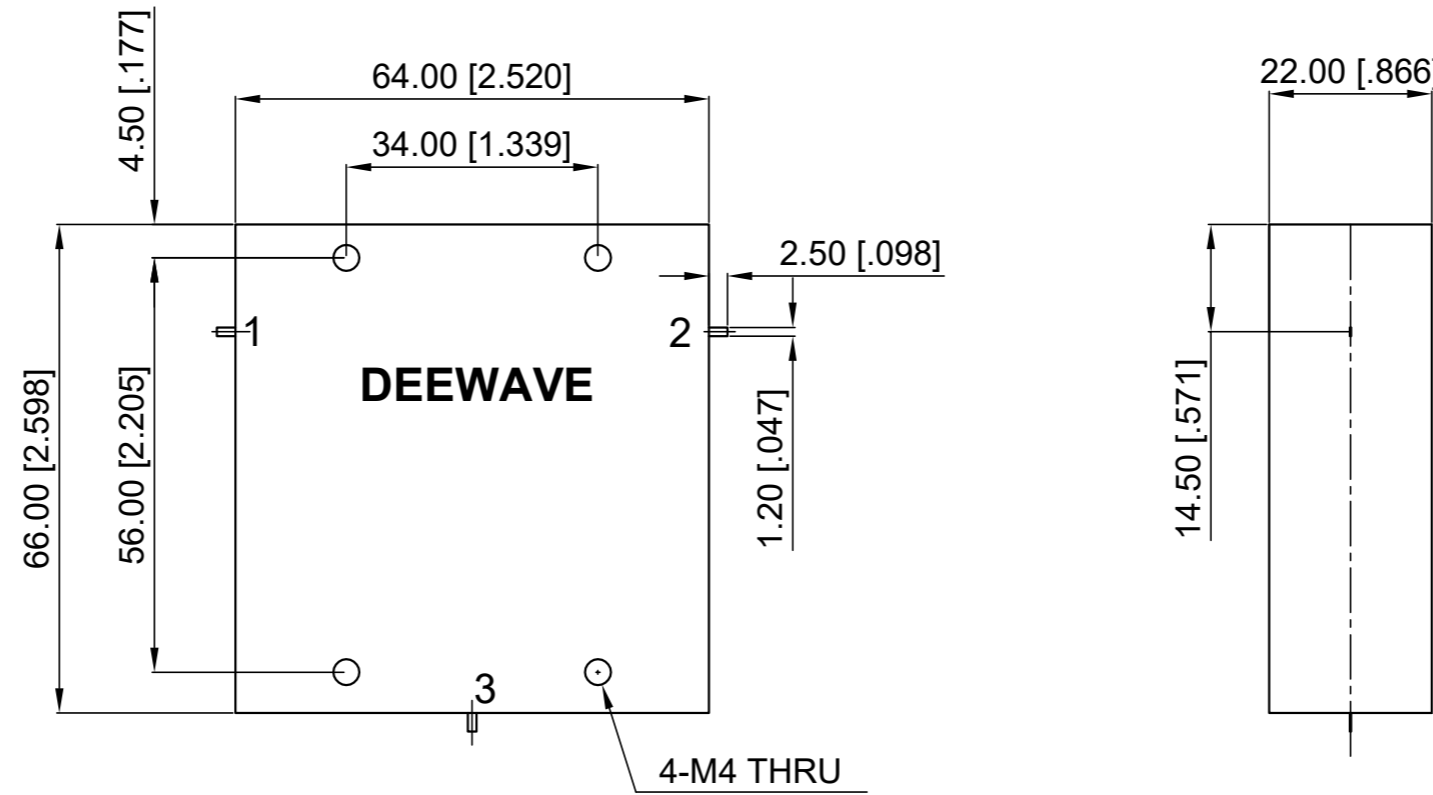

NOTES:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

| | |
|--|-----------------|
| Drawn: | W. Y 2015.10.31 |
| Checked: | T. L 2015.10.31 |
| Approved: | A. M 2015.10.31 |
| Unless Otherwise Specified Dimensions are in Millimeters, Dimensions in [] are in Inches for Customer Reference Only. Unless Otherwise Specified Tolerance are: .XX ±0.13 [.005"] .X ±0.20 [.008"] X ±0.50 [.019"] .X° ±1° X° ±2° | |

| | |
|----------|---|
| Title: | Drop-in Circulator Freq 40-60 MHz |
| Part No: | |



| | | | |
|-------|--------|--------|------|
| View: | | | |
| Size: | Scale: | Sheet: | Rev: |
| A3 | 1:1 | 1/1 | A |