

6

5

4

3

2


1

Revisions

Rev	Description	Date	Approved:
A	Initial Release	2015.10.31	A. M

ELECTRICAL SPECIFICATIONS

Frequency Range: 1-2 GHz
 Insertion Loss : 0.60 dB Max.
 Isolation : 17 dB Min.
 VSWR: 1.40 Max.
 Forward Power: 100 W
 Direction: Clockwise
 Operation Temp.: -10~+70°C

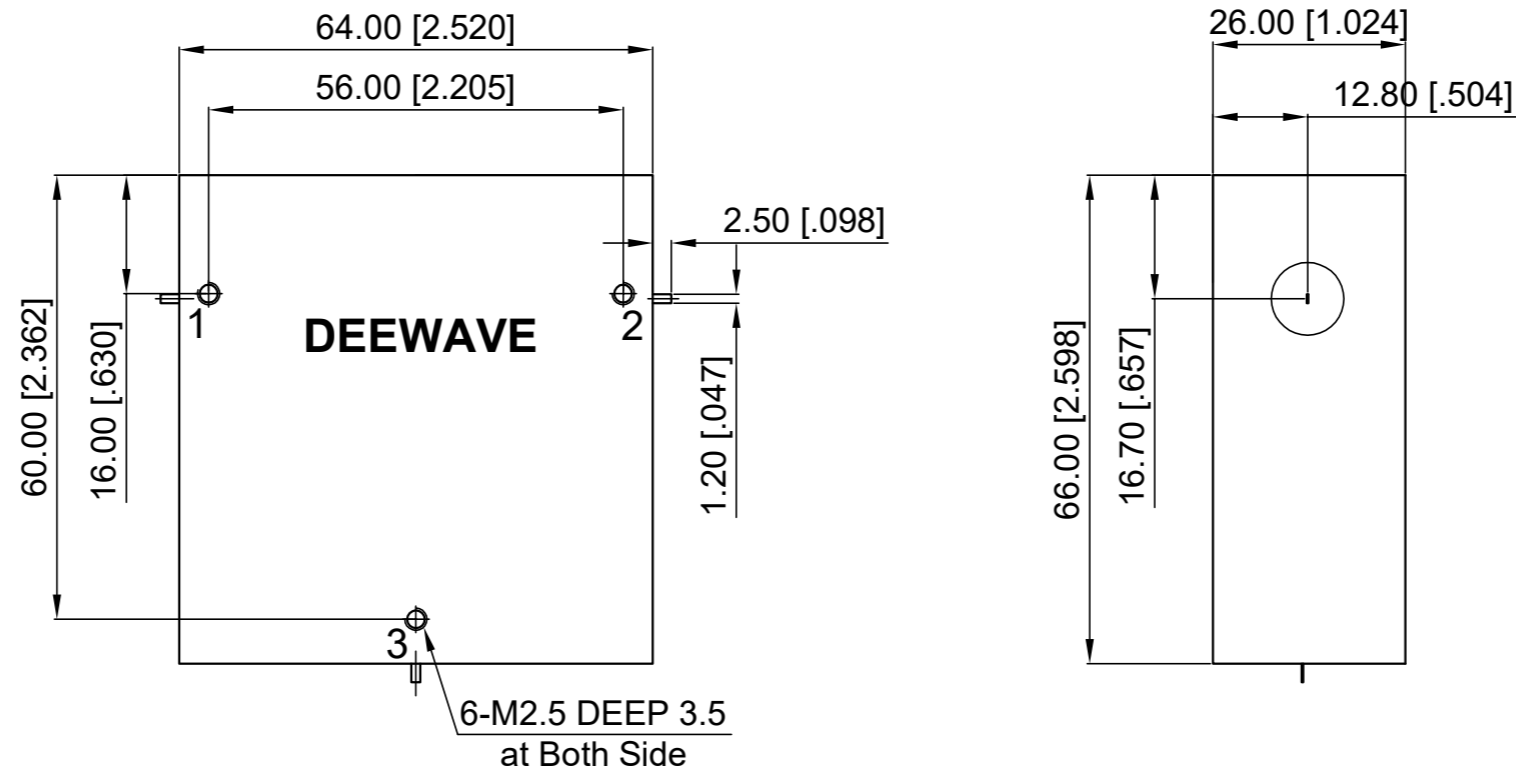

NOTES:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

Drawn:	W. Y 2015.10.31
Checked:	T. L 2015.10.31
Approved:	A. M 2015.10.31
Unless Otherwise Specified Dimensions are in Millimeters, Dimensions in [] are in Inches for Customer Reference Only. Unless Otherwise Specified Tolerance are: .XX ±0.13 [.005"] .X ±0.20 [.008"] X ±0.50 [.019"] .X° ±1° X° ±2°	

Title:	Drop-in Circulator Freq 1-2 GHz
Part No:	



View:	
Size:	A3
Scale:	1:1
Sheet:	1/1
Rev:	A

6

5

4

3

2

1