

ELECTRICAL SPECIFICATIONS

Frequency Range: 1.5-1.65 GHz

Insertion Loss: 0.4 dB max.

Isolation: 20 dB min.


VSWR: 1.25 max.

Forward Power: 100 W

Direction: Clockwise

Operation Temp.: -30~+75°C

Revisions			
Rev	Description	Date	Approved:
A	Initial Release	2020.7.24	A. M

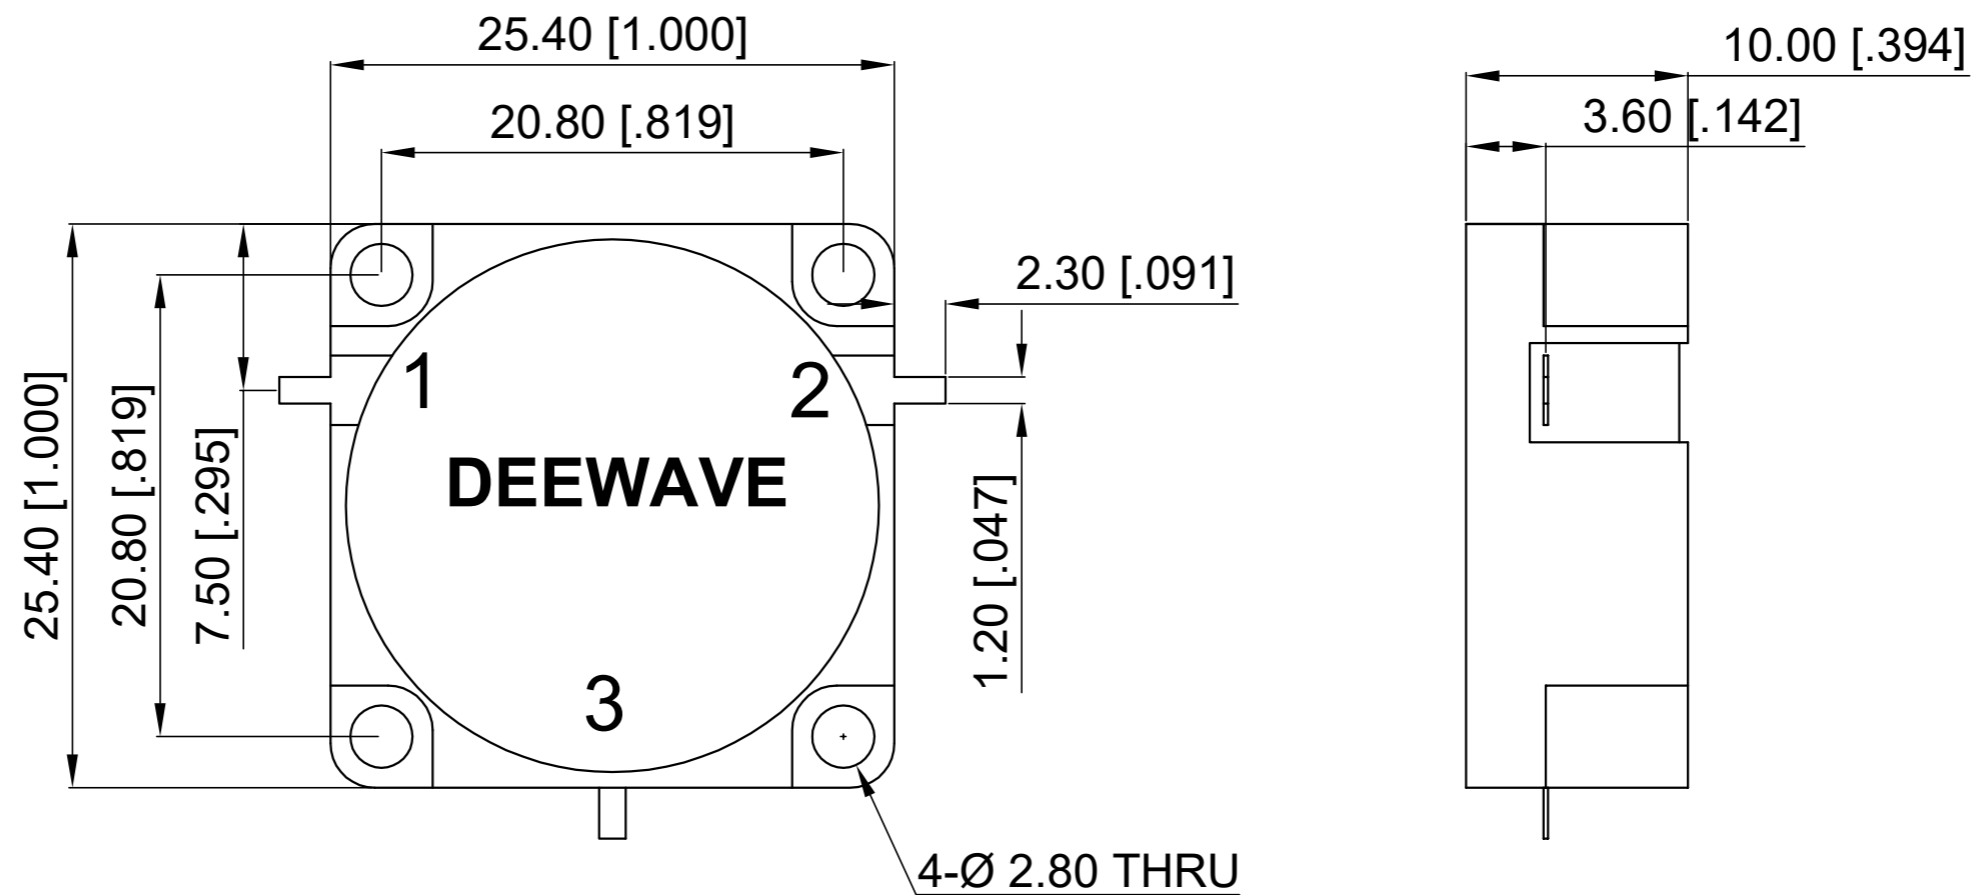

- NOTES:
1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
 2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

Drawn:	W. Y 2020.7.24
Checked:	T. L 2020.7.24
Approved:	A. M 2020.7.24
Unless Otherwise Specified Dimensions are in Millimeters, Dimensions in [] are in Inches for Customer Reference Only. Unless Otherwise Specified Tolerance are: .XX ±0.13 [.005"] .X ±0.20 [.008"] X ±0.50 [.019"] .X° ±1° X° ±2°	

Title:	Drop-in Circulator Freq 1.5-1.65 GHz
Part No:	DDC150165

DEEWAVE
www.deewave.com

View:

Size: A3	Scale: 3:1	Sheet: 1/1	Rev: B
----------	------------	------------	--------