

ELECTRICAL SPECIFICATIONS

Frequency Range: 23.5-24.5 GHz

Impedance: 50 Ohm


Insertion Loss: 0.6 dB max.

Isolation: 18 dB min.

VSWR: 1.35 max.

Director: Clockwise

Revisions			
Rev	Description	Date	Approved:
A	Initial Release	2020.1.9	A. M

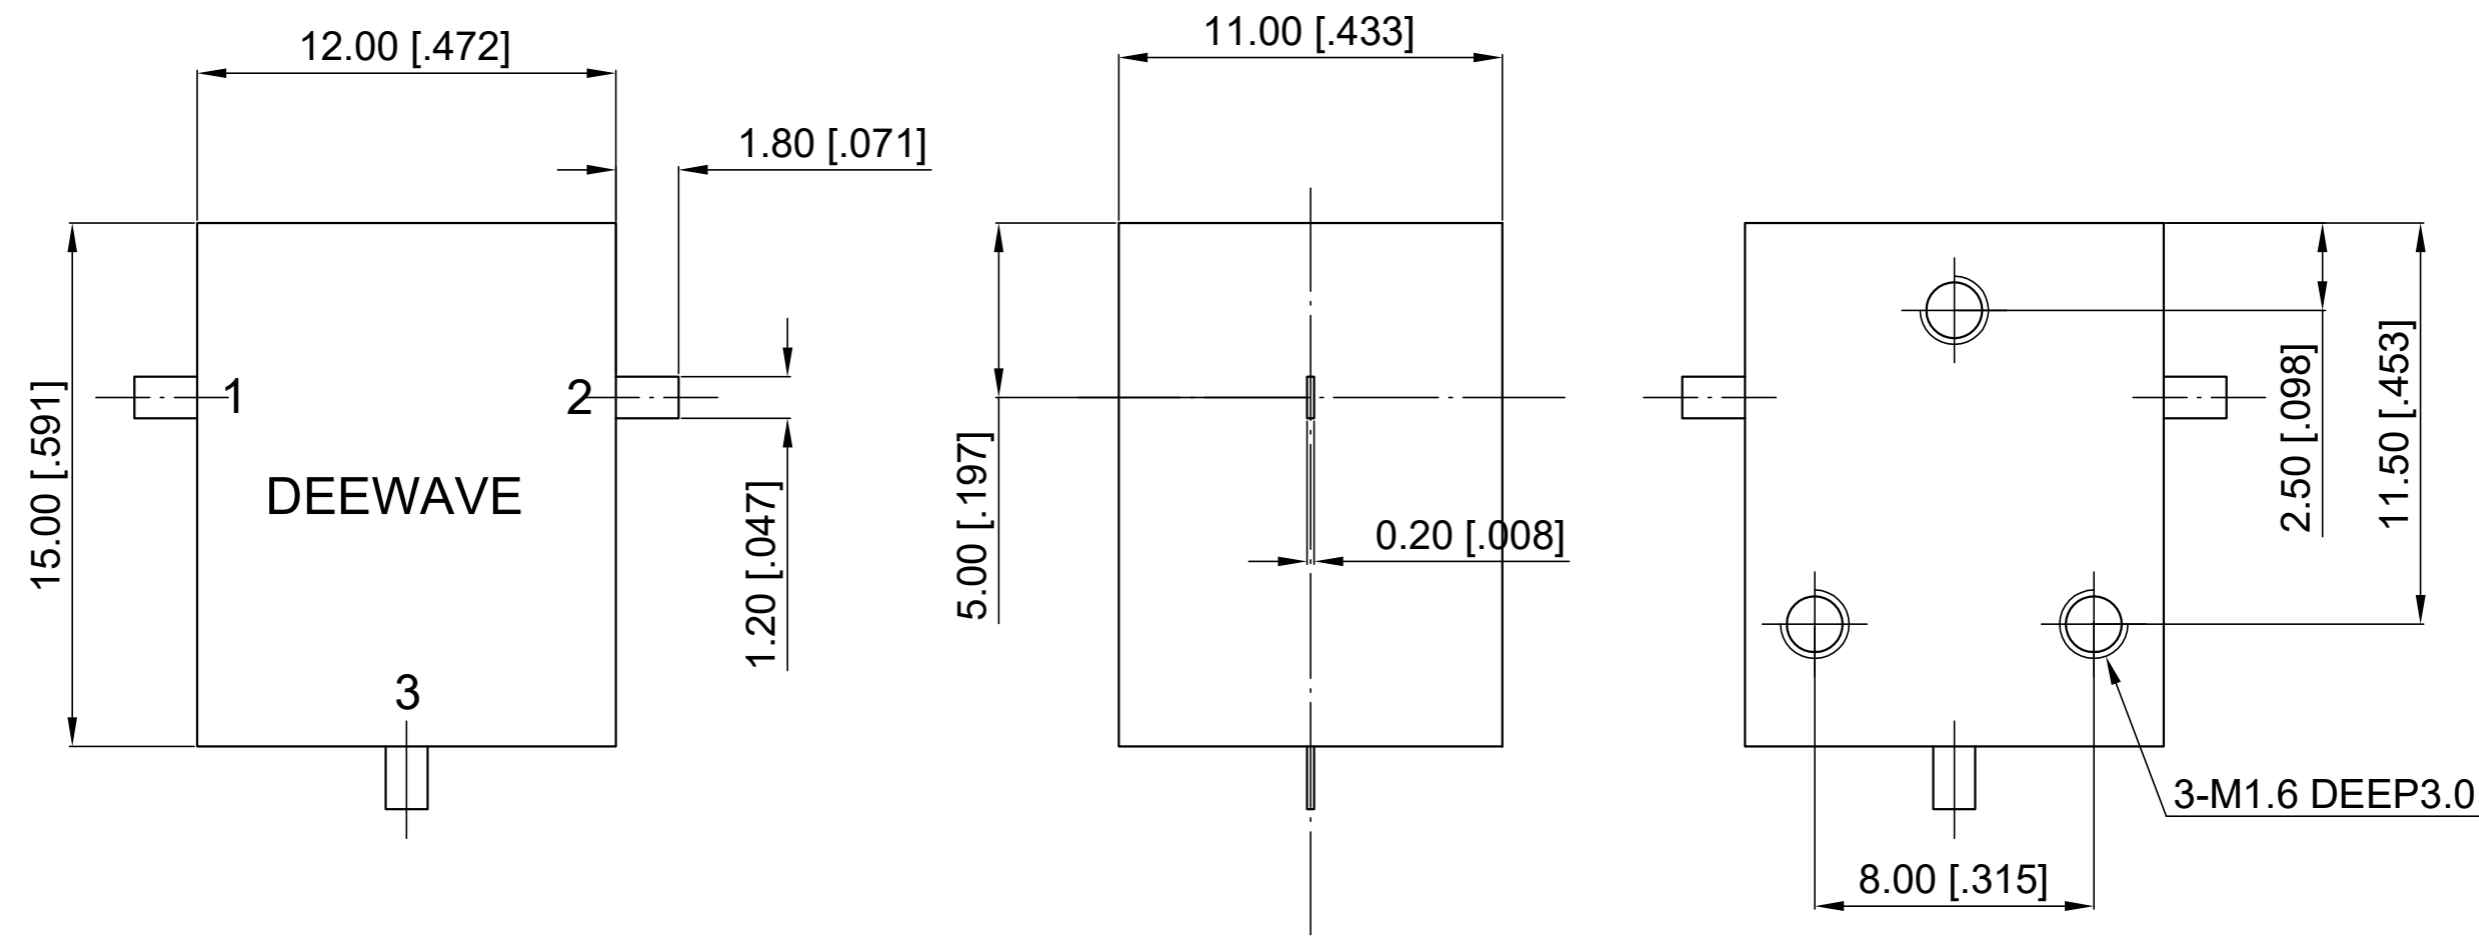

- NOTES:
1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
 2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

Drawn:	W. Y 2020.1.9
Checked:	T. L 2020.1.9
Approved:	A. M 2020.1.9
Unless Otherwise Specified Dimensions are in Millimeters, Dimensions in [] are in Inches for Customer Reference Only. Unless Otherwise Specified Tolerance are: .XX ±0.13 [.005"] .X ±0.20 [.008"] X ±0.50 [.019"] .X° ±1° X° ±2°	

Title:
**Drop-in Circulator
Freq 23.5-24.5 GHz**

Part No:
DDC23502450

DEEWAVE
www.deewave.com

View:

Size: A3	Scale: 4:1	Sheet: 1/1	Rev: A
-------------	---------------	---------------	-----------