


ELECTRICAL SPECIFICATIONS

Frequency Range: 3-6 GHz
 Insertion Loss: 0.5 dB max.
 Isolation: 18 dB min.
 VSWR: 1.30 max.
 Forward Power: 100 W
 Direction: Clockwise
 Operation Temp.: -30~+75°C

Revisions			
Rev	Description	Date	Approved:
A	Initial Release	2020.1.21	A. M

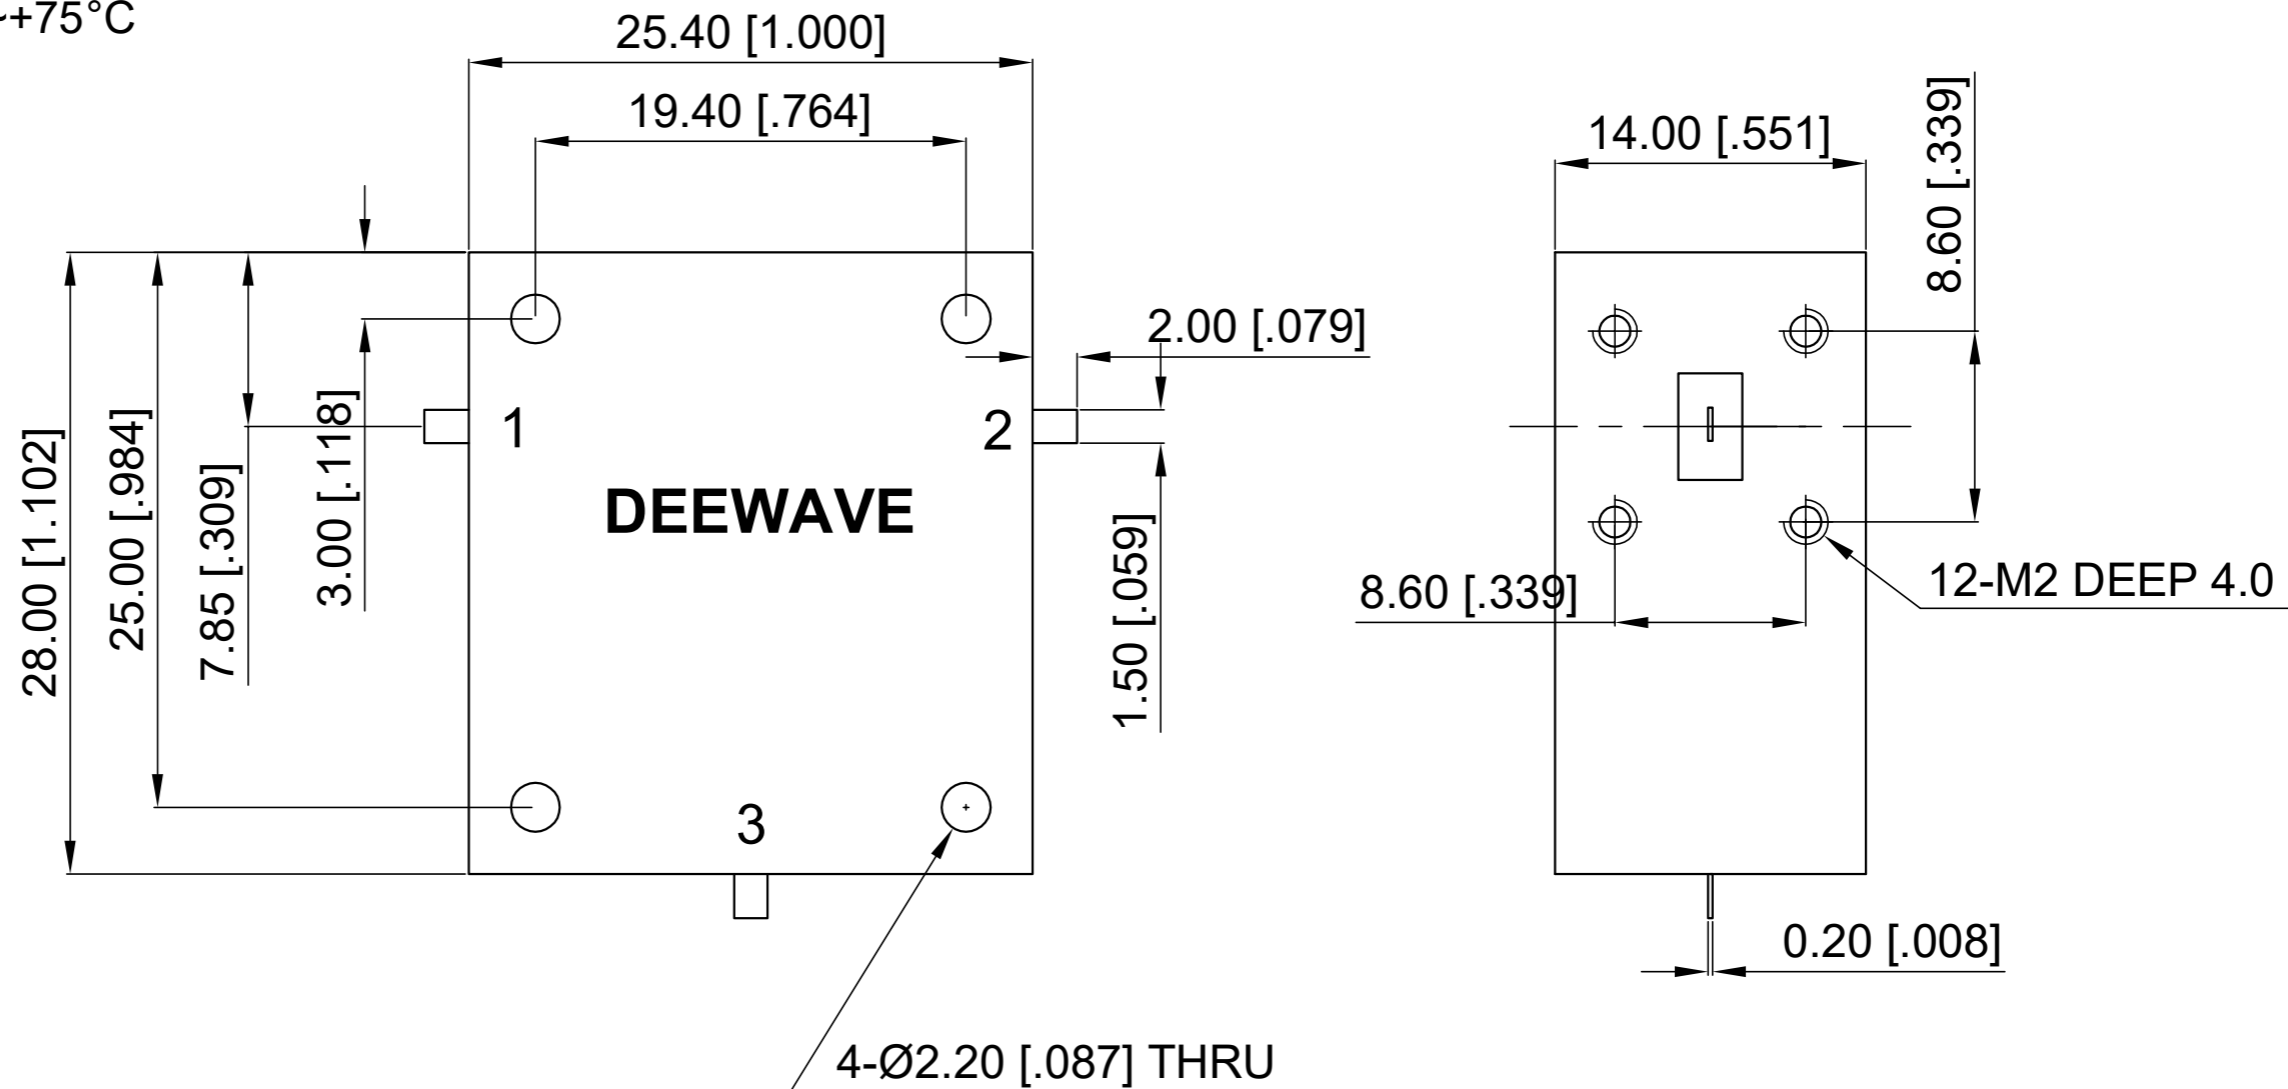

- NOTES:
- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
 - CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

Drawn:	W. Y 2020.1.21
Checked:	T. L 2020.1.21
Approved:	A. M 2020.1.21
Unless Otherwise Specified Dimensions are in Millimeters, Dimensions in [] are in Inches for Customer Reference Only. Unless Otherwise Specified Tolerance are: .XX ±0.13 [.005"] .X ±0.20 [.008"] X ±0.50 [.019"] .X° ±1° X° ±2°	

Title:
**Drop-in Circulator
 Freq 3-6 GHz**

Part No:
DDC300600B



View:	
Size:	A3
Scale:	3:1
Sheet:	1/1
Rev:	A