

Performance Features

Nominal Impedance: 50Ω

Durability: 500 Cycles


Operating Temperature: -55°C~+125°C

Materials/Finishes


Housing: Type 303 Stainless Steel - Polished & Passivated

Center Contact: Beryllium Copper Plated Gold

Insulators: PEI/PTFE

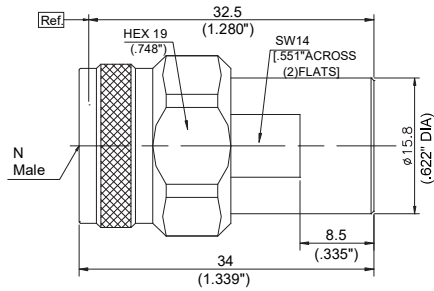

P/N	DPT281-18-2
Descr.	N Male Termination
Freq.	DC-18GHz
VSWR	1.15:1(Max)
Power	2W

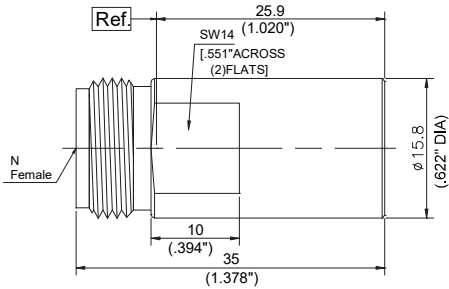

P/N	DPT280-18-2
Descr.	N Female Termination
Freq.	DC-18GHz
VSWR	1.15:1(Max)
Power	2W