

6

5

4

3

2

1

ELECTRICAL PERFORMANCE

Frequency Range: 14.5-18 GHz

VSWR: 1.10 max.

Port 1: WR62 (UBR140)


Port 2: WR51 (UBR180)

MATERIAL

Body: Brass plated Ag



Paint: Gray

Revisions			
Rev	Description	Date	Approved:
A	Initial Release	2023.3.15	A. M

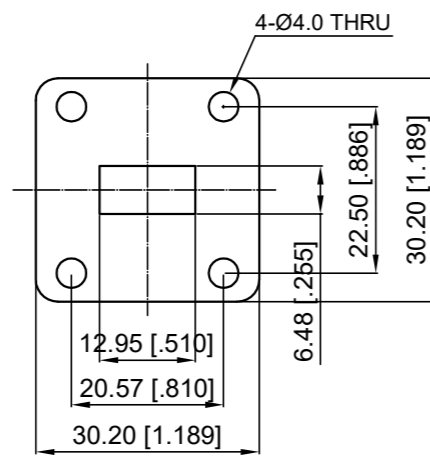

UBR180

UBR140

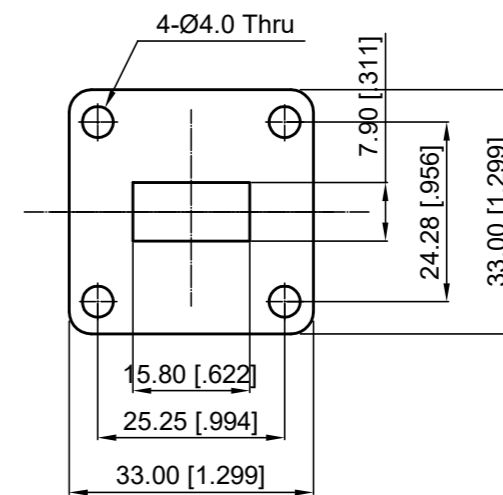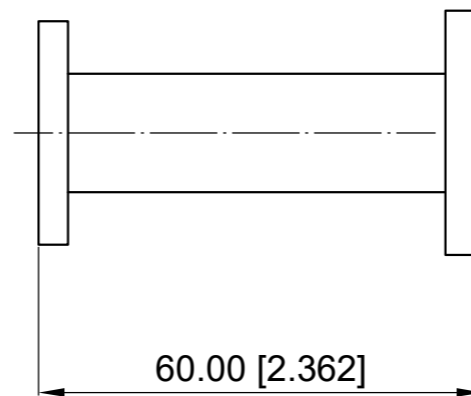

NOTES:

- 1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
- 2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

Drawn:	W. Y 2023.3.15
Checked:	T. L 2023.3.15
Approved:	A. M 2023.3.15
Unless Otherwise Specified Dimensions are in Millimeters, Dimensions in [] are in Inches for Customer Reference Only. Unless Otherwise Specified Tolerance are: .XX ±0.13 [.005"] .X ±0.20 [.008"] X ±0.50 [.019"] .X° ±1° X° ±2°	

Title:	WR62 to WR51 Waveguide Transition, 60mm Length
Part No:	DWT62-51-60

DEEWAVE
www.deewave.com

View:

Size: A3	Scale: 1:1	Sheet: 1/1	Rev: A
----------	------------	------------	--------

6

5

4

3

2

1