
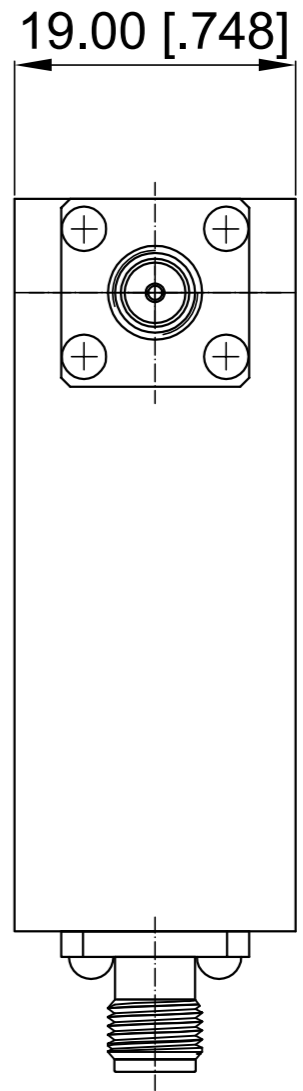


ELECTRICAL SPECIFICATIONS

Frequency Range: 1.35-2.7 GHz
 Impedance: 50 Ohm
 Insertion Loss: 0.70 dB max.
 Isolation: 17 dB min.
 VSWR: 1.35 max.
 Forward Power: 100 W
 Direction: Clockwise
 Operation Temp.: -10~+60°C

Revisions			
Rev	Description	Date	Approved:
A	Initial Release	2016.1.14	A. M

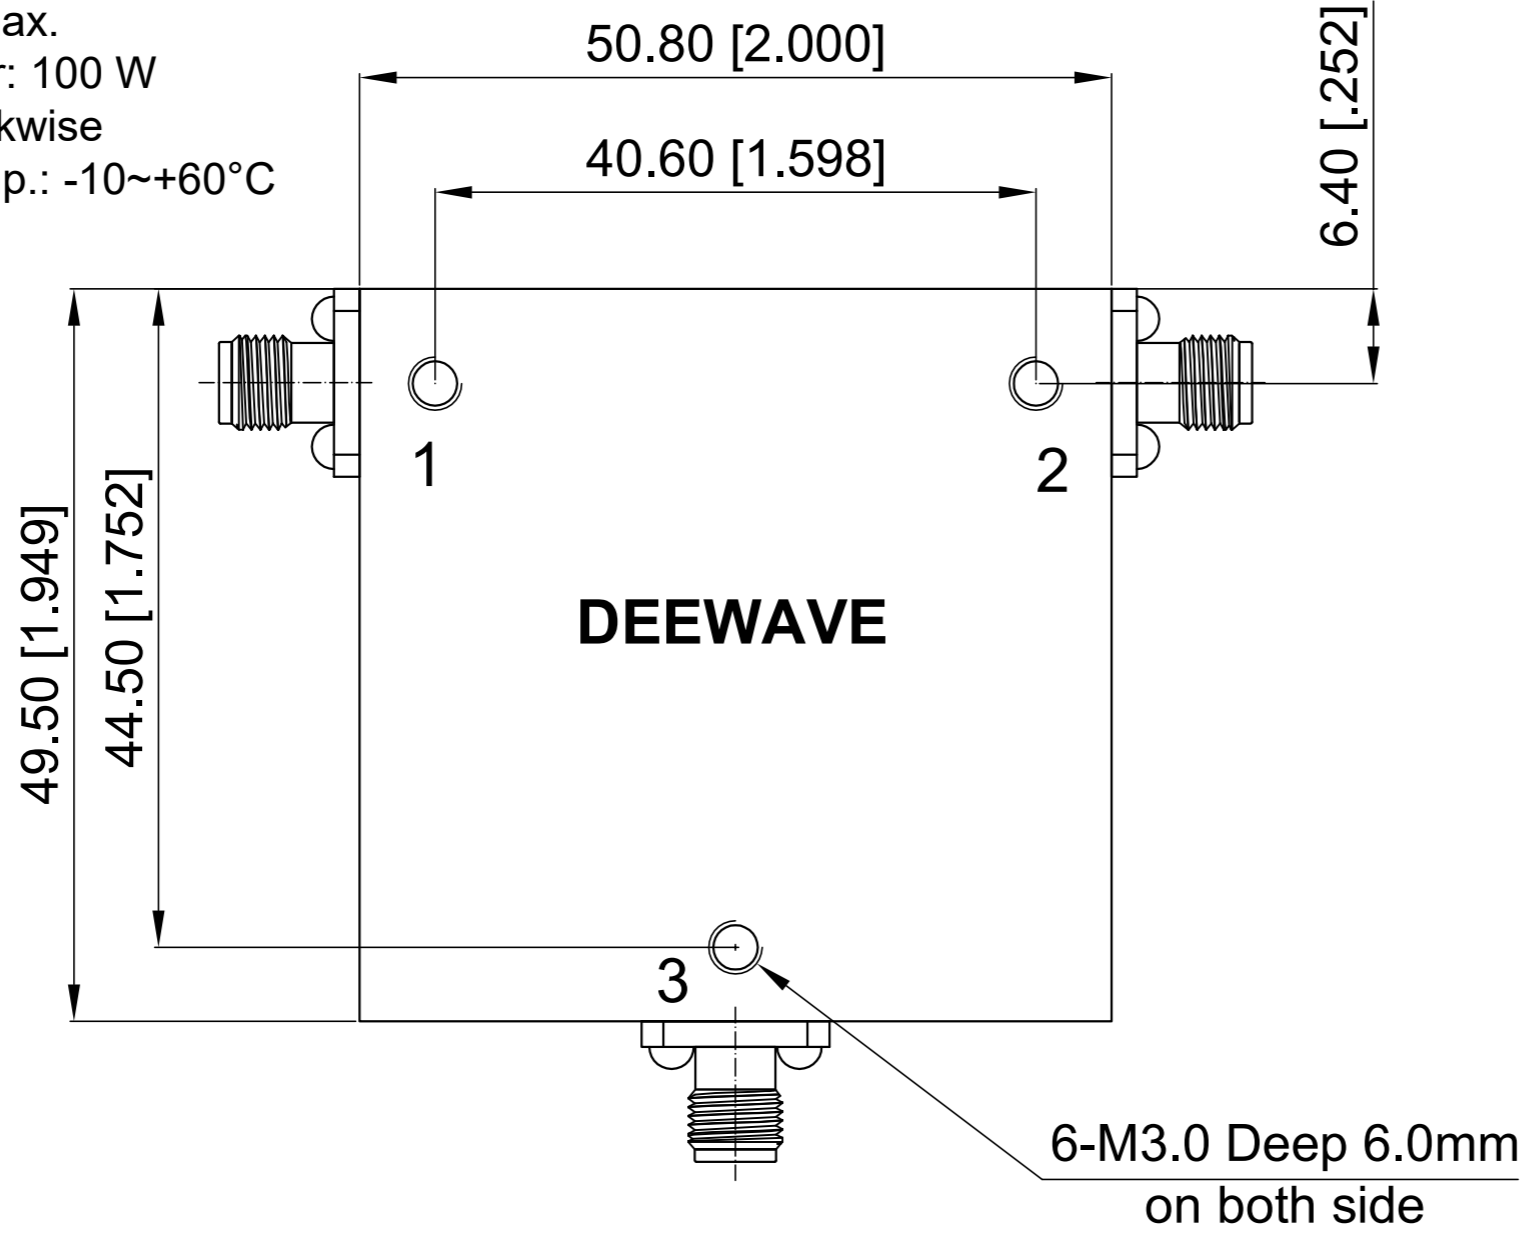

- NOTES:
1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
 2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

Drawn:	W. Y 2016.1.14
Checked:	T. L 2016.1.14
Approved:	A. M 2016.1.14
Unless Otherwise Specified Dimensions are in Millimeters, Dimensions in [] are in Inches for Customer Reference Only. Unless Otherwise Specified Tolerance are: .XX ±0.13 [.005"] .X ±0.20 [.008"] X ±0.50 [.019"] .X° ±1° X° ±2°	

Title:	SMA Female Circulator Freq 1.35-2.7 GHz
Part No:	DCC135270B



View:	
Size:	A3
Scale:	2:1
Sheet:	1/1
Rev:	A