


ELECTRICAL SPECIFICATIONS

Frequency Range: 4-8 GHz
 Impedance: 50 Ohm
 Insertion Loss: 1.20 dB max.
 Isolation: 36 dB min.
 VSWR: 1.30 max.
 Forward Power: 50 W
 Direction: Clockwise

Revisions			
Rev	Description	Date	Approved:
A	Initial Release	2021.1.26	A. M
B	Outline updated	2023.11.6	A. M

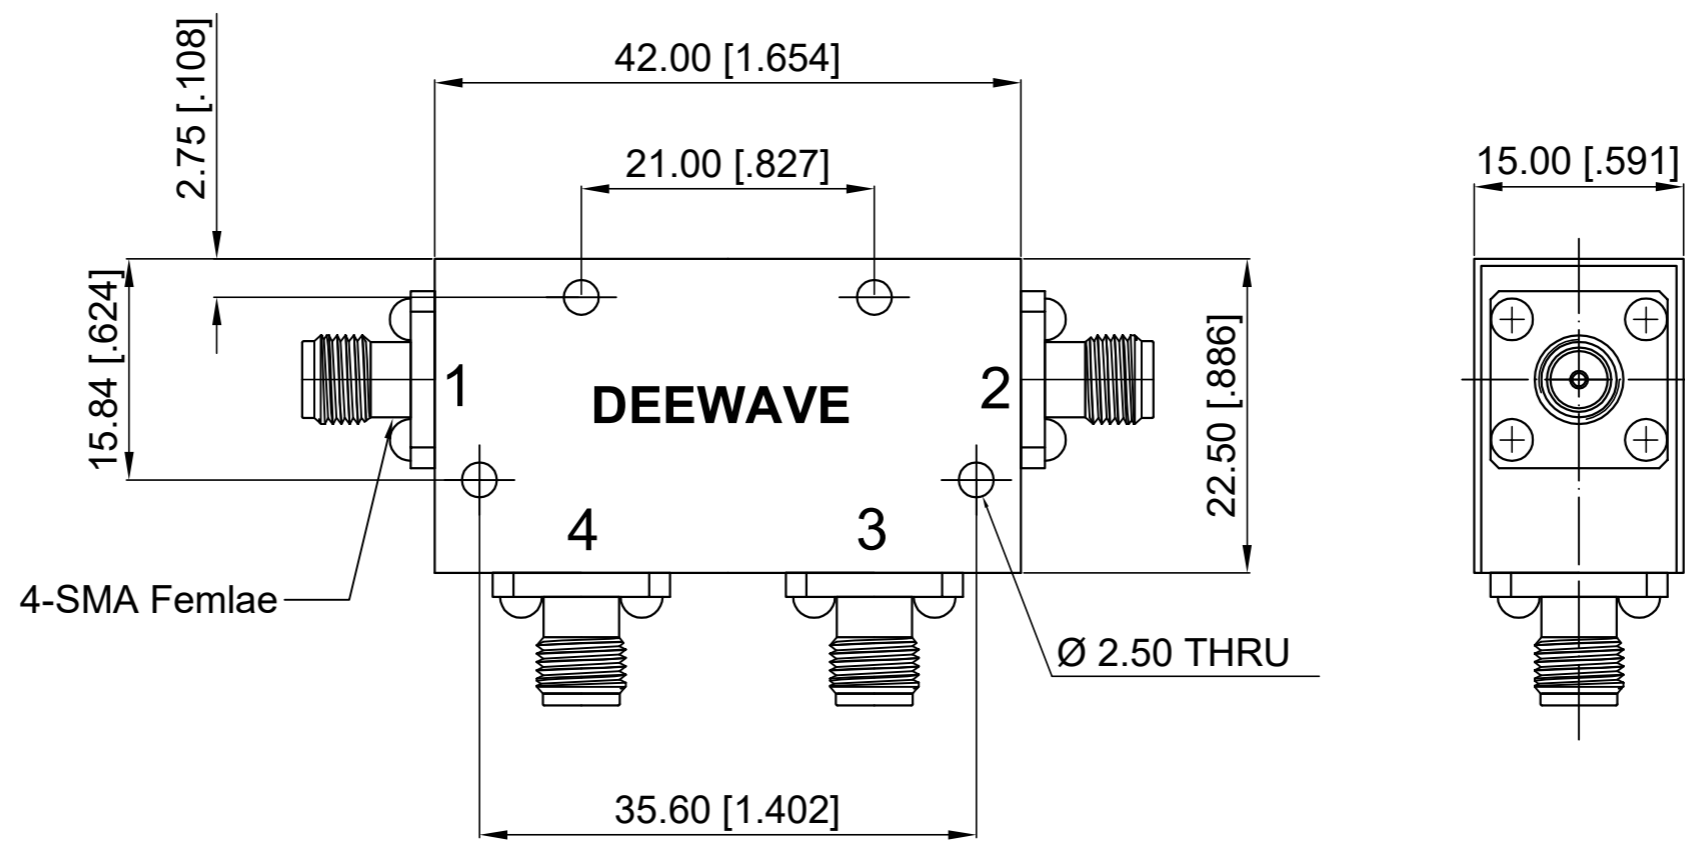

NOTES:
 1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
 2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

Drawn:	W. Y 2023.11.6
Checked:	T. L 2023.11.6
Approved:	A. M 2023.11.6
Unless Otherwise Specified Dimensions are in Millimeters, Dimensions in [] are in Inches for Customer Reference Only. Unless Otherwise Specified Tolerance are: .XX ±0.13 [.005"] .X ±0.20 [.008"] X ±0.50 [.019"] .X° ±1° X° ±2°	

Title:
Dual-Junction SMA Female Circulator, Freq 4-8 GHz

Part No:
DDCC400800B



View:	
Size:	A3
Scale:	1:1
Sheet:	1/1
Rev:	B