

ELECTRICAL SPECIFICATIONS

Frequency Range: 140-160 MHz

Insertion Loss : 0.6 dB Max.

Isolation : 20 dB Min.


VSWR: 1.20 Max.

Forward Power: 100 W

Direction: Clockwise

Operation Temp.: 0~+60°C

Revisions			
Rev	Description	Date	Approved:
A	Initial Release	2015.10.31	A. M

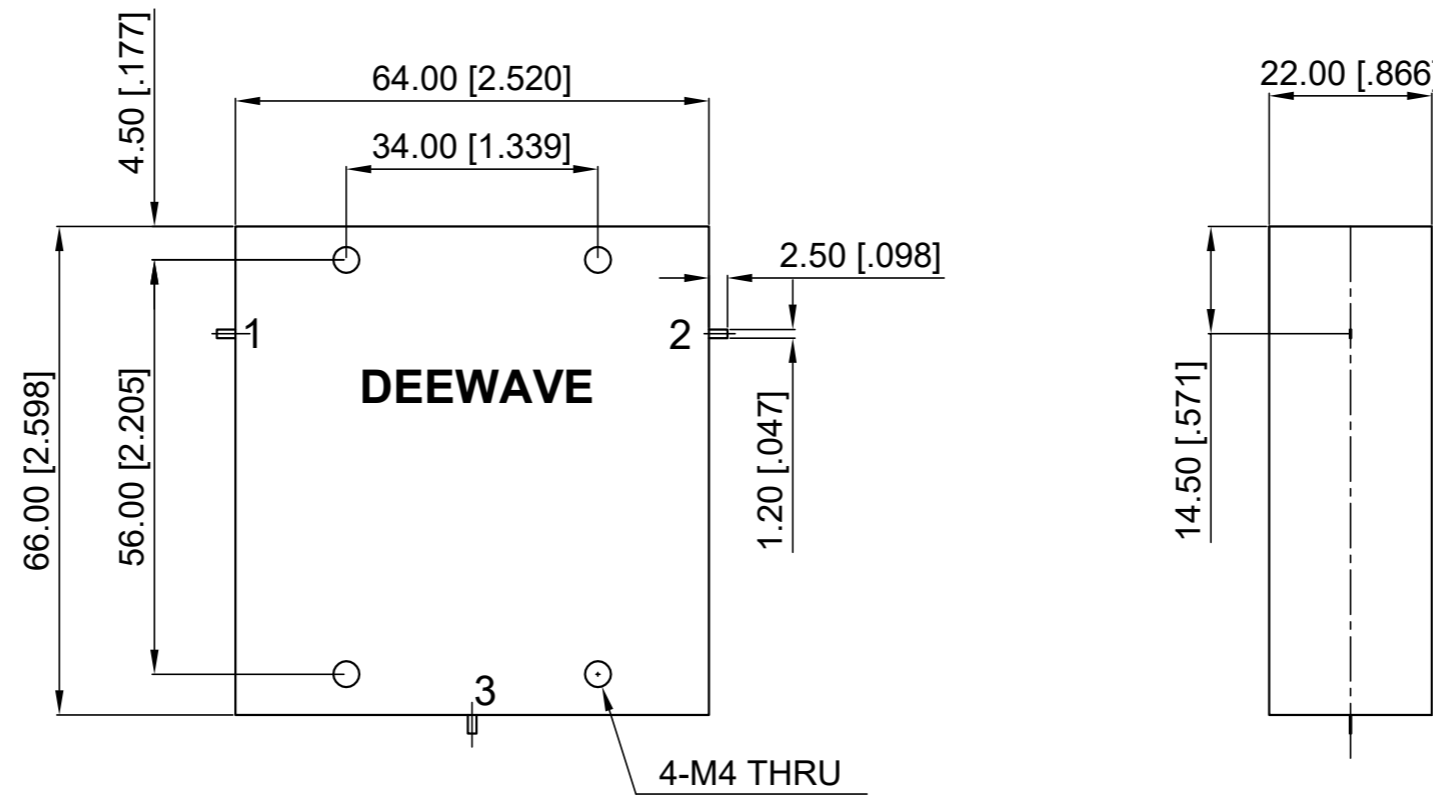



NOTES:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

Drawn:	W. Y 2015.10.31
Checked:	T. L 2015.10.31
Approved:	A. M 2015.10.31
Unless Otherwise Specified Dimensions are in Millimeters, Dimensions in [] are in Inches for Customer Reference Only. Unless Otherwise Specified Tolerance are: .XX ±0.13 [0.005"] .X ±0.20 [0.008"] X ±0.50 [0.019"] .X° ±1° X° ±2°	

Title:	Drop-in Circulator Freq 140-160 MHz
Part No:	

DEEWAVE 
www.deewave.com

View: 

Size:	Scale:	Sheet:	Rev:
A3	1:1	1/1	A